

# Earth Explorer Mission CFI Software

## EXPLORER\_POINTING SOFTWARE USER MANUAL

**Code:** CS-MA-DMS-GS-0005  
**Issue:** 3.4  
**Date:** 18/11/05

	<b>Name</b>	<b>Function</b>	<b>Signature</b>
<b>Prepared by:</b>	Fabrizio Pirondini José Antonio González Abeytua	Project Engineer Project Manager	
<b>Checked by:</b>	José Antonio González Abeytua	Project Manager	
<b>Approved by:</b>	José Antonio González Abeytua	Project Manager	

DEIMOS Space S.L.  
Ronda de Poniente, 19  
Edificio Fiteni VI, Portal 2, 2ª Planta  
28760 Tres Cantos (Madrid), SPAIN  
Tel.: +34 91 806 34 50  
Fax: +34 91 806 34 51  
E-mail: deimos@deimos-space.com

© DEIMOS Space S.L., 2005

All Rights Reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of DEIMOS Space S.L. or ESA.

## Document Information

Contract Data		Classification	
Contract Number:	15583/01/NL/GS	Internal	<input type="checkbox"/>
		Public	<input type="checkbox"/>
Contract Issuer:	ESA / ESTEC	Industry	<input checked="" type="checkbox"/>
		Confidential	<input type="checkbox"/>

External Distribution		
Name	Organisation	Copies

Electronic handling	
Word Processor:	Adobe Framemaker 6.0
Archive Code:	P/SUM/DMS/01/026-024
Electronic file name:	cs-ma-dms-gs-0005-21

## Document Status Log

Issue	Change Description	Date	Approval
0.1	First draft version	23/05/02	
1.0	First release	19/07/02	
2.0	Second release	29/11/02	
2.1	Maintenance release	13/05/03	
2.2	Added the following functions: <ul style="list-style-type: none"> <li>• xp_target_extra_aux</li> <li>• xp_target_extra_target_to_sun</li> <li>• xp_target_extra_ef_to_sat</li> <li>• xp_converter</li> </ul>	30/09/03	
3.0	Completely new initialisation strategy and attitude functions	21/07/04	
3.1	New attitude models implemented. New multitarget functions.	13/10/04	
3.2	DEM Model implementation.	15/11/04	
3.3	New features: <ul style="list-style-type: none"> <li>• xp_target_travel_time</li> <li>• New attitude models (Cryosat YSM, ADM model)</li> <li>• New attitude files for initialisation</li> <li>• Identifier accessors</li> </ul>	11/07/05	
3.4	New features: <ul style="list-style-type: none"> <li>• New attitude model for ADM</li> <li>• xp_dem_compute</li> <li>• xp_target_reflected and xp_target_extra_specular_reflection (only interface definition)</li> <li>• xp_target_extra_target_to_moon</li> <li>• New axis for the generic attitude models:               <ul style="list-style-type: none"> <li>- XP_SC_EF_VEL_VEC</li> <li>- XP_ORBIT_POLE</li> </ul> </li> </ul>		

## Table of Contents

<b>1. SCOPE.....</b>	<b>27</b>
<b>2. ACRONYMS AND NOMENCLATURE.....</b>	<b>28</b>
2.1. Acronyms .....	28
2.2. Nomenclature .....	29
<b>3. APPLICABLE AND REFERENCE DOCUMENTS.....</b>	<b>30</b>
3.1. Applicable Documents .....	30
3.2. Reference Documents .....	30
<b>4. INTRODUCTION.....</b>	<b>31</b>
4.1. Functions Overview .....	31
4.1.1. Attitude Data Flow .....	32
4.1.2. Geolocation Routines Data Flow.....	34
4.1.2.1. <i>LOS targets</i> .....	38
4.1.2.2. <i>DEM targets</i> .....	39
<b>5. LIBRARY INSTALLATION.....</b>	<b>40</b>
<b>6. LIBRARY USAGE.....</b>	<b>41</b>
6.1. Usage hints .....	44
6.2. General Enumerations .....	45
6.3. Data Structures .....	52
<b>7. CFI FUNCTIONS DESCRIPTION.....</b>	<b>57</b>
7.1. xp_sat_nominal_att_init.....	58
7.1.1. Overview .....	58
7.1.2. Calling Interface .....	58
7.1.3. Input Parameters .....	59
7.1.4. Output Parameters .....	59
7.1.5. Warnings and Errors.....	59
7.1.6. Runtime Performances .....	59
7.2. xp_sat_nominal_att_init_model.....	61
7.2.1. Overview .....	61
7.2.2. Calling Interface .....	61
7.2.3. Input Parameters.....	62
7.2.3.1. <i>Generic Model description</i> .....	62
7.2.4. Output Parameters .....	64
7.2.5. Warnings and Errors.....	64
7.2.6. Runtime Performances .....	64
7.3. xp_sat_nominal_att_init_harmonic.....	65
7.3.1. Overview .....	65

---

7.3.2. Calling Interface .....	65
7.3.3. Input Parameters .....	67
7.3.4. Output Parameters .....	68
7.3.5. Example .....	68
7.3.6. Warnings and Errors .....	69
7.3.7. Runtime Performances .....	69
7.4. xp_sat_nominal_att_init_file .....	70
7.4.1. Overview .....	70
7.4.2. Calling Interface .....	70
7.4.3. Input Parameters .....	71
7.4.4. Output Parameters .....	72
7.4.5. Warnings and Errors .....	72
7.4.6. Runtime Performances .....	73
7.5. xp_sat_nominal_att_close .....	74
7.5.1. Overview .....	74
7.5.2. Calling Interface .....	74
7.5.3. Input Parameters .....	75
7.5.4. Output Parameters .....	75
7.5.5. Warnings and Errors .....	75
7.5.6. Runtime Performances .....	76
7.6. xp_sat_nominal_att_get_aocs .....	77
7.6.1. Overview .....	77
7.6.2. Calling interface .....	77
7.6.3. Input parameters .....	77
7.6.4. Output parameters .....	77
7.6.5. Warnings and errors .....	78
7.6.6. Runtime performances.....	78
7.7. xp_sat_nominal_att_set_aocs .....	79
7.7.1. Overview .....	79
7.7.2. Calling interface .....	79
7.7.3. Input parameters .....	79
7.7.4. Output parameters .....	79
7.7.5. Warnings and errors .....	80
7.7.6. Runtime performances.....	80
7.8. xp_sat_nominal_att_get_param .....	81
7.8.1. Overview .....	81
7.8.2. Calling interface .....	81
7.8.3. Input parameters .....	81
7.8.4. Output parameters .....	81
7.8.5. Warnings and errors .....	82
7.8.6. Runtime performances.....	82
7.9. xp_sat_nominal_att_set_param .....	83
7.9.1. Overview .....	83
7.9.2. Calling interface .....	83
7.9.3. Input parameters .....	83

---

7.9.4. Output parameters .....	83
7.9.5. Warnings and errors .....	84
7.9.6. Runtime performances.....	84
7.10. xp_sat_nominal_att_get_harmonic .....	85
7.10.1. Overview .....	85
7.10.2. Calling interface .....	85
7.10.3. Input parameters .....	85
7.10.4. Output parameters .....	85
7.10.5. Warnings and errors .....	86
7.10.6. Runtime performances.....	86
7.11. xp_sat_nominal_att_set_harmonic .....	87
7.11.1. Overview .....	87
7.11.2. Calling interface .....	87
7.11.3. Input parameters .....	87
7.11.4. Output parameters .....	87
7.11.5. Warnings and errors .....	88
7.11.6. Runtime performances.....	88
7.12. xp_sat_nominal_att_get_file .....	89
7.12.1. Overview .....	89
7.12.2. Calling interface .....	89
7.12.3. Input parameters .....	89
7.12.4. Output parameters .....	89
7.12.5. Warnings and errors .....	90
7.12.6. Runtime performances.....	90
7.13. xp_sat_nominal_att_set_file.....	91
7.13.1. Overview .....	91
7.13.2. Calling interface .....	91
7.13.3. Input parameters .....	91
7.13.4. Output parameters .....	91
7.13.5. Warnings and errors .....	92
7.13.6. Runtime performances.....	92
7.14. xp_sat_att_angle_init .....	93
7.14.1. Overview .....	93
7.14.2. Calling Interface .....	93
7.14.3. Input Parameters .....	94
7.14.4. Output Parameters .....	94
7.14.5. Warnings and Errors .....	94
7.14.6. Runtime Performances .....	95
7.15. xp_sat_att_matrix_init.....	96
7.15.1. Overview .....	96
7.15.2. Calling Interface .....	96
7.15.3. Input Parameters .....	97
7.15.4. Output Parameters .....	97
7.15.5. Example .....	97
7.15.6. Warnings and Errors .....	97

---

7.15.7. Runtime Performances .....	98
7.16. xp_sat_att_init_harmonic .....	99
7.16.1. Overview .....	99
7.16.2. Calling Interface .....	99
7.16.3. Input Parameters .....	101
7.16.4. Output Parameters .....	102
7.16.5. Warnings and Errors .....	102
7.16.6. Runtime Performances .....	103
7.17. xp_sat_att_init_file .....	104
7.17.1. Overview .....	104
7.17.2. Calling Interface .....	104
7.17.3. Input Parameters .....	105
7.17.4. Output Parameters .....	106
7.17.5. Warnings and Errors .....	106
7.17.6. Runtime Performances .....	107
7.18. xp_sat_att_close .....	108
7.18.1. Overview .....	108
7.18.2. Calling Interface .....	108
7.18.3. Input Parameters .....	109
7.18.4. Output Parameters .....	109
7.18.5. Warnings and Errors .....	109
7.18.6. Runtime Performances .....	110
7.19. xp_sat_att_get_angles .....	111
7.19.1. Overview .....	111
7.19.2. Calling interface .....	111
7.19.3. Input parameters .....	111
7.19.4. Output parameters .....	111
7.19.5. Warnings and errors .....	112
7.19.6. Runtime performances .....	112
7.20. xp_sat_att_set_angles .....	113
7.20.1. Overview .....	113
7.20.2. Calling interface .....	113
7.20.3. Input parameters .....	113
7.20.4. Output parameters .....	113
7.20.5. Warnings and errors .....	114
7.20.6. Runtime performances .....	114
7.21. xp_sat_att_get_matrix .....	115
7.21.1. Overview .....	115
7.21.2. Calling interface .....	115
7.21.3. Input parameters .....	115
7.21.4. Output parameters .....	115
7.21.5. Warnings and errors .....	116
7.21.6. Runtime performances .....	116
7.22. xp_sat_att_set_matrix .....	117
7.22.1. Overview .....	117

---

7.22.2. Calling interface .....	117
7.22.3. Input parameters .....	117
7.22.4. Output parameters .....	117
7.22.5. Warnings and errors .....	118
7.22.6. Runtime performances.....	118
<b>7.23. xp_sat_att_get_harmonic .....</b>	<b>119</b>
7.23.1. Overview .....	119
7.23.2. Calling interface .....	119
7.23.3. Input parameters .....	119
7.23.4. Output parameters .....	119
7.23.5. Warnings and errors .....	120
7.23.6. Runtime performances.....	120
<b>7.24. xp_sat_att_set_harmonic .....</b>	<b>121</b>
7.24.1. Overview .....	121
7.24.2. Calling interface .....	121
7.24.3. Input parameters .....	121
7.24.4. Output parameters .....	121
7.24.5. Warnings and errors .....	122
7.24.6. Runtime performances.....	122
<b>7.25. xp_sat_att_get_file .....</b>	<b>123</b>
7.25.1. Overview .....	123
7.25.2. Calling interface .....	123
7.25.3. Input parameters .....	123
7.25.4. Output parameters .....	123
7.25.5. Warnings and errors .....	124
7.25.6. Runtime performances.....	124
<b>7.26. xp_sat_att_set_file.....</b>	<b>125</b>
7.26.1. Overview .....	125
7.26.2. Calling interface .....	125
7.26.3. Input parameters .....	125
7.26.4. Output parameters .....	125
7.26.5. Warnings and errors .....	126
7.26.6. Runtime performances.....	126
<b>7.27. xp_instr_att_angle_init.....</b>	<b>127</b>
7.27.1. Overview .....	127
7.27.2. Calling Interface .....	127
7.27.3. Input Parameters .....	128
7.27.4. Output Parameters .....	128
7.27.5. Warnings and Errors.....	128
7.27.6. Runtime Performances .....	129
<b>7.28. xp_instr_att_matrix_init .....</b>	<b>130</b>
7.28.1. Overview .....	130
7.28.2. Calling Interface .....	130
7.28.3. Input Parameters .....	131
7.28.4. Output Parameters .....	131



---

7.28.5. Example .....	131
7.28.6. Warnings and Errors .....	131
7.28.7. Runtime Performances .....	132
7.29. xp_instr_att_init_harmonic .....	133
7.29.1. Overview .....	133
7.29.2. Calling Interface .....	133
7.29.3. Input Parameters .....	135
7.29.4. Output Parameters .....	136
7.29.5. Warnings and Errors .....	136
7.29.6. Runtime Performances .....	137
7.30. xp_instr_att_init_file .....	138
7.30.1. Overview .....	138
7.30.2. Calling Interface .....	138
7.30.3. Input Parameters .....	139
7.30.4. Output Parameters .....	139
7.30.5. Warnings and Errors .....	140
7.30.6. Runtime Performances .....	140
7.31. xp_instr_att_close.....	141
7.31.1. Overview .....	141
7.31.2. Calling Interface .....	141
7.31.3. Input Parameters .....	142
7.31.4. Output Parameters .....	142
7.31.5. Warnings and Errors .....	142
7.31.6. Runtime Performances .....	142
7.32. xp_instr_att_get_angles.....	144
7.32.1. Overview .....	144
7.32.2. Calling interface .....	144
7.32.3. Input parameters .....	144
7.32.4. Output parameters .....	144
7.32.5. Warnings and errors .....	145
7.32.6. Runtime performances.....	145
7.33. xp_instr_att_set_angles .....	146
7.33.1. Overview .....	146
7.33.2. Calling interface .....	146
7.33.3. Input parameters .....	146
7.33.4. Output parameters .....	146
7.33.5. Warnings and errors .....	147
7.33.6. Runtime performances.....	147
7.34. xp_instr_att_get_matrix .....	148
7.34.1. Overview .....	148
7.34.2. Calling interface .....	148
7.34.3. Input parameters .....	148
7.34.4. Output parameters .....	148
7.34.5. Warnings and errors .....	149
7.34.6. Runtime performances.....	149

---

7.35. xp_instr_att_set_matrix .....	150
7.35.1. Overview .....	150
7.35.2. Calling interface .....	150
7.35.3. Input parameters .....	150
7.35.4. Output parameters .....	150
7.35.5. Warnings and errors .....	151
7.35.6. Runtime performances.....	151
7.36. xp_instr_att_get_harmonic .....	152
7.36.1. Overview .....	152
7.36.2. Calling interface .....	152
7.36.3. Input parameters .....	152
7.36.4. Output parameters .....	152
7.36.5. Warnings and errors .....	153
7.36.6. Runtime performances.....	153
7.37. xp_instr_att_set_harmonic .....	154
7.37.1. Overview .....	154
7.37.2. Calling interface .....	154
7.37.3. Input parameters .....	154
7.37.4. Output parameters .....	154
7.37.5. Warnings and errors .....	155
7.37.6. Runtime performances.....	155
7.38. xp_instr_att_get_file.....	156
7.38.1. Overview .....	156
7.38.2. Calling interface .....	156
7.38.3. Input parameters .....	156
7.38.4. Output parameters .....	156
7.38.5. Warnings and errors .....	157
7.38.6. Runtime performances.....	157
7.39. xp_instr_att_set_file .....	158
7.39.1. Overview .....	158
7.39.2. Calling interface .....	158
7.39.3. Input parameters .....	158
7.39.4. Output parameters .....	158
7.39.5. Warnings and errors .....	159
7.39.6. Runtime performances.....	159
7.40. xp_run_init .....	160
7.40.1. Overview .....	160
7.40.2. Calling interface .....	160
7.40.3. Input parameters .....	161
7.40.4. Output parameters .....	161
7.40.5. Warnings and errors .....	161
7.40.6. Runtime performances.....	162
7.41. xp_run_get_ids .....	163
7.41.1. Overview .....	163
7.41.2. Calling interface .....	163

7.41.3. Input parameters .....	164
7.41.4. Output parameters .....	164
7.41.5. Warnings and errors .....	164
7.41.6. Runtime performances.....	164
7.42. xp_run_close .....	165
7.42.1. Overview .....	165
7.42.2. Calling interface .....	165
7.42.3. Input parameters .....	166
7.42.4. Output parameters .....	166
7.42.5. Warnings and errors .....	166
7.42.6. Runtime performances.....	166
7.43. xp_attitude_init.....	167
7.43.1. Overview .....	167
7.43.2. Calling Interface .....	167
7.43.3. Input Parameters .....	168
7.43.4. Output Parameters .....	168
7.43.5. Warnings and Errors .....	168
7.43.6. Runtime Performances .....	168
7.44. xp_attitude_compute .....	169
7.44.1. Overview .....	169
7.44.2. Calling interface .....	169
7.44.3. Input parameters .....	170
7.44.4. Output parameters .....	171
7.44.5. Warnings and errors .....	171
7.44.6. Runtime performances.....	172
7.45. xp_attitude_user_set.....	173
7.45.1. Overview .....	173
7.45.2. Calling interface .....	173
7.45.3. Input parameters .....	174
7.45.4. Output parameters .....	175
7.45.5. Warnings and errors .....	175
7.45.6. Runtime performances.....	176
7.46. xp_attitude_close.....	177
7.46.1. Overview .....	177
7.46.2. Calling Interface .....	177
7.46.3. Input Parameters .....	178
7.46.4. Output Parameters .....	178
7.46.5. Warnings and Errors .....	178
7.46.6. Runtime Performances .....	179
7.47. xp_attitude_get_id_data .....	180
7.47.1. Overview .....	180
7.47.2. Calling interface .....	180
7.47.3. Input parameters .....	180
7.47.4. Output parameters .....	180
7.47.5. Warnings and errors .....	181

---

7.47.6. Runtime performances.....	181
7.48. xp_attitude_set_id_data.....	182
7.48.1. Overview .....	182
7.48.2. Calling interface .....	182
7.48.3. Input parameters .....	182
7.48.4. Output parameters .....	182
7.48.5. Warnings and errors .....	183
7.48.6. Runtime performances.....	183
7.49. xp_change_frame .....	184
7.49.1. Overview .....	184
7.49.2. Calling interface .....	184
7.49.3. Input parameters .....	186
7.49.4. Output parameters .....	187
7.49.5. Warnings and errors .....	187
7.49.6. Runtime performances.....	188
7.50. xp_atmos_init.....	189
7.50.1. Overview .....	189
7.50.2. Calling Interface .....	189
7.50.3. Input Parameters.....	190
7.50.4. Output Parameters .....	190
7.50.5. Warnings and Errors.....	190
7.50.6. Runtime Performances .....	191
7.51. xp_atmos_close .....	192
7.51.1. Overview .....	192
7.51.2. Calling Interface .....	192
7.51.3. Input Parameters.....	193
7.51.4. Output Parameters .....	193
7.51.5. Warnings and Errors.....	193
7.51.6. Runtime Performances .....	194
7.52. xp_atmos_get_id_data.....	195
7.52.1. Overview .....	195
7.52.2. Calling interface .....	195
7.52.3. Input parameters .....	195
7.52.4. Output parameters .....	195
7.52.5. Warnings and errors .....	196
7.52.6. Runtime performances.....	196
7.53. xp_dem_init.....	197
7.53.1. Overview .....	197
7.53.2. Calling Interface .....	197
7.53.3. Input Parameters.....	198
7.53.4. Output Parameters .....	198
7.53.5. Warnings and Errors.....	198
7.53.6. Runtime Performances .....	199
7.54. xp_dem_close.....	200
7.54.1. Overview .....	200

---

7.54.2. Calling Interface .....	200
7.54.3. Input Parameters .....	201
7.54.4. Output Parameters .....	201
7.54.5. Warnings and Errors .....	201
7.54.6. Runtime Performances .....	202
7.55. xp_dem_compute .....	203
7.55.1. Overview .....	203
7.55.2. Calling Interface .....	203
7.55.3. Input Parameters .....	204
7.55.4. Output Parameters .....	204
7.55.5. Warnings and Errors .....	204
7.55.6. Runtime Performances .....	205
7.56. xp_dem_get_id_data .....	206
7.56.1. Overview .....	206
7.56.2. Calling interface .....	206
7.56.3. Input parameters .....	206
7.56.4. Output parameters .....	206
7.56.5. Warnings and errors .....	207
7.56.6. Runtime performances.....	207
7.57. xp_target_inter .....	208
7.57.1. Overview .....	208
7.57.2. Calling Interface .....	208
7.57.3. Input Parameters .....	210
7.57.4. Output Parameters .....	211
7.57.5. Warnings and Errors .....	211
7.57.6. Runtime Performances .....	212
7.58. xp_target_ground_range.....	213
7.58.1. Overview .....	213
7.58.2. Calling Interface .....	213
7.58.3. Input Parameters .....	215
7.58.4. Output Parameters .....	216
7.58.5. Warnings and Errors .....	216
7.58.6. Runtime Performances .....	217
7.59. xp_target_incidence_angle.....	218
7.59.1. Overview .....	218
7.59.2. Calling Interface .....	218
7.59.3. Input Parameters .....	220
7.59.4. Output Parameters .....	221
7.59.5. Warnings and Errors .....	221
7.59.6. Runtime Performances .....	222
7.60. xp_target_range .....	223
7.60.1. Overview .....	223
7.60.2. Calling Interface .....	223
7.60.3. Input Parameters .....	225
7.60.4. Output Parameters .....	226

---

7.60.5. Warnings and Errors .....	226
7.60.6. Runtime Performances .....	227
7.61. xp_target_range_rate .....	228
7.61.1. Overview .....	228
7.61.2. Calling Interface .....	228
7.61.3. Input Parameters .....	230
7.61.4. Output Parameters .....	231
7.61.5. Warnings and Errors .....	231
7.61.6. Runtime Performances .....	232
7.62. xp_target_tangent .....	233
7.62.1. Overview .....	233
7.62.2. Calling Interface .....	233
7.62.3. Input Parameters .....	235
7.62.4. Output Parameters .....	236
7.62.5. Warnings and Errors .....	236
7.62.6. Runtime Performances .....	237
7.63. xp_target_altitude .....	238
7.63.1. Overview .....	238
7.63.2. Calling Interface .....	238
7.63.3. Input Parameters .....	240
7.63.4. Output Parameters .....	241
7.63.5. Warnings and Errors .....	241
7.63.6. Runtime Performances .....	242
7.64. xp_target_star .....	243
7.64.1. Overview .....	243
7.64.2. Calling Interface .....	243
7.64.3. Input Parameters .....	245
7.64.4. Output Parameters .....	246
7.64.5. Warnings and Errors .....	246
7.64.6. Runtime Performances .....	247
7.65. xp_target_station .....	248
7.65.1. Overview .....	248
7.65.2. Calling Interface .....	248
7.65.3. Input Parameters .....	250
7.65.4. Output Parameters .....	251
7.65.5. Warnings and Errors .....	251
7.65.6. Runtime Performances .....	252
7.66. xp_target_drs .....	253
7.66.1. Overview .....	253
7.66.2. Calling Interface .....	253
7.66.3. Input Parameters .....	254
7.66.4. Output Parameters .....	255
7.66.5. Warnings and Errors .....	255
7.66.6. Runtime Performances .....	256
7.67. xp_target_generic .....	257

---

7.67.1. Overview .....	257
7.67.2. Calling Interface .....	257
7.67.3. Input Parameters .....	258
7.67.4. Output Parameters .....	259
7.67.5. Warnings and Errors .....	259
7.67.6. Runtime Performances .....	260
7.68. xp_target_reflected .....	261
7.68.1. Overview .....	261
7.68.2. Calling Interface .....	261
7.68.3. Input Parameters .....	262
7.68.4. Output Parameters .....	263
7.68.5. Warnings and Errors .....	263
7.68.6. Runtime Performances .....	263
7.69. xp_target_travel_time .....	264
7.69.1. Overview .....	264
7.69.2. Calling Interface .....	264
7.69.3. Input Parameters .....	266
7.69.4. Output Parameters .....	267
7.69.5. Warnings and Errors .....	267
7.69.6. Runtime Performances .....	269
7.70. xp_target_tangent_sun .....	270
7.70.1. Overview .....	270
7.70.2. Calling Interface .....	270
7.70.3. Input Parameters .....	272
7.70.4. Output Parameters .....	272
7.70.5. Warnings and Errors .....	273
7.70.6. Runtime Performances .....	274
7.71. xp_target_tangent_moon .....	275
7.71.1. Overview .....	275
7.71.2. Calling Interface .....	275
7.71.3. Input Parameters .....	276
7.71.4. Output Parameters .....	277
7.71.5. Warnings and Errors .....	277
7.71.6. Runtime Performances .....	278
7.72. xp_multi_target_inter .....	279
7.72.1. Overview .....	279
7.72.2. Calling Interface .....	279
7.72.3. Input Parameters .....	281
7.72.4. Output Parameters .....	282
7.72.5. Warnings and Errors .....	282
7.72.6. Runtime Performances .....	284
7.73. xp_multi_target_travel_time .....	285
7.73.1. Overview .....	285
7.73.2. Calling Interface .....	285
7.73.3. Input Parameters .....	287

---

7.73.4. Output Parameters .....	288
7.73.5. Warnings and Errors.....	288
7.73.6. Runtime Performances .....	290
7.74. xp_target_extra_vector.....	291
7.74.1. Overview .....	291
7.74.2. Calling Interface .....	291
7.74.3. Input Parameters.....	292
7.74.4. Output Parameters .....	293
7.74.5. Warnings and Errors.....	294
7.74.6. Runtime Performances .....	295
7.75. xp_target_extra_main.....	296
7.75.1. Overview .....	296
7.75.2. Calling Interface .....	296
7.75.3. Input Parameters.....	297
7.75.4. Output Parameters .....	298
7.75.5. Warnings and Errors.....	300
7.75.6. Runtime Performances .....	301
7.76. xp_target_extra_aux .....	303
7.76.1. Overview .....	303
7.76.2. Calling Interface .....	303
7.76.3. Input Parameters.....	304
7.76.4. Output Parameters .....	305
7.76.5. Warnings and Errors.....	307
7.76.6. Runtime Performances .....	308
7.77. xp_target_extra_ef_target.....	309
7.77.1. Overview .....	309
7.77.2. Calling Interface .....	309
7.77.3. Input Parameters.....	310
7.77.4. Output Parameters .....	311
7.77.5. Warnings and Errors.....	312
7.77.6. Runtime Performances .....	313
7.78. xp_target_extra_target_to_sun .....	314
7.78.1. Overview .....	314
7.78.2. Calling Interface .....	314
7.78.3. Input Parameters.....	315
7.78.4. Output Parameters .....	316
7.78.5. Warnings and Errors.....	317
7.78.6. Runtime Performances .....	318
7.79. xp_target_extra_target_to_moon .....	319
7.79.1. Overview .....	319
7.79.2. Calling Interface .....	319
7.79.3. Input Parameters.....	320
7.79.4. Output Parameters .....	321
7.79.5. Warnings and Errors.....	322
7.79.6. Runtime Performances .....	323



7.80. xp_target_extra_specular_reflectionn .....	324
7.80.1. Overview .....	324
7.80.2. Calling Interface .....	324
7.80.3. Input Parameters .....	324
7.80.4. Output Parameters .....	326
7.80.5. Warnings and Errors .....	328
7.80.6. Runtime Performances .....	328
7.81. xp_target_close.....	329
7.81.1. Overview .....	329
7.81.2. Calling Interface .....	329
7.81.3. Input Parameters .....	330
7.81.4. Output Parameters .....	330
7.81.5. Warnings and Errors .....	330
7.81.6. Runtime Performances .....	330
7.82. xp_target_get_id_data .....	331
7.82.1. Overview .....	331
7.82.2. Calling interface .....	331
7.82.3. Input parameters .....	331
7.82.4. Output parameters .....	331
7.82.5. Warnings and errors .....	332
7.82.6. Runtime performances.....	332
7.83. xp_converter.....	333
7.83.1. Overview .....	333
7.83.2. Calling interface .....	334
7.83.3. Input parameters .....	334
7.83.4. Output .....	335
<b>8. LIBRARY PRECAUTIONS.....</b>	<b>337</b>
<b>9. KNOWN PROBLEMS.....</b>	<b>338</b>

## List of Tables

Table 1:	xp_target functions.....	35
Table 2:	CFI functions included within EXPLORER_POINTING library (TO BE UPDATED) 42	
Table 3:	Enumerations within EXPLORER_POINTING library .....	45
Table 4:	EXPLORER_POINTING structures .....	52
Table 5:	Input parameters of xp_sat_nominal_att_init .....	59
Table 6:	Output parameters of xp_sat_nominal_att_init.....	59
Table 7:	Error messages of xp_sat_nominal_att_init .....	59
Table 8:	Runtime performances of xp_sat_nominal_att_init.....	60
Table 9:	Input parameters of xp_sat_nominal_att_init_model .....	62
Table 10:	Model parameters depending on the attitude model .....	62
Table 11:	Output parameters of xp_sat_nominal_att_init_model.....	64
Table 12:	Error messages of xp_sat_nominal_att_init_model .....	64
Table 13:	Runtime performances of xp_sat_nominal_att_init_model.....	64
Table 14:	Input parameters of xp_sat_nominal_att_init_harmonic.....	67
Table 15:	Output parameters of xp_sat_nominal_att_init_harmonic .....	68
Table 16:	Error messages of xp_sat_nominal_att_init_harmonic .....	69
Table 17:	Runtime performances of xp_sat_att_nominal_init_harmonic.....	69
Table 18:	Input parameters of xp_sat_nominal_att_init_file.....	71
Table 19:	Output parameters of xp_sat_nominal_att_init_file .....	72
Table 20:	Error messages of xp_sat_nominal_att_init_file .....	72
Table 21:	Runtime performances of xp_sat_nominal_att_init_file .....	73
Table 22:	Input parameters of xp_sat_nominal_att_close .....	75
Table 23:	Output parameters of xp_sat_nominal_att_close.....	75
Table 24:	Error messages of xp_sat_nominal_att_close .....	75
Table 25:	Runtime performances of xp_sat_nominal_att_close.....	76
Table 26:	Input parameters of xp_sat_nominal_att_get_aocs .....	77
Table 27:	Output parameters of xp_sat_nominal_att_get_aocs.....	77
Table 28:	Runtime performances of xp_sat_nominal_att_get_aocs.....	78
Table 29:	Input parameters of xp_sat_nominal_att_set_aocs.....	79
Table 30:	Output parameters of xp_sat_nominal_att_set_aocs .....	80
Table 31:	Runtime performances of xp_sat_nominal_att_set_aocs .....	80
Table 32:	Input parameters of xp_sat_nominal_att_get_param .....	81
Table 33:	Output parameters of xp_sat_nominal_att_get_param.....	82
Table 34:	Runtime performances of xp_sat_nominal_att_get_param.....	82
Table 35:	Input parameters of xp_sat_nominal_att_set_param.....	83
Table 36:	Output parameters of xp_sat_nominal_att_set_param .....	84

---

Table 37:	Runtime performances of xp_sat_nominal_att_set_param function .....	84
Table 38:	Input parameters of xp_sat_nominal_att_get_harmonic function .....	85
Table 39:	Output parameters of xp_sat_nominal_att_get_harmonic function.....	86
Table 40:	Runtime performances of xp_sat_nominal_att_get_harmonic function....	86
Table 41:	Input parameters of xp_sat_nominal_att_set_harmonic function.....	87
Table 42:	Output parameters of xp_sat_nominal_att_set_harmonic function .....	88
Table 43:	Runtime performances of xp_sat_nominal_att_set_harmonic function ...	88
Table 44:	Input parameters of xp_sat_nominal_att_get_file function .....	89
Table 45:	Output parameters of xp_sat_nominal_att_get_file function .....	90
Table 46:	Runtime performances of xp_sat_nominal_att_get_file function .....	90
Table 47:	Input parameters of xp_sat_nominal_att_set_file function .....	91
Table 48:	Output parameters of xp_sat_nominal_att_set_file function.....	92
Table 49:	Runtime performances of xp_sat_nominal_att_set_file function .....	92
Table 50:	Input parameters of xp_sat_att_angle_init function .....	94
Table 51:	Output parameters of xp_sat_att_angle_init .....	94
Table 52:	Error messages of xp_sat_att_angle_init function.....	94
Table 53:	Runtime performances of xp_sat_att_angle_init .....	95
Table 54:	Input parameters of xp_sat_att_matrix_init function.....	97
Table 55:	Output parameters of xp_sat_att_matrix_init .....	97
Table 56:	Error messages of xp_sat_att_matrix_init function .....	97
Table 57:	Runtime performances of xp_sat_att_matrix_init .....	98
Table 58:	Input parameters of xp_sat_att_init_harmonic .....	101
Table 59:	Output parameters of xp_sat_att_init_harmonic.....	102
Table 60:	Error messages of xp_sat_att_init_harmonic .....	103
Table 61:	Runtime performances of xp_sat_att_init_harmonic.....	103
Table 62:	Input parameters of xp_sat_att_init_file .....	105
Table 63:	Output parameters of xp_sat_att_init_file .....	106
Table 64:	Error messages of xp_sat_att_init_file .....	107
Table 65:	Runtime performances of xp_sat_att_init_file .....	107
Table 66:	Input parameters of xp_sat_att_close .....	109
Table 67:	Output parameters of xp_sat_att_close.....	109
Table 68:	Error messages of xp_sat_att_close .....	109
Table 69:	Runtime performances of xp_sat_att_close .....	110
Table 70:	Input parameters of xp_sat_att_get_angles .....	111
Table 71:	Output parameters of xp_sat_att_get_angles.....	111
Table 72:	Runtime performances of xp_sat_att_get_angles.....	112
Table 73:	Input parameters of xp_sat_att_set_angles.....	113
Table 74:	Output parameters of xp_sat_att_set_angles .....	114
Table 75:	Runtime performances of xp_sat_att_set_angles .....	114
Table 76:	Input parameters of xp_sat_att_get_matrix .....	115

---

Table 77:	Output parameters of xp_sat_att_get_matrix function .....	116
Table 78:	Runtime performances of xp_sat_att_get_matrix function .....	116
Table 79:	Input parameters of xp_sat_att_set_matrix function .....	117
Table 80:	Output parameters of xp_sat_att_set_matrix function.....	118
Table 81:	Runtime performances of xp_sat_att_set_matrix function.....	118
Table 82:	Input parameters of xp_sat_att_get_harmonic function .....	119
Table 83:	Output parameters of xp_sat_att_get_harmonic function.....	120
Table 84:	Runtime performances of xp_sat_att_get_harmonic function.....	120
Table 85:	Input parameters of xp_sat_att_set_harmonic function.....	121
Table 86:	Output parameters of xp_sat_att_set_harmonic function .....	122
Table 87:	Runtime performances of xp_sat_att_set_harmonic function .....	122
Table 88:	Input parameters of xp_sat_att_get_file function .....	123
Table 89:	Output parameters of xp_sat_att_get_file function .....	124
Table 90:	Runtime performances of xp_sat_att_get_file function.....	124
Table 91:	Input parameters of xp_sat_att_set_file function.....	125
Table 92:	Output parameters of xp_sat_att_set_file function .....	126
Table 93:	Runtime performances of xp_sat_att_set_file function .....	126
Table 94:	Input parameters of xp_instr_att_angle_init function.....	128
Table 95:	Output parameters of xp_instr_att_angle_init .....	128
Table 96:	Error messages of xp_instr_att_angle_init function .....	129
Table 97:	Runtime performances of xp_instr_att_angle_init .....	129
Table 98:	Input parameters of xp_instr_att_matrix_init .....	131
Table 99:	Output parameters of xp_instr_att_matrix_init.....	131
Table 100:	Error messages of xp_instr_att_matrix_init function .....	132
Table 101:	Runtime performances of xp_instr_att_matrix_init.....	132
Table 102:	Input parameters of xp_instr_att_init_harmonic function .....	135
Table 103:	Output parameters of xp_instr_att_init_harmonic .....	136
Table 104:	Error messages of xp_instr_att_init_harmonic function.....	137
Table 105:	Runtime performances of xp_instr_att_init_harmonic .....	137
Table 106:	Input parameters of xp_instr_att_init_file function .....	139
Table 107:	Output parameters of xp_instr_att_init_file.....	139
Table 108:	Error messages of xp_instr_att_init_file function .....	140
Table 109:	Runtime performances of xp_instr_att_init_file.....	140
Table 110:	Input parameters of xp_instr_att_close function .....	142
Table 111:	Output parameters of xp_instr_att_close .....	142
Table 112:	Error messages of xp_instr_att_close function .....	142
Table 113:	Runtime performances of xp_instr_att_close .....	143
Table 114:	Input parameters of xp_instr_att_get_angles function.....	144
Table 115:	Output parameters of xp_instr_att_get_angles function.....	145
Table 116:	Runtime performances of xp_instr_att_get_angles function.....	145

---

Table 117:	Input parameters of xp_instr_att_set_angles function .....	146
Table 118:	Output parameters of xp_instr_att_set_angles function .....	147
Table 119:	Runtime performances of xp_instr_att_set_angles function .....	147
Table 120:	Input parameters of xp_instr_att_get_matrix function .....	148
Table 121:	Output parameters of xp_instr_att_get_matrix function.....	149
Table 122:	Runtime performances of xp_instr_att_get_matrix function.....	149
Table 123:	Input parameters of xp_instr_att_set_matrix function.....	150
Table 124:	Output parameters of xp_instr_att_set_matrix function .....	151
Table 125:	Runtime performances of xp_instr_att_set_matrix function .....	151
Table 126:	Input parameters of xp_instr_att_get_harmonic function.....	152
Table 127:	Output parameters of xp_instr_att_get_harmonic function .....	153
Table 128:	Runtime performances of xp_instr_att_get_harmonic function .....	153
Table 129:	Input parameters of xp_instr_att_set_harmonic function .....	154
Table 130:	Output parameters of xp_instr_att_set_harmonic function .....	155
Table 131:	Runtime performances of xp_instr_att_set_harmonic function.....	155
Table 132:	Input parameters of xp_instr_att_get_file function .....	156
Table 133:	Output parameters of xp_instr_att_get_file function.....	157
Table 134:	Runtime performances of xp_instr_att_get_file function.....	157
Table 135:	Input parameters of xp_instr_att_set_file function .....	158
Table 136:	Output parameters of xp_instr_att_set_file function .....	159
Table 137:	Runtime performances of xp_instr_att_set_file function .....	159
Table 138:	Input parameters of xp_run_init function .....	161
Table 139:	Output parameters of xp_run_init function .....	161
Table 140:	Error messages of xl_run_init function .....	162
Table 141:	Runtime performances of xp_run_init function.....	162
Table 142:	Input parameters of xp_run_get_ids function .....	164
Table 143:	Output parameters of xp_run_get_ids function .....	164
Table 144:	Runtime performances of xp_run_get_ids function .....	164
Table 145:	Input parameters of xp_run_close function .....	166
Table 146:	Output parameters of xp_run_close function.....	166
Table 147:	Runtime performances of xp_run_close function.....	166
Table 148:	Output parameters of xp_attitude_init .....	168
Table 149:	Error messages of xp_attitude_init .....	168
Table 150:	Runtime performances of xp_attitude_init .....	168
Table 151:	Input parameters of xp_attitude_compute function .....	170
Table 152:	Output parameters of xp_attitude_compute function .....	171
Table 153:	Error messages of xp_attitude_compute function .....	171
Table 154:	Runtime performances of xp_attitude_compute function .....	172
Table 155:	Input parameters of xp_attitude_user_set function.....	174
Table 156:	Output parameters of xp_attitude_user_set function .....	175

---

Table 157:	Error messages of xp_attitude_user_set function .....	175
Table 158:	Runtime performances of xp_attitude_user_set function .....	176
Table 159:	Input parameters of xp_attitude_close function.....	178
Table 160:	Output parameters of xp_attitude_close .....	178
Table 161:	Error messages of xp_attitude_close function .....	178
Table 162:	Runtime performances of xp_attitude_close .....	179
Table 163:	Input parameters of xp_attitude_get_id_data function .....	180
Table 164:	Output parameters of xp_attitude_get_id_data function .....	181
Table 165:	Runtime performances of xp_attitude_get_id_data function.....	181
Table 166:	Input parameters of xp_attitude_set_id_data function.....	182
Table 167:	Output parameters of xp_attitude_set_id_data function .....	183
Table 168:	Runtime performances of xp_attitude_set_id_data function .....	183
Table 169:	Input parameters of xp_change_frame function .....	186
Table 170:	Output parameters of xp_change_frame function .....	187
Table 171:	Error messages of xp_change_frame function.....	187
Table 172:	Runtime performances of xp_change_frame function.....	188
Table 173:	Input parameters of xp_atmos_init function .....	190
Table 174:	Output parameters of xp_atmos_init.....	190
Table 175:	Error messages of xp_atmos_init function .....	191
Table 176:	Runtime performances of xp_atmos_init.....	191
Table 177:	Input parameters of xp_atmos_close function .....	193
Table 178:	Output parameters of xp_atmos_close.....	193
Table 179:	Error messages of xp_atmos_close function .....	193
Table 180:	Runtime performances of xp_atmos_close.....	194
Table 181:	Input parameters of xp_atmos_get_id_data function.....	195
Table 182:	Output parameters of xp_atmos_get_id_data function .....	195
Table 183:	Runtime performances of xp_atmos_get_id_data function .....	196
Table 184:	Input parameters of xp_dem_init.....	198
Table 185:	Output parameters of xp_dem_init .....	198
Table 186:	Error messages of xp_dem_init function .....	199
Table 187:	Runtime performances of xp_dem_init .....	199
Table 188:	Input parameters of xp_dem_close function.....	201
Table 189:	Output parameters of xp_dem_close .....	201
Table 190:	Error messages of xp_dem_close function .....	201
Table 191:	Runtime performances of xp_dem_close .....	202
Table 192:	Input parameters of xp_dem_compute function .....	204
Table 193:	Output parameters of xp_dem_compute.....	204
Table 194:	Error messages of xp_dem_compute function.....	204
Table 195:	Runtime performances of xp_dem_compute .....	205
Table 196:	Input parameters of xp_dem_get_id_data function .....	206



---

Table 197:	Output parameters of xp_dem_get_id_data function.....	206
Table 198:	Runtime performances of xp_dem_get_id_data function.....	207
Table 199:	Input parameters of xp_target_inter function .....	210
Table 200:	Output parameters of xp_target_inter .....	211
Table 201:	Error messages of xp_target_inter function .....	211
Table 202:	Runtime performances of xp_target_inter .....	212
Table 203:	Input parameters of xp_target_ground_range function.....	215
Table 204:	Output parameters of xp_target_ground_range .....	216
Table 205:	Error messages of xp_target_ground_range function .....	216
Table 206:	Runtime performances of xp_target_ground_range .....	217
Table 207:	Input parameters of xp_target_incidence_angle function.....	220
Table 208:	Output parameters of xp_target_incidence_angle .....	221
Table 209:	Error messages of xp_target_incidence_angle function .....	221
Table 210:	Runtime performances of xp_target_incidence_angle.....	222
Table 211:	Input parameters of xp_target_range function .....	225
Table 212:	Output parameters of xp_target_range.....	226
Table 213:	Error messages of xp_target_range function .....	226
Table 214:	Runtime performances of xp_target_range.....	227
Table 215:	Input parameters of xp_target_range_rate function .....	230
Table 216:	Output parameters of xp_target_range_rate.....	231
Table 217:	Error messages of xp_target_range_rate function .....	231
Table 218:	Runtime performances of xp_target_range_rate.....	232
Table 219:	Input parameters of xp_target_tangent function .....	235
Table 220:	Output parameters of xp_target_tangent.....	236
Table 221:	Error messages of xp_target_tangent function .....	236
Table 222:	Runtime performances of xp_target_tangent.....	237
Table 223:	Input parameters of xp_target_altitude function.....	240
Table 224:	Output parameters of xp_target_altitude .....	241
Table 225:	Error messages of xp_target_altitude function .....	241
Table 226:	Runtime performances of xp_target_altitude.....	242
Table 227:	Input parameters of xp_target_star function .....	245
Table 228:	Output parameters of xp_target_star.....	246
Table 229:	Error messages of xp_target_star function .....	246
Table 230:	Runtime performances of xp_target_star.....	247
Table 231:	Input parameters of xp_target_station function .....	250
Table 232:	Output parameters of xp_target_station.....	251
Table 233:	Error messages of xp_target_station function.....	251
Table 234:	Runtime performances of xp_target_station.....	252
Table 235:	Input parameters of xp_target_drs function .....	254
Table 236:	Output parameters of xp_target_drs.....	255

---

Table 237:	Error messages of xp_target_drs function .....	255
Table 238:	Runtime performances of xp_target_drs.....	256
Table 239:	Input parameters of xp_target_generic function .....	258
Table 240:	Output parameters of xp_target_generic.....	259
Table 241:	Error messages of xp_target_generic function .....	259
Table 242:	Runtime performances of xp_target_generic.....	260
Table 243:	Input parameters of xp_target_reflected function.....	262
Table 244:	Output parameters of xp_target_reflected .....	263
Table 245:	Error messages of xp_target_reflected function .....	263
Table 246:	Runtime performances of xp_target_reflected.....	263
Table 247:	Input parameters of xp_target_travel_time function.....	266
Table 248:	Output parameters of xp_target_travel_time .....	267
Table 249:	Error messages of xp_target_travel_time function .....	267
Table 250:	Runtime performances of xp_target_travel_time .....	269
Table 251:	Input parameters of xp_target_tangent_sun function .....	272
Table 252:	Output parameters of xp_target_tangent_sun .....	272
Table 253:	Error messages of xp_target_tangent_sun function.....	273
Table 254:	Runtime performances of xp_target_tangent_sun .....	274
Table 255:	Input parameters of xp_tangent_target_moon function.....	276
Table 256:	Output parameters of xp_tangent_target_moon.....	277
Table 257:	Error messages of xp_target_tangent_moon function .....	277
Table 258:	Runtime performances of xp_target_tangent_moon.....	278
Table 259:	Input parameters of xp_multi_target_inter function .....	281
Table 260:	Output parameters of xp_multi_target_inter.....	282
Table 261:	Error messages of xp_multi_target_inter function .....	282
Table 262:	Runtime performances of xp_multi_target_inter.....	284
Table 263:	Input parameters of xp_multi_target_travel_time function .....	287
Table 264:	Output parameters of xp_multi_target_travel_time.....	288
Table 265:	Error messages of xp_multi_target_travel_time function.....	288
Table 266:	Runtime performances of xp_multi_target_travel_time.....	290
Table 267:	Input parameters of xp_target_extra_vector function.....	292
Table 268:	Output parameters of xp_target_extra_vector .....	293
Table 269:	Error messages of xp_target_extra_vector function .....	294
Table 270:	Runtime performances of xp_target_extra_vector.....	295
Table 271:	Input parameters of xp_target_extra_main function.....	297
Table 272:	Output parameters of xp_target_extra_main .....	298
Table 273:	Error messages of xp_target_extra_main function .....	301
Table 274:	Runtime performances of xp_target_extra_main.....	302
Table 275:	Output parameters of xp_target_extra_aux.....	305
Table 276:	Error messages of xp_target_extra_aux function .....	307



---

Table 277:	Runtime performances of xp_target_extra_aux.....	308
Table 278:	Input parameters of xp_target_extra_ef_target function.....	310
Table 279:	Output parameters of xp_target_extra_ef_target .....	311
Table 280:	Error messages of xp_target_extra_ef_target function .....	312
Table 281:	Runtime performances of xp_target_extra_ef_target .....	313
Table 282:	Input parameters of xp_target_extra_target_to_sun function .....	315
Table 283:	Output parameters of xp_target_extra_target_to_sun.....	316
Table 284:	Error messages of xp_target_extra_target_to_sun function.....	317
Table 285:	Runtime performances of xp_target_extra_target_to_sun.....	318
Table 286:	Input parameters of xp_target_extra_target_to_moon function.....	320
Table 287:	Output parameters of xp_target_extra_target_to_moon .....	321
Table 288:	Error messages of xp_target_extra_target_to_moon function.....	322
Table 289:	Runtime performances of xp_target_extra_target_to_moon .....	323
Table 290:	Input parameters of xp_target_extra_specular_reflection .....	325
Table 291:	Output parameters of xp_target_extra_specular_reflection.....	326
Table 292:	Error messages of xp_target_extra_specular_reflection.....	328
Table 293:	Runtime performances of xp_target_extra_specular_reflection .....	328
Table 294:	Input parameters of xp_target_close function.....	330
Table 295:	Output parameters of xp_target_close .....	330
Table 296:	Error messages of xp_target_close function .....	330
Table 297:	Runtime performances of xp_target_close .....	330
Table 298:	Input parameters of xp_target_get_id_data function .....	331
Table 299:	Output parameters of xp_target_get_id_data function .....	331
Table 300:	Runtime performances of xp_target_get_id_data function.....	332
Table 301:	Input parameters for xp_converter.....	334
Table 302:	iray input vs corrective function. ....	335
Table 303:	Known problems.....	338

## List of Figures

Figure1:	Attitude Initialisation Overview	32
Figure2:	Satellite Nominal Initialisation	33
Figure3:	Satellite Initialisation	33
Figure4:	Instrument Initialisation	33
Figure5:	Geolocation Routines Calling Sequence	34

## 1 SCOPE

The EXPLORER\_POINTING Software User Manual provides a detailed description of usage of the CFI functions included within the EXPLORER\_POINTING CFI software library.

---

## 2 ACRONYMS AND NOMENCLATURE

### 2.1 Acronyms

ANX	Ascending Node Crossing
AOCS	Attitude and Orbit Control Subsystem
ASCII	American Standard Code for Information Interchange
CFI	Customer Furnished Item
CS	Coordinate System
DRS	Data Relay Satellite
ESA	European Space Agency
ESTEC	European Space Technology and Research Centre
GPL	GNU Public Library
GPS	Global Positioning System
GS	Ground Station
H/W	Hardware
IERS	International Earth Rotation Service
I/F	Interface
LOS	Line Of Sight
LUT	Look-Up Table
OBT	On-board Binary Time
OSF	Orbit Scenario File
RAM	Random Access Memory
SBT	Satellite Binary Time
SRAR	Satellite Relative Actual Reference
SSP	Sub Satellite Point
SUM	Software User Manual
S/W	Software
TAI	International Atomic Time
UTC	Coordinated Universal Time
UT1	Universal Time UT1
WGS[84]	World Geodetic System 1984

## 2.2 Nomenclature

<i>CFI</i>	A group of CFI functions, and related software and documentation. that will be distributed by ESA to the users as an independent unit
<i>CFI function</i>	A single function within a CFI that can be called by the user
<i>Library</i>	A software library containing all the CFI functions included within a CFI plus the supporting functions used by those CFI functions (transparently to the user)

---

## 3 APPLICABLE AND REFERENCE DOCUMENTS

### 3.1 Applicable Documents

[GEN\_SUM] Earth Explorer Mission CFI Software. General Software User Manual. CS-MA-DMS-GS-0002. Issue 3.4. 18/11/05

### 3.2 Reference Documents

[MCD] Earth Explorer Mission CFI Software. Mission Conventions Document. CS-MA-DMS-GS-0001. Issue 1.3 15/07/03.

[F\_H\_SUM] Earth Explorer Mission CFI Software. EXPLORER\_FILE\_HANDLING Software User Manual. CS-MA-DMS-GS-0008. Issue 3.4. 18/11/05.

[DAT\_SUM] Earth Explorer Mission CFI Software. EXPLORER\_DATA\_HANDLING Software User Manual. CS-MA-DMS-GS-0009. Issue 3.4. 18/11/05.

[LIB\_SUM] Earth Explorer Mission CFI Software. EXPLORER\_LIB Software User Manual. CS-MA-DMS-GS-0003. Issue 3.4. 18/11/05.

[LOS\_ALG] LOS Intersection. PE-TN-ESA-SY-0043

## 4 INTRODUCTION

### 4.1 Functions Overview

This software library contains the CFI functions required to perform accurate computation of pointing parameters from and to a satellite for various types of targets.

It includes a set of functions to initialize the attitude of the platform and the instruments. The values provided by these functions are later used by all the other functions of the library.

A detailed description of each function is provided in Section 7.

Please refer also to:

[MCD] for a detailed description of the time references and formats, coordinate systems, parameters and models used in this document

[GEN\_SUM] for a complete overview of the CFI, and in particular the detailed description of the *Id* concept and usage and the error handling functions

### 4.1.1 Attitude Data Flow

The following figure shows the typical data flow for the attitude functions. First, the different transformations between the various reference frames are initialised. Then, given the spacecraft position, the attitude is calculated:

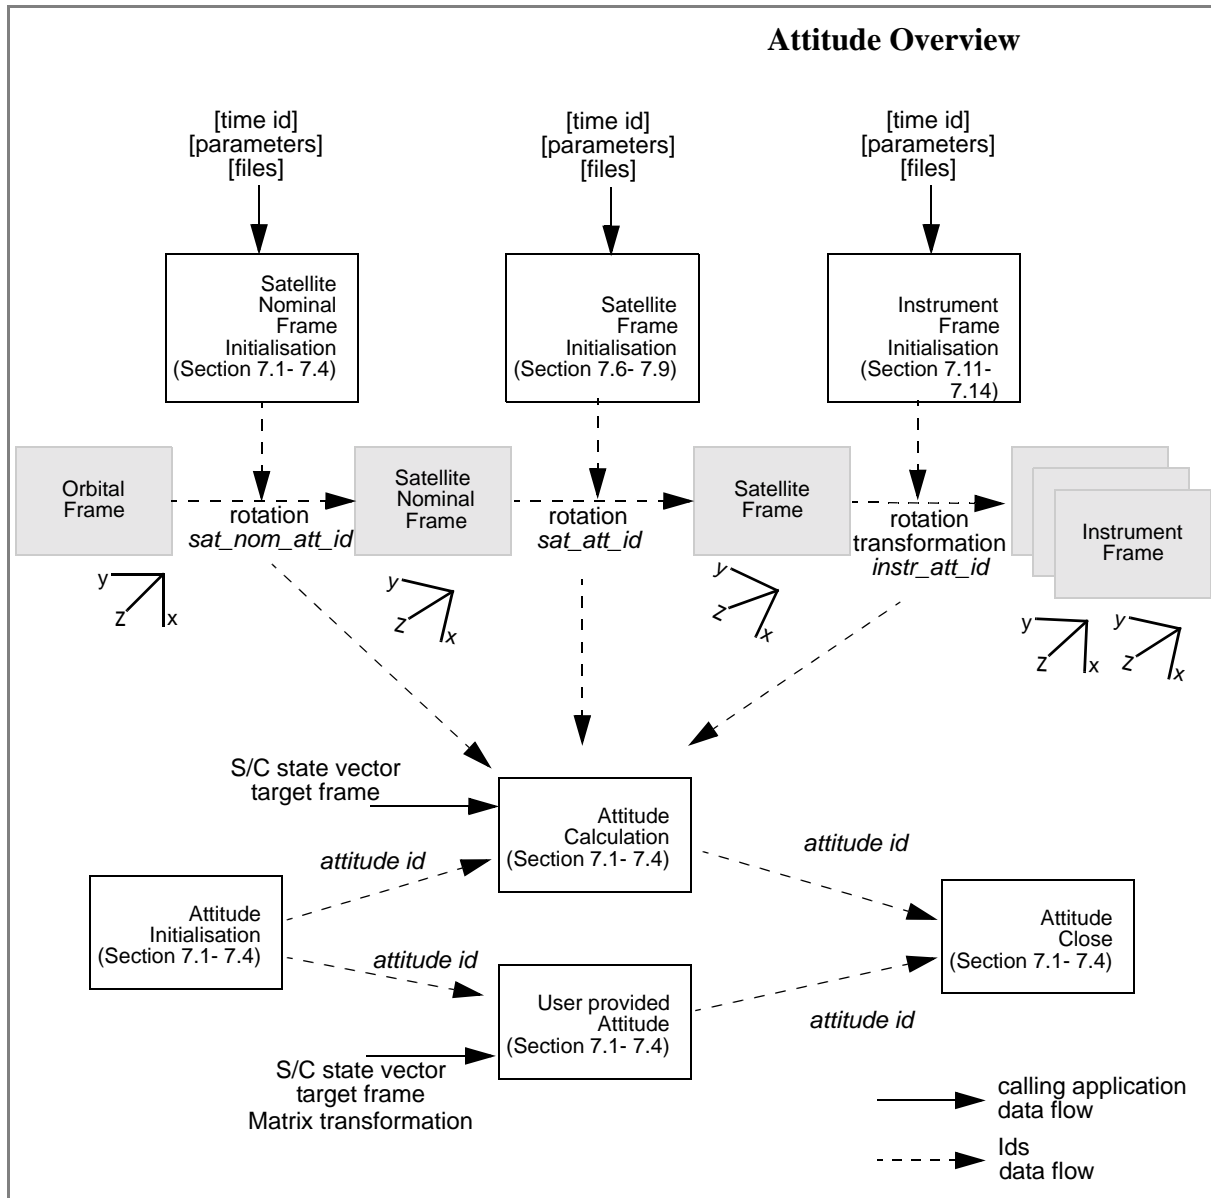


Figure 1: Attitude Initialisation Overview



Each different transformation can be initialised with different models:

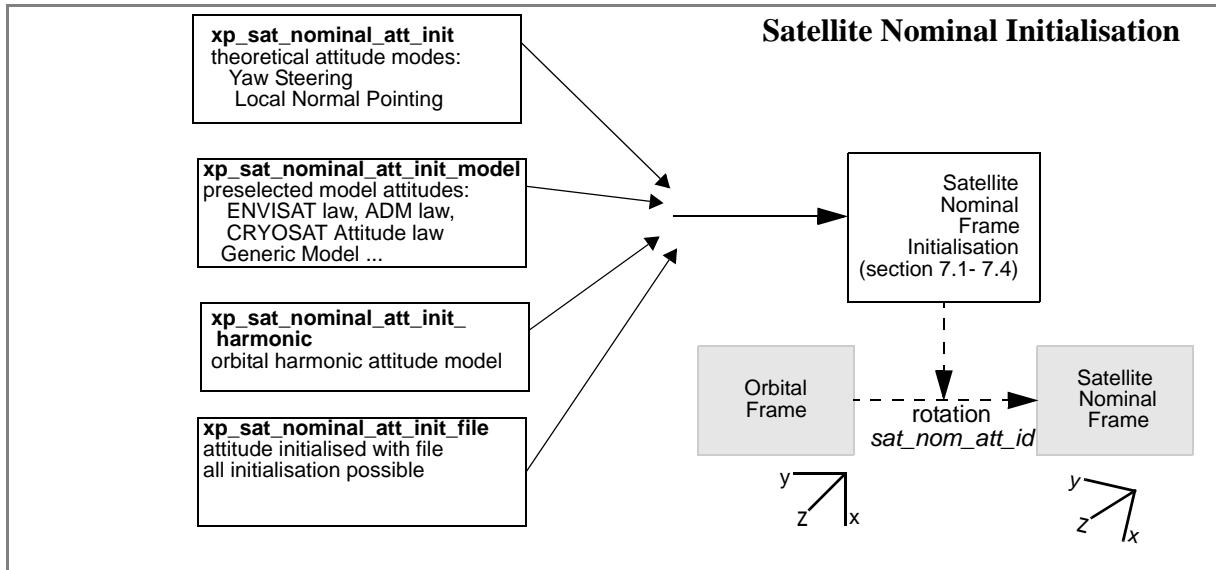


Figure 2: Satellite Nominal Initialisation

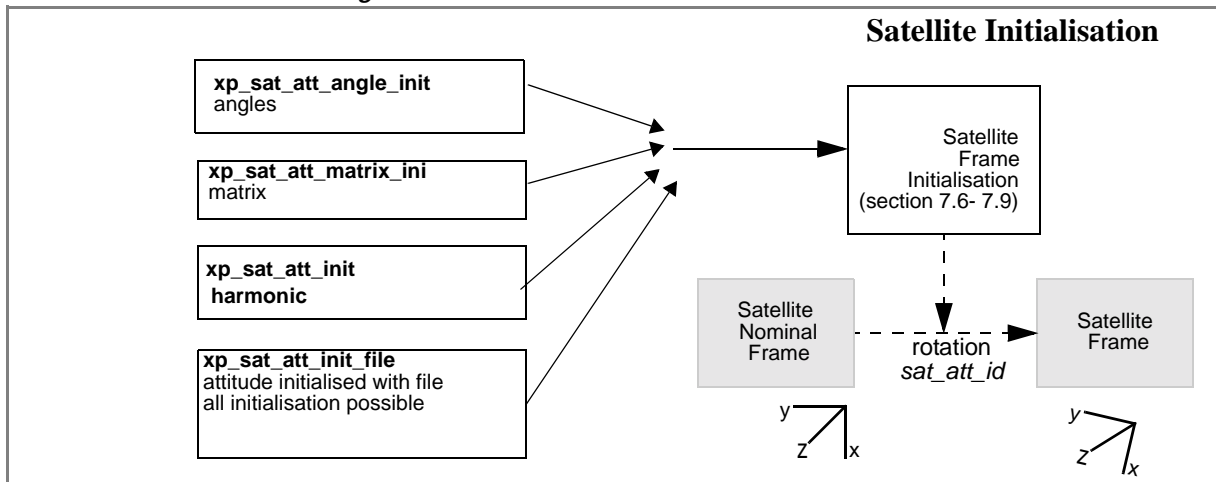


Figure 3: Satellite Initialisation

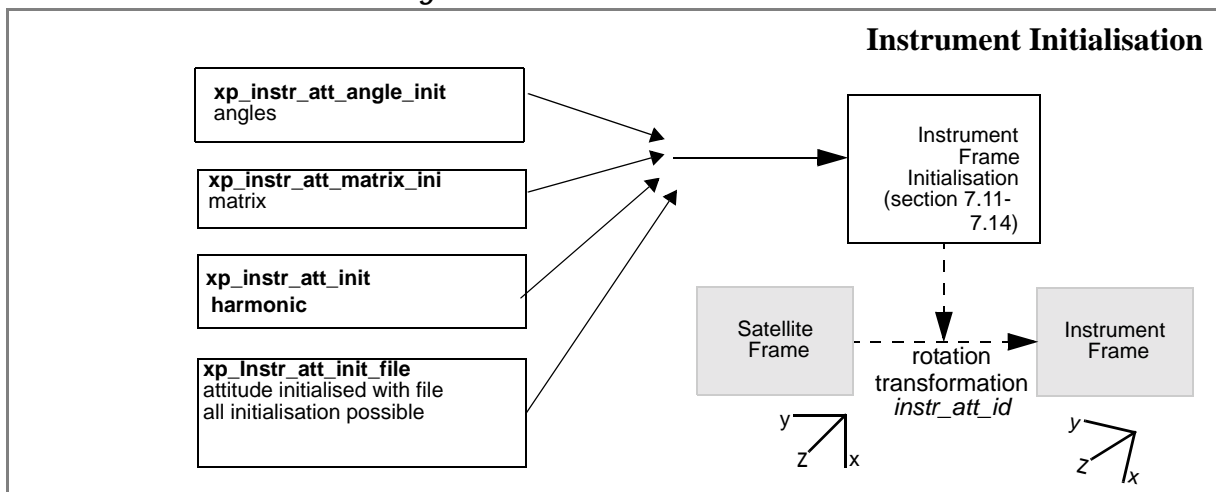


Figure 4: Instrument Initialisation

### 4.1.2 Geolocation Routines Data Flow

The following figure shows the typical data flow for the geolocation routines functions. First, the attitude should be calculated, and, if needed, the refraction and Digital Elevation Models initialised.







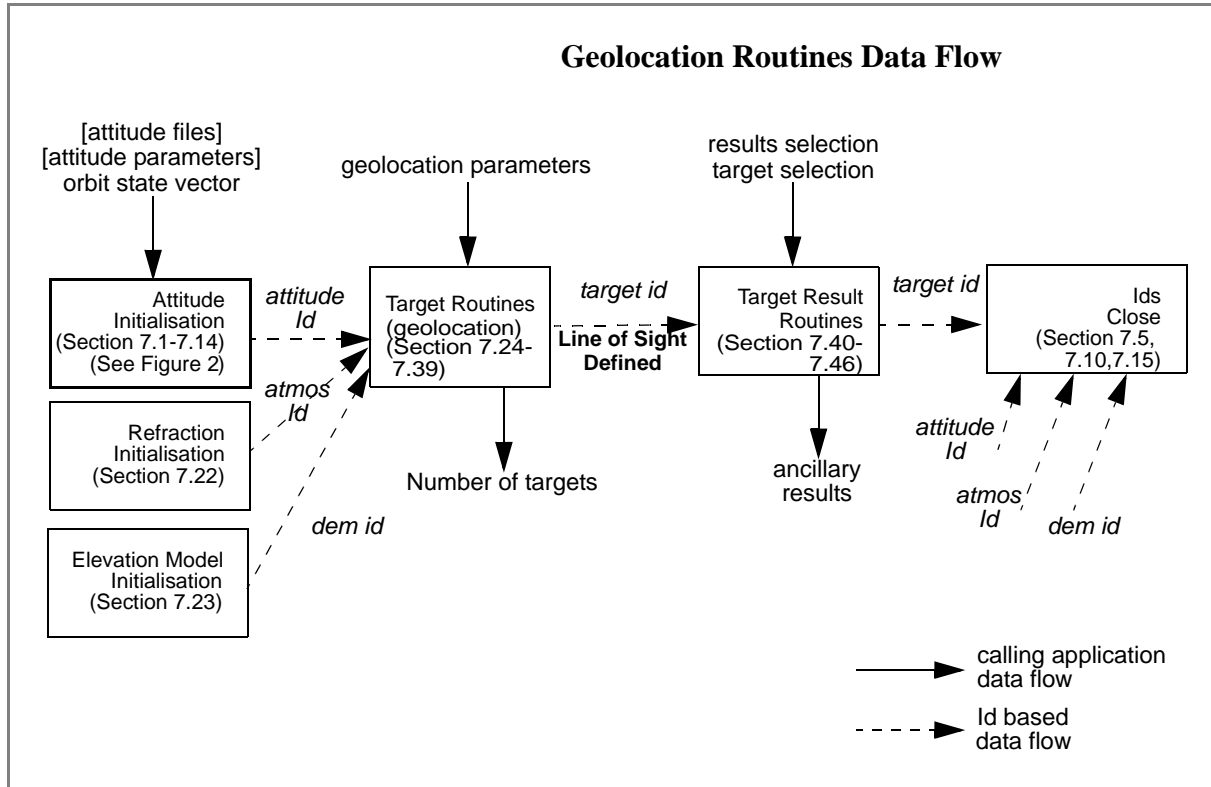








Figure 5: Geolocation Routines Calling Sequence




The table below and the diagrams on the next pages describe the various **xp\_target\_<function>**.

<b>xp_target_&lt;function&gt;</b>	<b>Description</b>
xp_(multi)_target_inter	It calculates the intersection point(s) of the line of sight defined by an elevation and an azimuth angle expressed in the input Attitude frame, with a surface(s) located at a certain geodetic altitude(s) over the Earth.
xp_(multi)_target_travel_time	It calculates the point of the line or sight from the satellite (defined by an elevation and an azimuth angle expressed in the selected Attitude Frame) at a given travel time(s) along the (curved) line of sight.
xp_target_ground_range	It calculates the location of a point that is placed on a surface at a certain geodetic altitude over the Earth, that lays on the plane defined by the S/C position, the nadir and a reference point, and that is at a certain distance or ground range measured along that surface from that reference point.  This reference point is calculated being the intersection of the previous surface with the line of sight defined by an elevation and azimuth angle in the input Attitude coordinate system.
xp_target_incidence_angle	It calculates the location of a point that is placed on a surface at a certain geodetic altitude over the Earth and that is seen from the S/C on a line of sight that forms a certain azimuth angle in the input Attitude frame and that intersects that surface with a certain incidence angle.
xp_target_range	It calculates the location of a point that is placed on a surface at a certain geodetic altitude over the Earth, that is seen from the S/C on a line of sight that forms a certain azimuth angle in the input Attitude frame, and that is at a certain range or slant-range from the S/C.
xp_target_range_rate	It calculates the location of a point that is placed on a surface at a certain geodetic altitude over the Earth, that is at a certain range from S/C, and whose associated Earth-fixed target has a certain range-rate value.
xp_target_tangent	It calculates the location of the tangent point over the Earth that is located on the line of sight defined by an elevation and azimuth angles expressed in the input Attitude frame.
xp_target_altitude	It calculates the location of the tangent point over the Earth that is located on a surface at a certain geodetic altitude over the Earth and that is on a line of sight that forms a certain azimuth angle in the input Attitude frame.
xp_target_star	It calculates the location of the tangent point over the Earth that is located on the line of sight that points to a star defined by its right ascension and declination coordinates.
xp_target_generic	The cartesian state vector of the target is taken as an input.
xp_target_tangent_sun	It calculates the location of the tangent point over the Earth that is located on the line of sight that points to the Sun
xp_target_tangent_moon	It calculates the location of the tangent point over the Earth that is located on the line of sight that points to the Moon
xp_target_station	It calculates the most relevant observation parameters of the link between the satellite and a ground station
xp_target_drs	It calculates the most relevant observation parameters of the link between the satellite and a Data Relay Satellite (DRS).

*Table 1: xp\_target functions.*

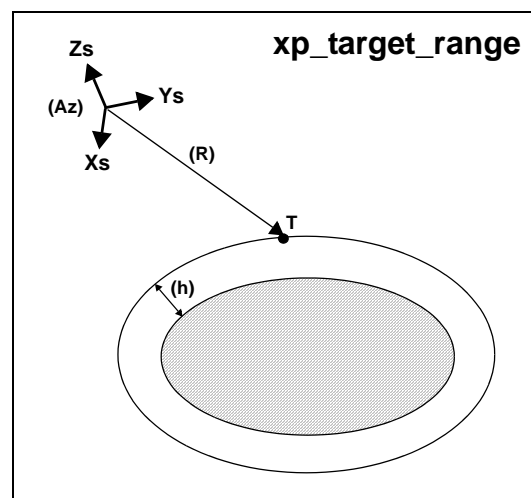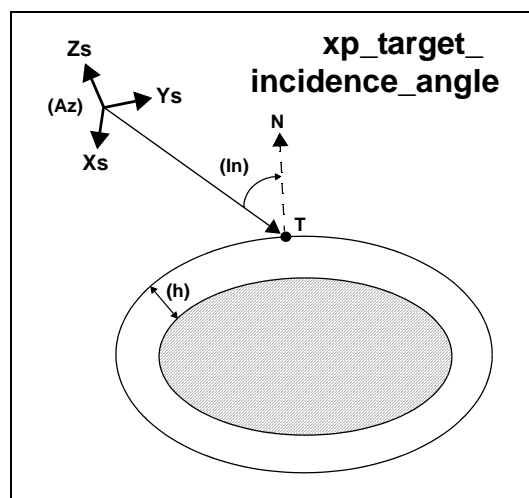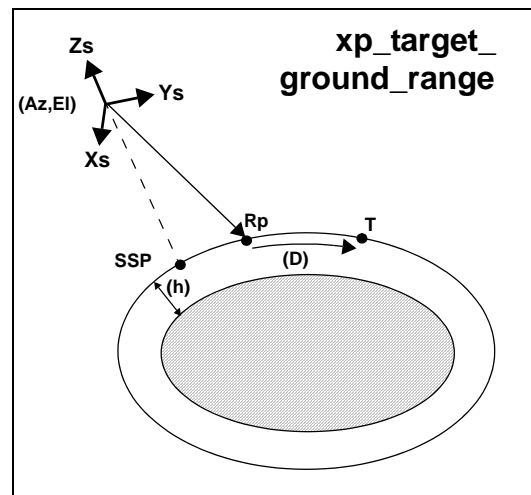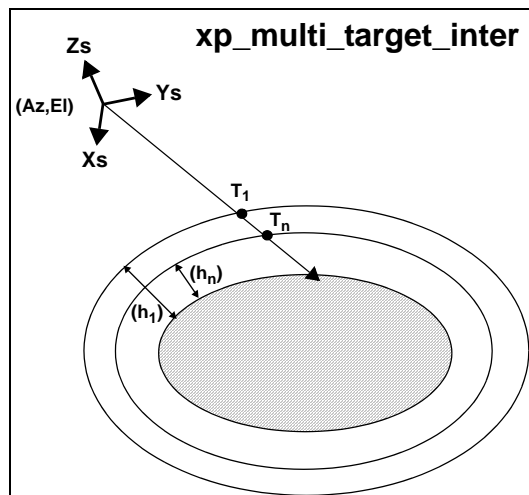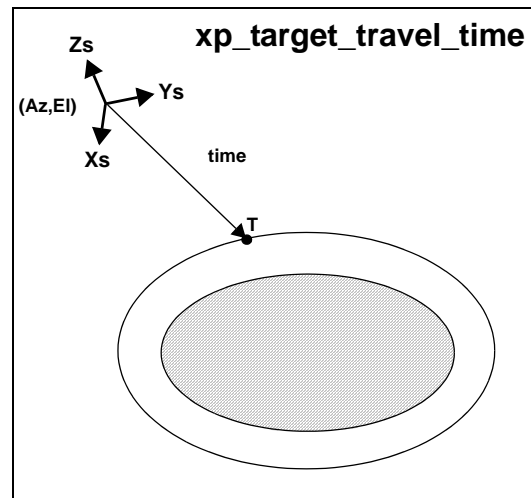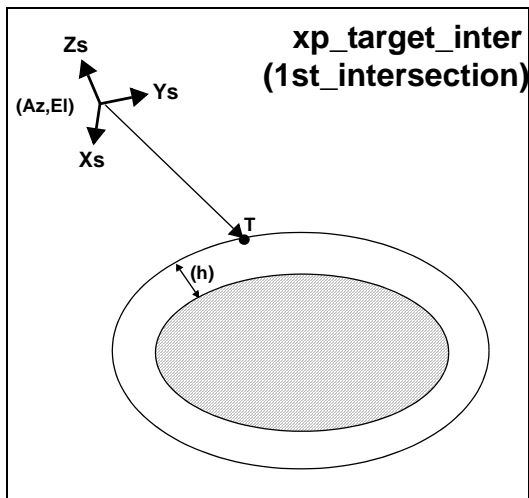

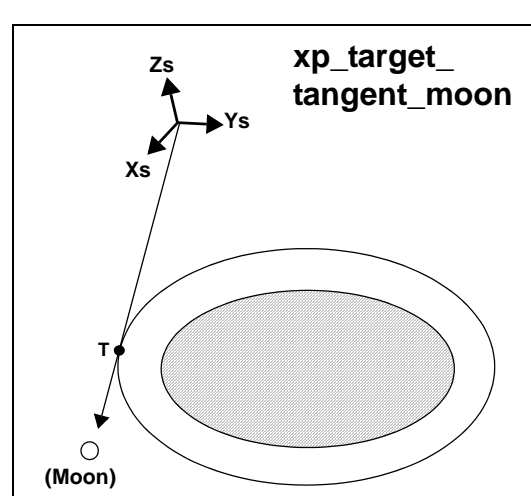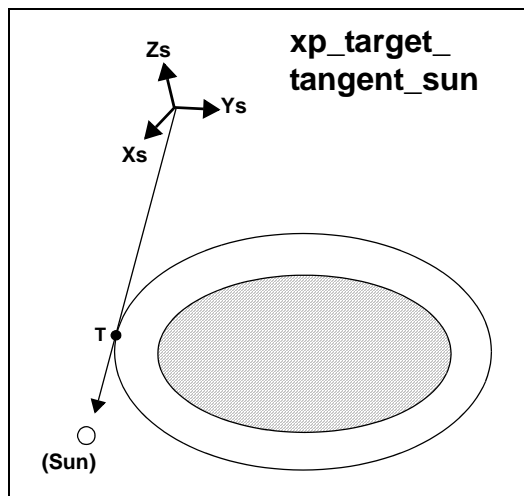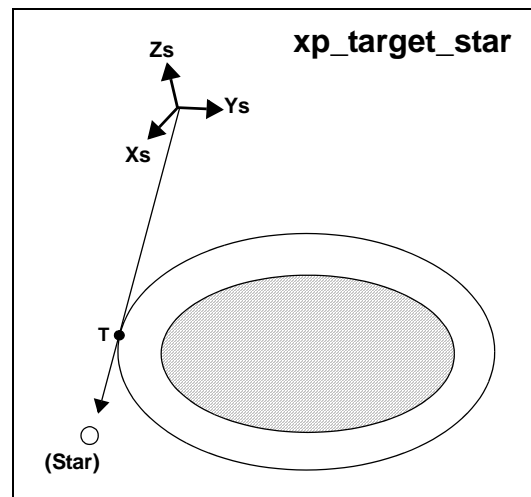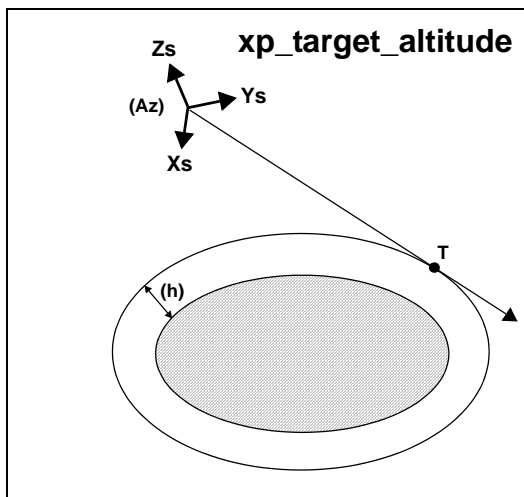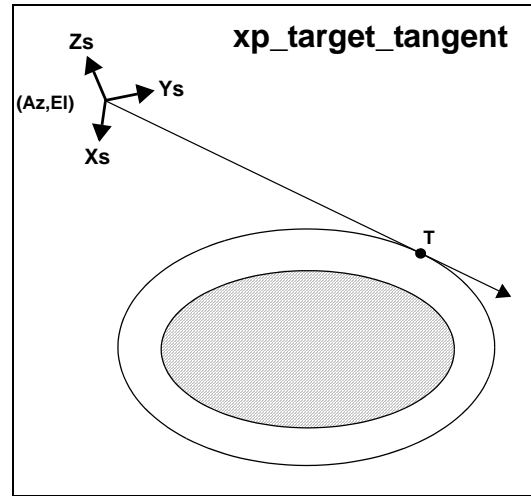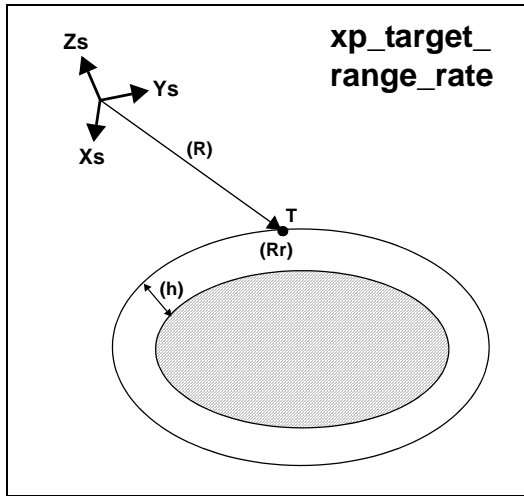

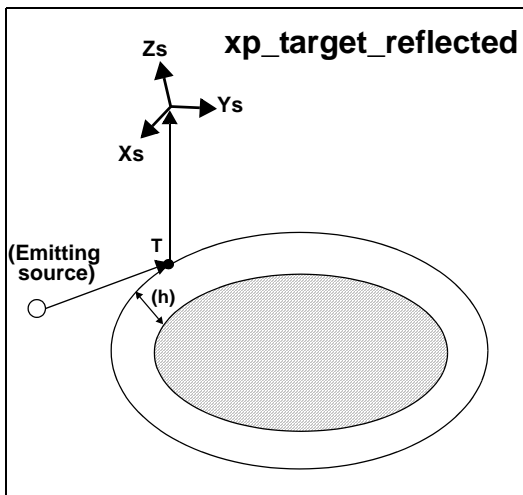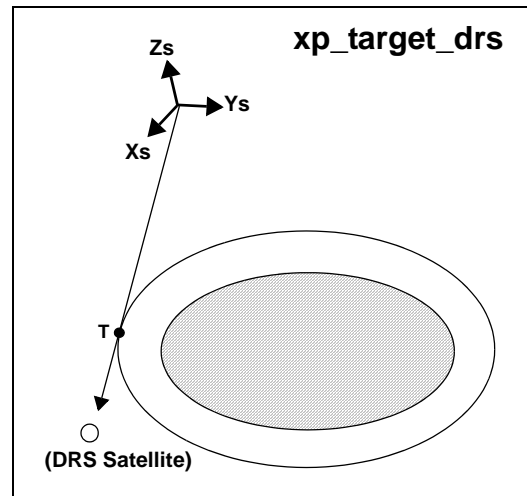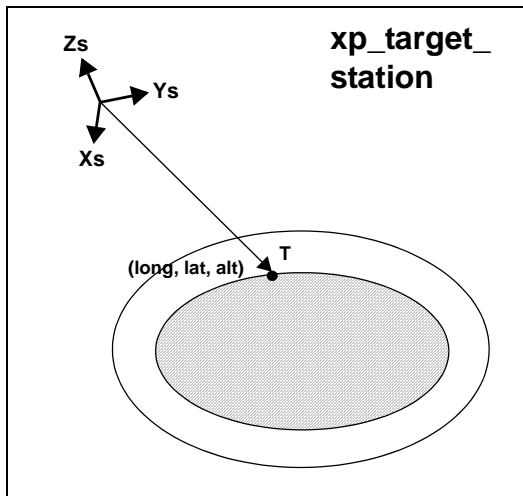

[Xs,Ys,Zs] = Attitude Frame

() = Input data to the mode

(Az,EI) = Azimuth + Elevation of the LOS

(h) = Geodetic altitude of the target

(R) = Range Satellite  $\leftrightarrow$  Reference Point/Target

(D) = Distance or Ground range Ref. Point  $\leftrightarrow$  Target

(In) = Incidence angle of the LOS

(Rr) = Range-rate of the Earth-fixed target

T = Target

SSP = Sub Satellite Point = Nadir of the satellite

Rp = Reference Point

N = Normal vector to the surface at a geodetic altitude = h

As it can be seen from the list of functions, there are some functions that calculate several targets (xp\_multi\_target\_xxxx). The number of targets found by the functions is returned through the interface.

In addition to these “user” targets, two other categories of targets can be defined, “LOS” targets and “DEM” targets.

#### 4.1.2.1 LOS targets

The idea is to get information about all the ray path points computed by a specific target routine along the Line of Sight (LOS) trajectory.

For every target routine, the output parameter num\_los\_target will return the number of points in the path. It applies when the variable "target\_type" is equal to XP\_LOS\_TARGET\_TYPE.

1. Start point of LOS

The spacecraft position (Instrument CS) shall be considered as the start point for the LOS path.

2. Stop point of LOS

The stop point for the LOS path will be different depending on the selected target function; nominally it will be the resulting target point.

- xp\_target\_inter and xp\_multi\_target\_inter: 1st or 2nd intersection point (Point corresponding to the last altitude for the multi\_target routine)
- xp\_target\_ground\_range: Target point
- xp\_target\_incidence\_angle: Target point
- xp\_target\_range: Target point
- xp\_target\_range\_rate: Target point
- p\_target\_tangent: Two different cases to consider depending on whether refraction is selected or not:
  - No refraction mode: Tangent point
  - Refraction mode:
    - The 2nd intersection point with a surface located at Refraction Model Maximum Height (geodetic altitude) over the Earth if tangent height  $\leq$  Refraction Model Maximum Height
    - The tangent point if tangent height  $>$  Refraction Model Maximum Height
- xp\_target\_altitude: Point at selected altitude
- xp\_target\_star: Two different cases to consider depending on whether refraction is selected or not:
  - No refraction mode: Tangent point
  - Refraction mode:
    - The 2nd intersection point with a surface located at Refraction Model Maximum Height (geodetic altitude) over the Earth if tangent height  $\leq$  Refraction Model Maximum Height
    - The tangent point if tangent height  $>$  Refraction Model Maximum Height
- xp\_target\_station: Ground Station position
- xp\_target\_drs: DRS position
- xp\_target\_generic: Target position
- xp\_target\_reflected: Reflection point
- xp\_target\_travel\_time and xp\_multi\_target\_travel\_time: Point at selected travel time (Point corresponding to the last travel time for the multi\_target routine)
- xp\_target\_tangent\_sun: Tangent point
- xp\_target\_tangent\_moon: Tangent point

#### 4.1.2.2 DEM targets

A DEM Target is defined as the intersection of a line of sight with the Earth Surface defined using a digital elevation model (DEM).

A DEM Target is calculated using as line of sight the LOS targets that has been computed previously with a target routine (Note that such LOS consist in a polygonal line, no necessarily a straight line). Consequently, to get a DEM target it is necessary to follow these steps:

- Initialize the DEM model using the xp\_dem\_init routine and a configuration file (Section 7.52).
- One call to the target routine for getting the LOS targets.
- One call to the target extra routine requesting the DEM target.

The digital elevation model of the Earth consists in a set of points defining a grid for which a measure of the altitude over the Earth reference ellipsoid is given. The altitude of the points within each cell of the grid is computed by the CFI using a bilinear interpolation with the points of the corner of the cell. Details about the bilinear algorithm used to compute the intersection can be seen in [LOS\_ALG].

## 5 LIBRARY INSTALLATION

For a detailed description of the installation of any CFI library, please refer to [GEN\_SUM].



## 6 LIBRARY USAGE

Note that to use the EXPLORER\_POINTING software library, the following other CFI software libraries are required:

- EXPLORER\_FILE\_HANDLING (See [F\_H\_SUM]).
- EXPLORER\_DATA\_HANDLING
- EXPLORER\_LIB (See [LIB\_SUM]).

It is also needed to have properly installed in the system the following external GPL library:

- LIBXML2 (See [GEN\_SUM]).

To use the EXPLORER\_POINTING software library in a user application, that application must include in its source code either:

- `explorer_pointing.h` (for a C application)
- `explorer_pointing.inc` (for a ForTran application under SOLARIS)
- `explorer_pointing_win.inc` (for a ForTran application under Windows 9X/NT/2000)

To link correctly this application, the user must include in his linking command flags like (assuming `cfi_lib_dir` and `cfi_include_dir` are the directories where respectively all CFI libraries and include files have been installed, see [GEN\_SUM] for installation procedures):

- SOLARIS/LINUX:

```
-Icfi_include_dir -Lcfi_lib_dir -lexplorer_pointing
                        -lexplorer_lib
                        -lexplorer_data_handling
                        -lexplorer_file_handling
                        -lxml2
```

- WINDOWS:

```
/I "cfi_include_dir" /libpath:"cfi_lib_dir"
                        libexplorer_pointing.lib
                        libexplorer_lib.lib
                        libexplorer_data_handling.lib
                        libexplorer_file_handling.lib
                        libxml2.lib
```

- MacOS:

```
-Icfi_include_dir -Lcfi_lib_dir -lexplorer_pointing
                        -lexplorer_lib
                        -lexplorer_data_handling
                        -lexplorer_file_handling
                        -framework libxml
                        -framework libiconv
```

All functions described in this document have a name starting with the prefix `xp_`

To avoid problems in linking a user application with the EXPLORER\_POINTING software library due to the existence of names multiple defined, the user application should avoid naming any global software item beginning with either the prefix XP\_ or xp\_.

It is possible to call the following CFI functions from a user application.

**Table 2: CFI functions included within EXPLORER\_POINTING library (TO BE UPDATED)**

Function Name	Enumeration value	Long
Main CFI Functions		
xp_sat_nominal_att_init	XP_SAT_NOMINAL_ATT_INIT_ID	0
xp_sat_nominal_att_init_model	XP_SAT_NOMINAL_ATT_INIT_MODEL_ID	1
xp_sat_nominal_att_init_harmonic	XP_SAT_NOMINAL_ATT_INIT_HARMONIC_ID	2
xp_sat_nominal_att_init_file	XP_SAT_NOMINAL_ATT_INIT_FILE_ID	3
xp_sat_nominal_att_close	XP_SAT_NOMINAL_ATT_CLOSE_ID	4
xp_sat_att_angle_init	XP_SAT_ATT_ANGLE_INIT_ID	5
xp_sat_att_matrix_init	XP_SAT_ATT_MATRIX_INIT_ID	6
xp_sat_att_init_harmonic	XP_SAT_ATT_INIT_HARMONIC_ID	7
xp_sat_att_init_file	XP_SAT_ATT_INIT_FILE_ID	8
xp_sat_att_close	XP_SAT_ATT_CLOSE_ID	9
xp_instr_att_angle_init	XP_INSTR_ATT_ANGLE_INIT_ID	10
xp_instr_att_matrix_init	XP_INSTR_ATT_MATRIX_INIT_ID	11
xp_instr_att_init_harmonic	XP_INSTR_ATT_INIT_HARMONIC_ID	12
xp_instr_att_init_file	XP_INSTR_ATT_INIT_FILE_ID	13
xp_instr_att_close	XP_INSTR_ATT_CLOSE_ID	14
xp_change_frame	XP_CHANGE_FRAME_ID	15
xp_attitude_init	XP_ATTITUDE_INIT_ID	16
xp_attitude_compute	XP_ATTITUDE_COMPUTE_ID	17
xp_attitude_user_set	XP_ATTITUDE_USER_SET_ID	18
xp_attitude_close	XP_ATTITUDE_CLOSE_ID	19
xp_atmos_init	XP_ATMOS_INIT_ID	20
xp_atmos_close	XP_ATMOS_CLOSE_ID	21
xp_dem_init	XP_DEM_INIT_ID	22
xp_dem_compute	XP_DEM_COMPUTE	23
xp_dem_close	XP_DEM_CLOSE_ID	24
xp_target_inter	XP_TARGET_INTER_ID	25

Function Name	Enumeration value	Long
xp_target_travel_time	XP_TARGET_TRAVEL_TIME_ID	26
xp_target_ground_range	XP_TARGET_GROUND_RANGE_ID	27
xp_target_incidence_angle	XP_TARGET_INCIDENCE_ANGLE_ID	28
xp_target_range	XP_TARGET_RANGE_ID	29
xp_target_range_rate	XP_TARGET_RANGE_RATE_ID	30
xp_target_tangent	XP_TARGET_TANGENT_ID	31
xp_target_altitude	XP_TARGET_ALTITUDE_ID	32
xp_target_star	XP_TARGET_STAR_ID	33
xp_target_station	XP_TARGET_STATION_ID	34
xp_target_drs	XP_TARGET_DRS_ID	35
xp_target_generic	XP_TARGET_GENERIC_ID	36
xp_target_reflected	XP_TARGET_REFLECTED_ID	37
xp_multi_target_inter	XP_MULTI_TARGET_INTER_ID	38
xp_multi_target_travel_time	XP_MULTI_TARGET_TRAVEL_TIME_ID	39
xp_target_extra_vector	XP_TARGET_EXTRA_VECTOR_ID	40
xp_target_extra_main	XP_TARGET_EXTRA_MAIN_ID	41
xp_target_extra_aux	XP_TARGET_EXTRA_AUX_ID	42
xp_target_extra_ef_target	XP_TARGET_EXTRA_EF_TARGET_ID	43
xp_target_extra_target_to_sun	XP_TARGET_EXTRA_TARGET_TO_SUN_ID	44
xp_target_extra_target_to_moon	XP_TARGET_EXTRA_TARGET_TO_MOON_ID	45
xp_target_extra_specular_reflection	XP_TARGET_EXTRA_SPECULAR_REFLECTION_ID	46
xp_target_tangent_sun	XP_TARGET_TANGENT_SUN_ID	47
xp_target_tangent_moon	XP_TARGET_TANGENT_MOON_ID	48
xp_target_close	XP_TARGET_CLOSE_ID	49
xp_run_init	XP_RUN_INIT_ID	50

Function Name	Enumeration value	Long
Error Handling Functions		
xp_verbose	not applicable	
xp_silent		
xp_get_code		
xp_get_msg		
xp_print_msg		

Notes about the table:

- To transform the extended status flag returned by a CFI function to either a list of error codes or list of error messages, the enumeration value (or the corresponding long value) described in the table must be used
- The error handling functions have no enumerated values

Whenever available **it is strongly recommended to use enumeration values rather than integer values.**

## 6.1 Usage hints

The runtime performances of some of the CFI functions are improved to a large extent if they are called two consecutive times keeping constant some of their inputs.

Nevertheless, although the user may not need to call the CFI functions two consecutive times with the same inputs, there are internal functions that are actually called in those conditions, and thus improving the runtime performances of the former.

Thus, the runtime improvement is achieved with any sequence of calls to those CFI functions, not only with a sequence of calls to the same function.

In fact, the time, position, velocity, acceleration vectors, AOCS and mispointing angles do not need to keep exactly constant as long as the difference between two consecutive calls lays within the following thresholds:

- Time: 0.0864 microsec
- Position vector: 0.6e-3 m
- Velocity vector: 0.6e-6 m/s
- Acceleration vector: 0.6e-9 m/s<sup>2</sup>
- AOCS: 5e-9 deg
- Mispointing angles: 5e-9 deg
- Mispointing angles-rate: 5e-12 deg
- Mispointing angles-rate-rate: 5e-15 deg

Every CFI function has a different length of the Error Vector, used in the calling I/F examples of this SUM and defined at the beginning of the library header file. In order to provide the user with a single value that could be used as Error Vector length for every function, a generic value has been defined (XP\_ERR\_VECTOR\_MAX\_LENGTH) as the maximum of all the Error Vector lengths. This value can therefore be safely used for every call of functions of this library.

## 6.2 General Enumerations

The aim of the current section is to present the enumeration values that can be used rather than integer parameters for some of the input parameters of the EXPLORER\_POINTING routines, as shown in the table below. The enumerations presented in [GEN\_SUM], [F\_H\_SUM] and [LIB\_SUM] are also applicable.

*Table 3: Enumerations within EXPLORER\_POINTING library*

Input	Description	Enumeration value	Long
Time Initialization Mode	Initialization from file (data-driven)	XP_SEL_FILE	0
	Initialization within a time range	XP_SEL_TIME	1
	Initialization within a range of orbits	XP_SEL_ORBIT	2
	(not used in POINTING)	XP_SEL_DEFAULT	3
Atmosphere Initialization Mode	User's refraction ray tracing model	XP_USER_INIT	1
	User's predefined refraction LUTs	XP_LUT_INIT	2
	Complex atmospheric model	XP_COMPLEX_INIT	3
Earth Intersection Mode	No intersection with Earth geoid	XP_NO_INTER	0
	First intersection with Earth geoid	XP_INTER_1ST	1
	Second intersection with Earth geoid	XP_INTER_2ND	2
AOCS mode	Geocentric pointing	XP_AOCS_GPM	0
	Local normal pointing	XP_AOCS_LNP	1
	Yaw steering + local normal pointing	XP_AOCS_YSM	2
Satellite Nominal Attitude Model	Generic model	XP_MODEL_GENERIC	0
	Envisat model	XP_MODEL_ENVISAT	1
	Cryosat model	XP_MODEL_CRYOSAT	2
	ADM model	XP_MODEL_ADM	3
Axis enumeration	X axis	XP_X_AXIS	0
	-X axis	XP_NEG_X_AXIS	1
	Y axis	XP_Y_AXIS	2
	-Y axis	XP_NEG_Y_AXIS	3
	Z axis	XP_Z_AXIS	4
	-Z axis	XP_NEG_Z_AXIS	5

*Table 3: Enumerations within EXPLORER\_POINTING library*

Input	Description	Enumeration value	Long
Axis target	Sun pointing	XP_SUN_VEC	0
	Moon pointing	XP_MOON_VEC	1
	Earth pointing	XP_EARTH_VEC	2
	Nadir pointing	XP_NADIR_VEC	3
	Inertial velocity pointing	XP_INERTIAL_VEL_VEC	4
	Earth Fixed velocity pointing	XP_EF_VEL_VEC	5
	Inertial target pointing	XP_INERTIAL_TARGET_VEC	6
	Spacecraft Earth Fixed velocity	XP_EF_TARGET_VEC	7
	Earth Fixed target pointing	XP_SC_EF_VEL_VEC	8
	Orbit Pole	XP_ORBIT_POLE	9
Mode Flag	Flag for location calculus	XP_MODE_FLAG_LOCATION	0
	Flag for direction calculus	XP_MODE_FLAG_DIRECTION	1
Frame Flag	Selection of coordinate frame	XP_FRAME_FLAG_EXT	0
	Selection of attitude frame	XP_FRAME_FLAG_SAT	1
Angle Type	True Latitude (TOD)	XP_ANGLE_TYPE_TRUE_LAT_TO D	1
	Mean Latitude (TOD)	XP_ANGLE_TYPE_MEAN_LAT_TO D	2
Attitude Frame ID	Satellite Orbital Reference Frame	XP_SAT_ORBITAL_REF	0
	Satellite Nominal Attitude Frame	XP_SAT_NOMINAL_ATT	1
	Satellite Attitude Frame	XP_SAT_ATT	2
	Instrument(s) Attitude Frame(s)	XP_INSTR_ATT	3
Target Type	User Target	XP_USER_TARGET_TYPE	0
	Line of Sight Target	XP_LOS_TARGET_TYPE	1
	DEM Target	XP_DEM_TARGET_TYPE	2
Source Type	Star	XP_SOURCE_STAR	0
	Sun	XP_SOURCE_SUN	1
	Moon	XP_SOURCE_MOON	2
	Generic source	XP_SOURCE_GENERIC	3

*Table 3: Enumerations within EXPLORER\_POINTING library*

Input	Description	Enumeration value	Long
Ray tracing model		XP_NO_REF	0
		XP_STD_REF	1
		XP_USER_REF	2
		XP_PRED_REF	3
		XP_STD_REF_N	10
		XP_USER_REF_N	20
		XP_PRED_REF_N	30
		XP_US76_REF	300
		XP_TROPIC_REF	301
		XP_MID_SUM_REF	302
		XP_MID_WIN_REF	303
		XP_SUBAR_SUM_REF	304
		XP_SUBAR_WIN_REF	305
		XP_LUT_REF	400
		XP_US76_REF_N	3000
		XP_TROPIC_REF_N	3001
		XP_MID_SUM_REF_N	3002
		XP_MID_WIN_REF_N	3003
	XP_SUBAR_SUM_REF_N	3004	
	XP_SUBAR_WIN_REF_N	3005	
	XP_LUT_REF_N	4000	
DEM mode	ACE Model	XP_DEM_ACE_MODEL	0
Attitude file type	Attitude generic file containing a list for angles or quaternions	XP_ATTITUDE_GENERIC_FILE_MODEL	0
	CryoSat Star Tracker File	XP_ATTITUDE_STAR_TRACKER_FILE_MODEL	1

*Table 3: Enumerations within EXPLORER\_POINTING library*

Input	Description	Enumeration value	Long
Target extra main results choice	Geocentric longitude and latitude. Geodetic altitude and latitude.	XP_TARG_EXTRA_MAIN_GEO	1
	Geocentric longitude and latitude rates. Geodetic altitude and latitude rates.	XP_TARG_EXTRA_MAIN_GEO_D	2
	Geocentric longitude and latitude rate rates. Geodetic altitude and latitude rate rates.	XP_TARG_EXTRA_MAIN_GEO_2D	4
	Target to satellite azimuth and elevation (Topocentric CS)	XP_TARG_EXTRA_MAIN_TARG2SAT_TOP	8
	Target to satellite azimuth and elevation rates (Topocentric CS)	XP_TARG_EXTRA_MAIN_TARG2SAT_TOP_D	16
	Target to satellite azimuth and elevation rate rates (Topocentric CS)	XP_TARG_EXTRA_MAIN_TARG2SAT_TOP_2D	32
	Satellite to target azimuth and elevation (Topocentric CS)	XP_TARG_EXTRA_MAIN_SAT2TARGET_TOP	64
	Satellite to target azimuth and elevation rates (Topocentric CS)	XP_TARG_EXTRA_MAIN_SAT2TARGET_TOP_D	128
	Satellite to target azimuth and elevation rate rates (Topocentric CS)	XP_TARG_EXTRA_MAIN_SAT2TARGET_TOP_2D	256
	Satellite to target azimuth and elevation (Attitude Frame)	XP_TARG_EXTRA_MAIN_SAT2TARGET_ATTITUDE	512
	Satellite to target azimuth and elevation rates (Attitude Frame)	XP_TARG_EXTRA_MAIN_SAT2TARGET_ATTITUDE_D	1024
	Satellite to target azimuth and elevation rate rates (Attitude Frame)	XP_TARG_EXTRA_MAIN_SAT2TARGET_ATTITUDE_2D	2048
	All parameters	XP_TARG_EXTRA_MAIN_ALL	4095



*Table 3: Enumerations within EXPLORER\_POINTING library*

Input	Description	Enumeration value	Long
Target extra aux results choice	Minimum distance from the nadir of the target to the ground track.	XP_TARG_EXTRA_AUX_DIST_NAD_TARG_GT	1
	Radius of curvature in the look direction at the nadir of the target.	XP_TARG_EXTRA_AUX_RAD_CUR	2
	Minimum distance rate from the nadir of the target to the ground track.	XP_TARG_EXTRA_AUX_DIST_NAD_TARG_GT_D	4
	Minimum distance rate rate from the nadir of the target to the ground track.	XP_TARG_EXTRA_AUX_DIST_NAD_TARG_GT_2D	8
	Radius of curvature rate in the look direction at the nadir of the target.	XP_TARG_EXTRA_AUX_RAD_CUR_D	16
	Radius of curvature rate rate in the look direction at the nadir of the target.	XP_TARG_EXTRA_AUX_RAD_CUR_2D	32
	Target Nadir Velocity relative to the Earth. (Topocentric CS)	XP_TARG_EXTRA_AUX_TARGET_NADIR_VEL	64
	Mean Local Solar Time at target.	XP_TARG_EXTRA_AUX_MLST	128
	True Local Solar Time at target.	XP_TARG_EXTRA_AUX_TLST	256
	Distance from the nadir of the target to the satellite nadir (Earth fixed CS)	XP_TARG_EXTRA_AUX_DIST_NAD_TARG_SAT_NAD	512
	Distance rate from the nadir of the target to the satellite nadir (Earth fixed CS)	XP_TARG_EXTRA_AUX_DIST_NAD_TARG_SAT_NAD_D	1024
	Distance rate rate from the nadir of the target to the satellite nadir (Earth fixed CS)	XP_TARG_EXTRA_AUX_DIST_NAD_TARG_SAT_NAD_2D	2048
	R.A. and declination at which the look direction from the satellite to the target point after crossing the atmosphere.	XP_TARG_EXTRA_AUX_LOOK_DIRECTION	4096
	Distance from the SSP to the point on the ground track nearest to the nadir of the target. (Earth fixed CS)	XP_TARG_EXTRA_AUX_DIST_SSP_MIN_DIST_GT	8192
	Distance rate from the SSP to the point on the ground track nearest to the nadir of the target. (Earth fixed CS)	XP_TARG_EXTRA_AUX_DIST_SSP_MIN_DIST_GT_D	16384
	Distance rate rate from the SSP to the point on the ground track nearest to the nadir of the target. (Earth fixed CS)	XP_TARG_EXTRA_AUX_DIST_SSP_MIN_DIST_GT_2D	32768
All parameters	XP_TARG_EXTRA_AUX_ALL	65535	

*Table 3: Enumerations within EXPLORER\_POINTING library*

<b>Input</b>	<b>Description</b>	<b>Enumeration value</b>	<b>Long</b>
Satellite Nominal Attitude Mode	Satellite Nominal Attitude initialised with AOCS mode	XP_SAT_NOMINAL_ATT_INIT_MODE	0
	Satellite Nominal Attitude initialised with Model	XP_SAT_NOMINAL_ATT_INIT_MODEL_MODE	1
	Satellite Nominal Attitude initialised with Harmonics	XP_SAT_NOMINAL_ATT_INIT_HARMONIC_MODE	2
	Satellite Nominal Attitude initialised with a File	XP_SAT_NOMINAL_ATT_INIT_FILE_MODE	3
Satellite Attitude Mode	Satellite Attitude initialised with angles	XP_SAT_ATT_ANGLE_INIT_MODE	0
	Satellite Attitude initialised with matrices	XP_SAT_ATT_MATRIX_INIT_MODE	1
	Satellite Attitude initialised with Harmonics	XP_SAT_ATT_INIT_HARMONIC_MODE	2
	Satellite Attitude initialised with a File	XP_SAT_ATT_INIT_FILE_MODE	3
Instrument Attitude Mode	Instrument Attitude initialised with angles	XP_INSTR_ATT_ANGLE_INIT_MODE	0
	Instrument Attitude initialised with matrices	XP_INSTR_ATT_MATRIX_INIT_MODE	1
	Instrument Attitude initialised with Harmonics	XP_INSTR_ATT_INIT_HARMONIC_MODE	2
	Instrument Attitude initialised with a File	XP_INSTR_ATT_INIT_FILE_MODE	3
Attitude Mode	Attitude not calculated	XP_ATTITUDE_INIT_NO_DATA_MODE	0
	Attitude calculated	XP_ATTITUDE_COMPUTE_MODE	1
	Attitude defined by the user	XP_ATTITUDE_USER_SET_MODE	2

*Table 3: Enumerations within EXPLORER\_POINTING library*

Input	Description	Enumeration value	Long
Target Mode	Target calculated with Inter (1st) function	XP_TARGET_INTER_1ST_MODE	0
	Target calculated with Inter (2nd) function	XP_TARGET_INTER_2ND_MODE	1
	Target calculated with Travel Time (1st) function	XP_TARGET_TRAVEL_TIME_1ST_MODE	2
	Target calculated with Travel Time (2nd) function	XP_TARGET_TRAVEL_TIME_2ND_MODE	3
	Target calculated with Ground Range function	XP_TARGET_GROUND_RANGE_MODE	4
	Target calculated with Incidence Angle function	XP_TARGET_INCIDENCE_ANGLE_MODE	5
	Target calculated with Range function	XP_TARGET_RANGE_MODE	6
	Target calculated with Range Rate function	XP_TARGET_RANGE_RATE_MODE	7
	Target calculated with Tangent function	XP_TARGET_TANGENT_MODE	8
	Target calculated with Altitude function	XP_TARGET_ALTITUDE_MODE	9
	Target calculated with Star function	XP_TARGET_STAR_MODE	10
	Target calculated with Tangent to Sun function	XP_TARGET_TANGENT_SUN_MODE	11
	Target calculated with Tangent to Moon function	XP_TARGET_TANGENT_MOON_MODE	12
	Target calculated with Station function	XP_TARGET_STATION_MODE	13
	Target calculated with DRS function	XP_TARGET_DRS_MODE	14
	Target calculated with Generic function	XP_TARGET_GENERIC_MODE	15
	Target calculated with Multi Inter (1st) function	XP_MULTI_TARGET_INTER_1ST_MODE	16
	Target calculated with Multi Inter (2nd) function	XP_MULTI_TARGET_INTER_2ND_MODE	17
	Target calculated with Multi Travel Time (1st) function	XP_MULTI_TARGET_TRAVEL_TIME_1ST_MODE	18
Target calculated with Multi Travel Time (2nd) function	XP_MULTI_TARGET_TRAVEL_TIME_2ND_MODE	19	

## 6.3 Data Structures

The aim of the current section is to present the data structures that are used in the EXPLORER\_POINTING library. The structures are currently used for the CFI Identifiers accessor functions. The following table show the structures with their names and the data that contain:

*Table 4: EXPLORER\_POINTING structures*

Structure name	Data		
	Variable Name	C type	Description
xp_param_model_str	model_param	double [XP_NUM_MODEL_PARAM]	Model Parameters
	model_enum	long	Model type
xp_harmonic_data	num_terms	long [3]	Number of harmonics coefficient(pitch, roll and yaw)
	harmonic_type_pitch	long [XP_MAX_NUM_HARMONIC]	Harmonic type
	harmonic_type_roll	long [XP_MAX_NUM_HARMONIC]	Harmonic type
	harmonic_type_yaw	long [XP_MAX_NUM_HARMONIC]	Harmonic type
	harmonic_coef_pitch	double [XP_MAX_NUM_HARMONIC]	Harmonic coefficient
	harmonic_coef_roll	double [XP_MAX_NUM_HARMONIC]	Harmonic coefficient
	harmonic_coef_yaw	double [XP_MAX_NUM_HARMONIC]	Harmonic coefficient
xp_harmonic_model_str	angle_type	long	Angle type
	harmonic	xp_harmonic_data	Harmonic data
xp_att_data_rec	time_ref	long	Time reference
	time	double	Time for the quaternions/angles
	quaternion	double [4]	Quaternions
	angles	double [3]	Angles
	file_model	long	File model

Table 4: EXPLORER\_POINTING structures

Structure name	Data		
	Variable Name	C type	Description
xp_sat_nom_att_file_model_str	val_time0	double	Validity start time
	val_time1	double	Validity stop time
	data_type	long	0 = quaternions 1 = angles
	inertial_frame	long	initial reference frame: Inertial reference frame
	lines	long	number of records in the attitude lists
	max_gap	double	
	att_data	xp_att_data_rec*	array with the angle/quaternion records
xp_angle_model_str	pitch	double	Pitch
	roll	double	Roll
	yaw	double	Yaw
xp_matrix_model_str	att_matrix	double [3][3]	Attitude matrix
xp_star_tracker	quaternion[4]	float	Quaternions
	time	double	Quaternion time in TAI
	status	unsigned char	Quaternions status
xp_star_tracker_aux	star_tr_id	long	Star tracker Id (1,2 or 3)
	str_att_rot	double [3][3]	Satellite attitude frame to star tracker rotation matrix
xp_sat_att_file_model_str	file_model	long	file model
	val_time0	double	Validity start time
	val_time1	double	Validity stop time
	data_type	long	0 = quaternions 1 = angles
	inertial_frame	long	initial reference frame
	lines	long	number of records in the attitude lists
	max_gap	double	Maximum time gap between angles or quaternions
	att_data	xp_att_data_rec*	Array with the angle/quaternion records
	aux_data	xp_star_tracker_aux	Data from the auxiliary file
tm_data	xp_star_tracker*	Cryosat Star Tracker attitude data	

Table 4: EXPLORER\_POINTING structures

Structure name	Data		
	Variable Name	C type	Description
xp_instr_att_file_model_str	file_model	long	File model
	val_time0	double	Validity start time
	val_time1	double	Validity stop time
	data_type	long	0 = quaternions 1 = angles
	inertial_frame	long	initial reference frame
	lines	long	number of records in the attitude lists
	max_gap	double	Maximum gap between quaternions/angles
	att_data	xp_att_data_rec*	array with the angle/quaternion records
xp_attitude_id_data	model	long	
	time_ref	long	Time reference
	time	double	Time
	sat_vector	x1_cord	Satellite vector (EF)
	source_frame	long	Source reference frame
	target_frame	long	Target reference frame
	sat_mat	x1_cs_tra	Attitude matrix. Provides transformation from source to target frame
	offset	double [3]	Offsets from Quasi-True of Date to target frame
xp_atmos_id_data	atm_max_alt_std	double	Standard atmosphere geometric altitude
	atm_max_alt_user	double	User atmosphere geometric altitude

Table 4: EXPLORER\_POINTING structures

Structure name	Data		
	Variable Name	C type	Description
xp_dem_ace	dir	char [100]	Directory for the the DEM files
	res_X	double	Interval between points along X-axis
	res_Y	double	Interval between points along Y-axis
	res_unit	double	Conversion factor from x,y units to the res_X, res_Y units. for example if res_X is given in seconds and X in degrees => res_unit=3600
	X_num_points	long	Number of points along X-axis (columns)
	Y_num_points	long	Number of points along Y-axis (lines)
	x_range	double	Longitude of the x-axis for one file (grid)
	y_range	double	longitude of the y-axis for one file (grid)
	data_size	long	Size in bytes of the data stored in the files
	north_alt	double[4]	Altitude at the North pole cell
south_alt	double[4]	Altitude at the South pole cell	
xp_dem_id_data	model	long	DEM model
	dem_data	xp_dem_ace *	DEM configuration data
xp_generic_data	time_ref	long	Time reference
	time	double	Time
	sat_vector	xl_cord	Satellite state vector (see [DAT_SUM])
	freq	double	Frequency
	deriv	long	Derivative flag according to derivatives enumeration in [DAT_SUM]
xp_target_data	tar_vector	xl_cord	target vector
	z_tan	xl_par_der	Tangent altitude
	range	xl_par_der	target range
	time	xl_par_der	time
	tar_sat_vector	xl_cord	target to satellite vector
	sat_tar_vector	xl_cord	satellite to target vector
xp_target_str	num_target	long	Number of targets
	target	xp_target_data *	target data

*Table 4: EXPLORER\_POINTING structures*

Structure name	Data		
	Variable Name	C type	Description
xp_target_id_data	generic_data	xp_generic_data	Target generic data
	earth_crossed	long	Flag to indicate if the Earth is crossed
	atm_crossed	long	Flag to indicate if the atmosphere is crossed
	user	xp_target_str	User target
	los	xp_target_str	LOS target
	earth	xp_target_str	Earth target
	exit_atm_vector	xl_cord	Pointing vector at exit from atmosphere



---

## 7 CFI FUNCTIONS DESCRIPTION

The following sections describe each CFI function.

The calling interfaces are described for both C and ForTran users.

Input and output parameters of each CFI function are described in tables, where C programming language syntax is used to specify:

- Parameter types (e.g. long, double)
- Array sizes of N elements (e.g. param[N])
- Array element M (e.g. [M])

ForTran users should adapt the tables using ForTran syntax equivalent terms:

- Parameter types (e.g. long  $\Leftrightarrow$  INTEGER\*4, double  $\Leftrightarrow$  REAL\*8)
- Array sizes of N elements (e.g. param[N]  $\Leftrightarrow$  param (N))
- Array element M (e.g. [M]  $\Leftrightarrow$  (M+1))

## 7.1 xp\_sat\_nominal\_att\_init

### 7.1.1 Overview

The **xp\_sat\_nominal\_att\_init** CFI function initialises the AOCS mode for a given satellite. The initialised mode will be stored in the *sat\_nom\_trans\_id* output structure.

### 7.1.2 Calling Interface

The calling interface of the **xp\_sat\_nominal\_att\_init** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long aocs_mode;
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    long ierr[XP_NUM_ERR_NOM_ATT_INIT_DEF], status;

    status = xp_sat_nominal_att_init(&aocs_mode,
                                    &sat_nom_trans_id, ierr);
}
```

The `XP_NUM_ERR_SAT_NOM_ATT_INIT` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 AOCS_MODE
    INTEGER*4 IERR(XP_NUM_ERR_SAT_NOM_ATT_INIT), STATUS

    STATUS = XP_SAT_NOMINAL_ATT_INIT(SAT_ID, AOCS_MODE, IERR)
```

### 7.1.3 Input Parameters

The `xp_sat_nominal_att_init` CFI function has the following input parameters:

*Table 5: Input parameters of `xp_sat_nominal_att_init` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>aocs_mode</code>	<code>long *</code>	-	AOCS Mode ID	-	Complete

It is possible to use enumeration values rather than integer values for some of the input arguments:

- AOCS Mode ID: `aocs_mode`. See current document, table 3.

### 7.1.4 Output Parameters

The output parameters of the `xp_sat_nominal_att_init` CFI function are:

*Table 6: Output parameters of `xp_sat_nominal_att_init`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>sat_nom_trans_id</code>	<code>xp_sat_nom_trans_id*</code>	-	Structure that contains the Satellite nominal Transformation	-	-
<code>ierr</code>	<code>long</code>	-	Error vector	-	-

### 7.1.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_nominal_att_init` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_nominal_att_init` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 7: Error messages of `xp_sat_nominal_att_init` function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_SAT_NOMINAL_ATT_INIT_MEMORY_ERR	0

### 7.1.6 Runtime Performances

The following runtime performances have been measured.

*Table 8: Runtime performances of xp\_sat\_nominal\_att\_init*

Ultra Sparc II-400 [ms]
TBD

## 7.2 xp\_sat\_nominal\_att\_init\_model

### 7.2.1 Overview

The **xp\_sat\_nominal\_att\_init\_model** CFI function initialises the satellite nominal attitude model for a given satellite. The initialised model will be stored in the *sat\_nom\_trans\_id* output structure.

### 7.2.2 Calling Interface

The calling interface of the **xp\_sat\_nominal\_att\_init\_model** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long model_enum;
    double model_param[XP_NUM_MODEL_PARAM];
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    long ierr[XP_NUM_ERR_SAT_NOM_ATT_INIT_MODEL], status;

    status = xp_sat_nominal_att_init_model(&model_enum,
                                           model_param,
                                           &sat_nom_trans_id, ierr);
}
```

The XP\_NUM\_ERR\_SAT\_NOM\_ATT\_INIT\_MODEL and XP\_NUM\_MODEL\_PARAM constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 MODEL_ENUM
    REAL*8 MODEL_PARAM(XP_NUM_MODEL_PARAM)
    INTEGER*4 IERR(XP_NUM_ERR_SAT_NOM_ATT_INIT_MODEL), STATUS

    STATUS = XP_SAT_NOMINAL_ATT_INIT_MODEL(SAT_ID, MODEL_ENUM,
&      MODEL_PARAM, IERR)
```

### 7.2.3 Input Parameters

The `xp_sat_nominal_att_init_model` CFI function has the following input parameters:

*Table 9: Input parameters of `xp_sat_nominal_att_init_model` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
model_enum	long *	-	Sat Nom Attitude Model ID	-	Complete
model_param	double	-	Model dependant parameters	-	Complete

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Satellite Nominal Attitude Model ID: `model_enum`. See current document, table 3.
- Model dependant parameters: `model_param`. See current document, table 10

*Table 10: Model parameters depending on the attitude model*

Attitude Model	Array Element	Description (Reference)	Unit (Format)
XP_MODEL_GENERIC	[0]	First Axis enumeration value	-
	[1]	First Target enumeration value	-
	[2]	First Vector[0]	- or deg
	[3]	First Vector[1]	- or deg
	[4]	First Vector[2]	- or deg
	[5]	Second Axis enumeration value	
	[6]	Second Target enumeration value	
	[7]	Second Vector[0]	- or deg
	[8]	Second Vector[1]	- or deg
	[9]	Second Vector[2]	- or deg
XP_MODEL_ENVISAT	[0]	AOCS Cx parameter [pitch]	deg
	[1]	AOCS Cy parameter [roll]	deg
	[2]	AOCS Cz parameter [yaw]	deg
XP_MODEL_CRYOSAT	[0]	Local Normal Z Coefficient	-
XP_MODEL_ADM	[0]	Scan Angle	deg
	[1]	Scan Limit	deg
	[2]	Velocity Offset	m/s

#### 7.2.3.1 Generic Model description

The generic model builds the reference frames from the specified direction vectors.

The model parameters are:

- `first_axis`: It can be any of {`+/-XP_X_AXIS`, `+/-XP_Y_AXIS`, `+/-XP_Z_AXIS`}

- `first_target`: It can be any of {`XP_SUN_VEC`, `XP_MOON_VEC`, `XP_EARTH_VEC`, `XP_NADIR_VEC`, `XP_INERTIAL_VEL_VEC`, `XP_EF_VEL_VEC`, `XP_INERTIAL_TARGET_VEC`, `XP_EF_TARGET_VEC`}
- `first_vector[3]`: contains either dummies, [long, lat, alt] (if `first_target=XP_EF_TARGET_VEC`) or [ra, decl, parallax] (if `first_target=XP_INERTIAL_TARGET_VEC`)
- `second_axis`: It can be any of {`+/-XP_X_AXIS`, `+/-XP_Y_AXIS`, `+/-XP_Z_AXIS`}
- `second_target`: It can be any of {`XP_SUN_VEC`, `XP_MOON_VEC`, `XP_EARTH_VEC`, `XP_NADIR_VEC`, `XP_INERTIAL_VEL_VEC`, `XP_EF_VEL_VEC`, `XP_INERTIAL_TARGET_VEC`, `XP_EF_TARGET_VEC`}
- `second_vector[3]`: contains either dummies, [long, lat, alt] (if `first_target=XP_EF_TARGET_VEC`) or [ra, decl, parallax] (if `first_target=XP_INERTIAL_TARGET_VEC`)

It is necessary to define a convention for each target type (e.g, always from Satellite to XXX):

- `XP_SUN_VEC`: Unit direction vector from Satellite to Sun
- `XP_MOON_VEC`: Unit direction vector from Satellite to Moon
- `XP_EARTH_VEC`: Unit direction vector from Satellite to Earth centre (opposite to Satellite Position Vector)
- `XP_NADIR_VEC`: Unit direction vector from Satellite to Nadir point
- `XP_INERTIAL_VEL_VEC`: Inertial Velocity vector (in TOD)
- `XP_EF_VEL_VEC`: Earth Fixed Velocity vector
- `XP_INERTIAL_TARGET_VEC`: Unit direction vector from Satellite to a target defined by a given [ra, decl, parallax]. The annual parallax is used in case we are pointing to a close object (for instance, the Moon), in order to get the distance. For stars, parallax=0 shall be used, meaning infinite distance. Units: degrees
- `XP_EF_TARGET_VEC`: Unit direction vector from Satellite to a target defined by a given [long, lat, alt]

With these parameters, the calculation is done as follows:

- Compute the unit direction vector specified by `first_target`
  - Assign the calculated first target vector to the first axis vector
- Compute the unit direction vector specified by `second_target`
  - Cross-product of the first axis vector and the second target vector
  - Assign the resulting vector to the second axis vector
  - Complete the right-handed frame

The following are some examples:

### 3. Sun-Fixed Reference Frame

- `model_param = {XP_X_AXIS, XP_SUN_VEC, 0.0, 0.0, 0.0, XP_Z_AXIS, XP_EARTH_VEC, 0.0, 0.0, 0.0}`

Then:

- X-axis = Unit vector from Satellite to Sun (Sun Vector)
- Z-axis = Unit cross product: X-axis x (Unit vector from Satellite to Earth (Earth Vector))
- Y-axis = Z-axis x X-axis (completing the right-handed frame)

### 4. Yaw Steering Mode

- `model_param={-XP_Z_AXIS, XP_NADIR_VEC, 0.0, 0.0, 0.0, XP_X_AXIS, XP_EF_VEL_VEC, 0.0, 0.0, 0.0}`

Then:

- Z-axis = -(Unit vector from Satellite to Nadir (Nadir Vector))

- X-axis = Unit cross product: Z-axis x (Earth-Fixed Velocity Vector)
- Y-axis = Z-axis x X-axis (completing the right-handed frame)

### 7.2.4 Output Parameters

The output parameters of the `xp_nominal_att_init_model` CFI function are:

*Table 11: Output parameters of xp\_sat\_nominal\_att\_init\_model*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id*	-	Structure that contains the Satellite nominal Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.2.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_nominal_att_init_model` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_nominal_att_init_model` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 12: Error messages of xp\_sat\_nominal\_att\_init\_model function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_SAT_NOMINAL_ATT_INIT_MODEL_MEMORY_ERR	0

### 7.2.6 Runtime Performances

The following runtime performances have been measured.

*Table 13: Runtime performances of xp\_sat\_nominal\_att\_init\_model*

Ultra Sparc II-400 [ms]
TBD



## 7.3 xp\_sat\_nominal\_att\_init\_harmonic

### 7.3.1 Overview

The **xp\_sat\_nominal\_init\_harmonic** CFI function initialises the satellite orbital to satellite nominal attitude mispointing angles for a given satellite with a user-provided set of values. The initialised values will be stored in the *sat\_nom\_trans\_id* output structure.

The *xp\_attitude* and *xp\_change\_frame* functions will then compute the values as follows:

$$\begin{aligned}
 \text{attitudeangle} = & \text{bias} + 1\text{stsincoef} \cdot \sin\left(\frac{\text{angle} \cdot 2\pi}{360}\right) + 1\text{stcoscoef} \cdot \cos\left(\frac{\text{angle} \cdot 2\pi}{360}\right) \\
 & + 2\text{ndsinccoef} \cdot \sin\left(\frac{2 \cdot \text{angle} \cdot 2\pi}{360}\right) + 2\text{ndcoscoef} \cdot \cos\left(\frac{2 \cdot \text{angle} \cdot 2\pi}{360}\right) \\
 & + 3\text{rdsinccoef} \cdot \sin\left(\frac{3 \cdot \text{angle} \cdot 2\pi}{360}\right) + 3\text{rdcoscoef} \cdot \cos\left(\frac{3 \cdot \text{angle} \cdot 2\pi}{360}\right) \\
 & + \dots
 \end{aligned}$$

### 7.3.2 Calling Interface

The calling interface of the **xp\_sat\_nominal\_att\_init\_harmonic** CFI function is the following (input parameters are underlined):

```

#include <explorer_pointing.h>
{
    long angle_type, num_terms[3];
    long harmonic_type_pitch[XP_MAX_NUM_HARMONIC],
        harmonic_type_roll[XP_MAX_NUM_HARMONIC],
        harmonic_type_yaw[XP_MAX_NUM_HARMONIC];
    double harmonic_coef_pitch[XP_MAX_NUM_HARMONIC],
        harmonic_coef_roll[XP_MAX_NUM_HARMONIC],
        harmonic_coef_yaw[XP_MAX_NUM_HARMONIC];
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    long ierr[XP_NUM_ERR_SAT_NOM_ATT_INIT_HARMONIC], status;

    status = xp_sat_nominal_att_init_harmonic(&angle_type,
                                             num_terms,
                                             harmonic_type_pitch,
                                             harmonic_type_roll,
                                             harmonic_type_yaw,
                                             harmonic_coef_pitch,

```

```

        harmonic_coef_roll,
        harmonic_coef_yaw,
        &sat_nom_trans_id,
        ierr);
}

```

The XP\_NUM\_ERR\_SAT\_NOM\_ATT\_INIT\_HARMONIC and XP\_MAX\_NUM\_HARMONIC constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```

#include <explorer_pointing.inc>
    INTEGER*4 ANGLE_TYPE, NUM_TERMS(3)
    INTEGER*4 HARMONIC_TYPE_PITCH(XP_MAX_NUM_HARMONIC),
&            HARMONIC_TYPE_ROLL(XP_MAX_NUM_HARMONIC),
&            HARMONIC_TYPE_YAW(XP_MAX_NUM_HARMONIC)
    REAL*8 HARMONIC_COEF_PITCH(XP_MAX_NUM_HARMONIC),
&         HARMONIC_COEF_ROLL(XP_MAX_NUM_HARMONIC),
&         HARMONIC_COEF_YAW(XP_MAX_NUM_HARMONIC)
    INTEGER*4 IERR(XP_NUM_ERR_SAT_NOMINAL_ATT_INIT_HARMONIC),
&           STATUS

    STATUS = XP_SAT_NOMINAL_ATT_INIT_HARMONIC(SAT_ID, ANGLE_TYPE,
&      NUM_TERMS, HARMONIC_TYPE_PITCH,
&      HARMONIC_TYPE_ROLL, HARMONIC_TYPE_YAW,
&      HARMONIC_COEF_PITCH, HARMONIC_COEF_ROLL,
&      HARMONIC_COEF_YAW, IERR)

```

### 7.3.3 Input Parameters

The `xp_sat_nominal_att_init_harmonic` CFI function has the following input parameters:

Table 14: Input parameters of `xp_sat_nominal_att_init_harmonic` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>angle_type</code>	<code>long *</code>	-	Type of angle	-	XP_ANGLE_TYP E_TRUE_LAT_T OD XP_ANGLE_TYP E_MEAN_LAT_T OD
<code>num_terms[3]</code>	<code>long</code>	[0]	Number of elements used in vectors <code>harmonic_type_pitch</code> and <code>harmonic_coef_pitch</code>	-	$\geq 0$
		[1]	Number of elements used in vectors <code>harmonic_type_roll</code> and <code>harmonic_coef_roll</code>	-	$\geq 0$
		[2]	Number of elements used in vectors <code>harmonic_type_yaw</code> and <code>harmonic_coef_yaw</code>	-	$\geq 0$
<code>harmonic_type_pitch</code>	<code>long[XP_MAX_NUM_HARMONIC]</code>	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	
<code>harmonic_type_roll</code>	<code>long[XP_MAX_NUM_HARMONIC]</code>	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	-
<code>harmonic_type_yaw</code>	<code>long[XP_MAX_NUM_HARMONIC]</code>	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	-

*Table 14: Input parameters of xp\_sat\_nominal\_att\_init\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
harmonic_coef_pitch	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the pitch angle	deg	-
harmonic_coef_roll	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the roll angle	deg	-
harmonic_coef_yaw	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the yaw angle	deg	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Angle Type: See current document, table 3.

### 7.3.4 Output Parameters

The output parameters of the `xp_sat_nominal_att_init_harmonic` CFI function are:

*Table 15: Output parameters of xp\_sat\_nominal\_att\_init\_harmonic*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id*	-	Structure that contains the Satellite nominal Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.3.5 Example

For the satellite ERS:

$\text{pitch} = -0.16725 \cdot \cos(\text{true\_lat}) \cdot \sin(\text{true\_lat}) \cdot 2 = -0.16725 \cdot \sin(2 \cdot \text{true\_lat})$

`num_terms[0]=1`

`harmonic_type_pitch={-2} harmonic_coef_pitch={-0.16725}`

$\text{roll} = 0.05012 \cdot \sin(\text{true\_lat})$

`num_terms[1]=1`

`harmonic_type_roll={-1} harmonic_coef_roll={0.05012}`

$\text{yaw} = 3.9163 \cdot \cos(\text{true\_lat})$

`num_terms[2]=1`

`harmonic_type_yaw={+1} harmonic_coef_yaw={3.9163}`

### 7.3.6 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_nominal_att_init_harmonic` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_nominal_att_init_harmonic` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 16: Error messages of xp\_sat\_nominal\_att\_init\_harmonic function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_SAT_NOMINAL_ATT_INIT_HARMONIC_MEMORY_ERROR	0

### 7.3.7 Runtime Performances

The following runtime performances have been measured:

*Table 17: Runtime performances of xp\_sat\_att\_nominal\_init\_harmonic*

Ultra Sparc II-400 [ms]
TBD

## 7.4 xp\_sat\_nominal\_att\_init\_file

### 7.4.1 Overview

The **xp\_sat\_nominal\_att\_init\_file** CFI function initialises the satellite nominal attitude angles for a given satellite reading values from the attitude file(s). The validity time or orbital range for the attitude angles can be specified by the user. The initialised values will be stored in the *sat\_nom\_trans\_id* output structure.

### 7.4.2 Calling Interface

The calling interface of the **xp\_sat\_nominal\_att\_init\_file** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xl_time_id time_id = {NULL};
    long n_files, time_init_mode, time_ref;
    char **attitude_file;
    double time0, time1;
    double val_time0, val_time1;
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    long ierr[XP_NUM_ERR_SAT_NOM_ATT_INIT_FILE], status;

    status = xp_sat_nominal_att_init_file(&time_id, &n_files,
        &attitude_file, &time_init_mode, &time_ref, &time0, &time1,
        &val_time0, &val_time1, &sat_nom_trans_id, ierr);
}
```

The `XP_NUM_ERR_SAT_NOM_ATT_INIT_FILE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, N_FILES, TIME_INIT_MODE, TIME_REF
    INTEGER*4 ORBIT0, ORBIT1
    CHARACTER*LENGTH_NAME ATTITUDE_FILE(NUM_FILES)
    REAL*8 TIME0, TIME1
    INTEGER*4 IERR(XP_NUM_ERR_SAT_NOM_ATT_INIT_FILE), STATUS

    STATUS = XP_SAT_NOMINAL_ATT_INIT_FILE(SAT_ID, N_FILES,
&      ATTITUDE_FILE, TIME_INIT_MODE, TIME_REF, TIME0, TIME1,
&      ORBIT0, ORBIT1, IERR)
```

### 7.4.3 Input Parameters

The `xp_sat_nominal_att_init_file` CFI function has the following input parameters:

Table 18: Input parameters of `xp_sat_nominal_att_init_file` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
time_id	xl_time_id*	-	Structure that contains the time correlations.	-	-
n_files	long *	-	Number of reference data files	-	> 0
attitude_file	char **	-	Filenames of the reference data files. In case multiple files are used, the files should be time ordered. The supported Attitude File format is the Generic Attitude File as described in APPENDIX C.	-	-
time_init_mode	long *	-	Flag for selecting the time range of the initialisation.	-	Select either: · XP_SEL_TIME · XP_SEL_FILE
time_ref	long *	-	Time reference ID	-	Complete
time0	double*	-	If: <code>time_init_mode=XP_SEL_TIME</code> S Start of the time range defined by [time0,time1]	Decimal days (Processing format)	[-18262.0,36524.0]
time1	double*	-	If: <code>time_init_mode=XP_SEL_TIME</code> End of the time range defined by [time0,time1]	Decimal days (Processing format)	[-18262.0,36524.0] > time0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Time Reference ID: `time_ref`. See [GEN\_SUM].
- Time Init Mode ID: `time_init_mode`. See current document, table 3.

### 7.4.4 Output Parameters

The output parameters of the `xp_sat_nominal_att_init_file` CFI function are:

*Table 19: Output parameters of `xp_sat_nominal_att_init_file`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>val_time0</code>	<code>double*</code>	-	Validity start time of the initialization	Decimal days (Processing format)	[-18262.0,36524.0]
<code>val_time1</code>	<code>double*</code>	-	Validity end time of the initialization	Decimal days (Processing format)	[-18262.0,36524.0]
<code>sat_nom_trans_id</code>	<code>xp_sat_nom_trans_id*</code>	-	Structure that contains the Satellite nominal Transformation	-	-
<code>ierr</code>	<code>long</code>	-	Error vector	-	-

### 7.4.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_nominal_att_init_file` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_nominal_att_init_file` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 20: Error messages of `xp_sat_nominal_att_init_file` function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	<code>XP_CFI_SAT_NOMINAL_ATT_INIT_FILE_MEMORY_ERR</code>	0
ERR	Wrong input time reference	No calculation performed	<code>XP_CFI_SAT_NOMINAL_ATT_INIT_FILE_WRONG_TIME_REF_ERR</code>	1



### 7.4.6 Runtime Performances

The following runtime performances have been measured.

*Table 21: Runtime performances of xp\_sat\_nominal\_att\_init\_file*

Ultra Sparc II-400 [ms]
TBD

## 7.5 xp\_sat\_nominal\_att\_close

### 7.5.1 Overview

The **xp\_sat\_nominal\_att\_close** CFI function cleans up any memory allocation performed by the satellite nominal attitude initialization functions.

### 7.5.2 Calling Interface

The calling interface of the **xp\_sat\_nominal\_att\_close** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    long ierr[XP_NUM_ERR_SAT_NOM_ATT_CLOSE], status;

    status = xp_sat_nominal_att_close(&sat_nom_trans_id, ierr);
}
```

The `XP_NUM_ERR_SAT_NOM_ATT_CLOSE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID
    INTEGER*4 IERR(XP_NUM_ERR_SAT_NOMINAL_ATT_CLOSE), STATUS

    STATUS = XP_SAT_NOMINAL_ATT_CLOSE(SAT_ID, IERR)
```

### 7.5.3 Input Parameters

The `xp_sat_nominal_att_close` CFI function has the following input parameters:

*Table 22: Input parameters of `xp_sat_nominal_att_close` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id*	-	Structure that contains the Satellite Nom. Trans.	-	-

### 7.5.4 Output Parameters

The output parameters of the `xp_sat_nominal_att_close` CFI function are:

*Table 23: Output parameters of `xp_sat_nominal_att_close`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ierr	long	-	Error vector	-	-

### 7.5.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_nominal_att_close` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_nominal_att_close` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 24: Error messages of `xp_sat_nominal_att_close` function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Could not close the Id. as it is not initialized or it is being used	No calculation performed	XP_CFI_SAT_NOMINAL_ATT_CLOSE_WRONG_ID_ERR	0

### ***7.5.6 Runtime Performances***

The following runtime performances have been measured.

*Table 25: Runtime performances of xp\_sat\_nominal\_att\_close*

Ultra Sparc II-400 [ms]
TBD

## 7.6 xp\_sat\_nominal\_att\_get\_aocs

### 7.6.1 Overview

The `xp_sat_nominal_att_get_aocs` CFI function returns AOCS mode used for the satellite nominal attitude initialization.

### 7.6.2 Calling interface

The calling interface of the `xp_sat_nominal_att_get_aocs` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id;
    long status, aocs_model;
    status = xp_sat_nominal_att_get_aocs (&sat_nom_trans_id,
                                         &aocs_model);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.6.3 Input parameters

The `xp_sat_nominal_att_get_aocs` CFI function has the following input parameters:

*Table 26: Input parameters of xp\_sat\_nominal\_att\_get\_aocs function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID.	-	-

### 7.6.4 Output parameters

The output parameters of the `xp_sat_nominal_att_get_aocs` CFI function are:

*Table 27: Output parameters of xp\_sat\_nominal\_att\_get\_aocs function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_nominal_att_get_aocs	long	-	Status flag	-	-

*Table 27: Output parameters of xp\_sat\_nominal\_att\_get\_aocs function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
aocs_model	long	-	AOCS model	-	-

### 7.6.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_nom\_trans\_id was not initialised.
- The sat\_nom\_trans\_id initialisation does not allow the use of this function.

### 7.6.6 Runtime performances

The following runtime performances have been estimated.

*Table 28: Runtime performances of xp\_sat\_nominal\_att\_get\_aocs function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.7 xp\_sat\_nominal\_att\_set\_aocs

### 7.7.1 Overview

The `xp_sat_nominal_att_set_aocs` CFI function changes the AOCS mode used for the satellite nominal attitude initialization.

### 7.7.2 Calling interface

The calling interface of the `xp_sat_nominal_att_set_aocs` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id;
    long status, aocs_model;
    status = xp_sat_nominal_att_set_aocs (&sat_nom_trans_id,
                                         &aocs_model);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.7.3 Input parameters

The `xp_sat_nominal_att_set_aocs` CFI function has the following input parameters:

*Table 29: Input parameters of xp\_sat\_nominal\_att\_set\_aocs function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID (input / output parameter)	-	-
aocs_model	long	-	AOCS model	-	-

### 7.7.4 Output parameters

The output parameters of the `xp_sat_nominal_att_set_aocs` CFI function are:

*Table 30: Output parameters of xp\_sat\_nominal\_att\_set\_aocs function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_nominal_att_set_aocs	long	-	Status flag	-	-
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID (input / output parameter)	-	-

### 7.7.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_nom\_trans\_id was not initialised.
- The sat\_nom\_trans\_id initialisation does not allow the use of this function.

### 7.7.6 Runtime performances

The following runtime performances have been estimated.

*Table 31: Runtime performances of xp\_sat\_nominal\_att\_set\_aocs function*

Ultra Sparc II-400 [ms]
TBD



## 7.8 xp\_sat\_nominal\_att\_get\_param

### 7.8.1 Overview

The **xp\_sat\_nominal\_att\_get\_param** CFI function returns parameters used for the satellite nominal attitude initialization.

### 7.8.2 Calling interface

The calling interface of the **xp\_sat\_nominal\_att\_get\_param** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id;
    long status;
    xp_param_model_str data;
    status = xp_sat_nominal_att_get_param (&sat_nom_trans_id,
                                          &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.8.3 Input parameters

The **xp\_sat\_nominal\_att\_get\_param** CFI function has the following input parameters:

*Table 32: Input parameters of xp\_sat\_nominal\_att\_get\_param function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID.	-	-

### 7.8.4 Output parameters

The output parameters of the **xp\_sat\_nominal\_att\_get\_param** CFI function are:

*Table 33: Output parameters of xp\_sat\_nominal\_att\_get\_param function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_nominal_att_get_param	long	-	Status flag	-	-
data	xp_param_mode_l_str	-	Attitude initialization data	-	-

### 7.8.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_nom\_trans\_id was not initialised.
- The sat\_nom\_trans\_id initialisation does not allow the use of this function.

### 7.8.6 Runtime performances

The following runtime performances have been estimated.

*Table 34: Runtime performances of xp\_sat\_nominal\_att\_get\_param function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.9 xp\_sat\_nominal\_att\_set\_param

### 7.9.1 Overview

The **xp\_sat\_nominal\_att\_set\_param** CFI function changes the parameters used for the satellite nominal attitude initialization.

### 7.9.2 Calling interface

The calling interface of the **xp\_sat\_nominal\_att\_set\_param** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id;
    long status;
    xp_param_model_str data;
    status = xp_sat_nominal_att_set_param (&sat_nom_trans_id,
                                           &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.9.3 Input parameters

The **xp\_sat\_nominal\_att\_set\_param** CFI function has the following input parameters:

*Table 35: Input parameters of xp\_sat\_nominal\_att\_set\_param function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID (input / output parameter)	-	-
data	xp_param_model_str	-	Attitude initialization data	-	-

### 7.9.4 Output parameters

The output parameters of the **xp\_sat\_nominal\_att\_set\_param** CFI function are:

*Table 36: Output parameters of xp\_sat\_nominal\_att\_set\_param function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_nominal_att_set_param	long	-	Status flag	-	-
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID (input / output parameter)	-	-

### 7.9.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_nom\_trans\_id was not initialised.
- The sat\_nom\_trans\_id initialisation does not allow the use of this function.

### 7.9.6 Runtime performances

The following runtime performances have been estimated.

*Table 37: Runtime performances of xp\_sat\_nominal\_att\_set\_param function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.10 xp\_sat\_nominal\_att\_get\_harmonic

### 7.10.1 Overview

The `xp_sat_nominal_att_get_harmonic` CFI function returns harmonic data used for the satellite nominal attitude initialization.

### 7.10.2 Calling interface

The calling interface of the `xp_sat_nominal_att_get_harmonic` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id;
    long status;
    xp_harmonic_model_str data;
    status = xp_sat_nominal_att_get_harmonic (&sat_nom_trans_id,
                                             &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.10.3 Input parameters

The `xp_sat_nominal_att_get_harmonic` CFI function has the following input parameters:

*Table 38: Input parameters of xp\_sat\_nominal\_att\_get\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID.	-	-

### 7.10.4 Output parameters

The output parameters of the `xp_sat_nominal_att_get_harmonic` CFI function are:

*Table 39: Output parameters of xp\_sat\_nominal\_att\_get\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_nominal_att_get_harmonic	long	-	Status flag	-	-
data	xp_harmonic_m odel_str	-	Attitude initialization data	-	-

### 7.10.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_nom\_trans\_id was not initialised.
- The sat\_nom\_trans\_id initialisation does not allow the use of this function.

### 7.10.6 Runtime performances

The following runtime performances have been estimated.

*Table 40: Runtime performances of xp\_sat\_nominal\_att\_get\_harmonic function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.11 xp\_sat\_nominal\_att\_set\_harmonic

### 7.11.1 Overview

The **xp\_sat\_nominal\_att\_set\_harmonic** CFI function changes the harmonic data used for the satellite nominal attitude initialization.

### 7.11.2 Calling interface

The calling interface of the **xp\_sat\_nominal\_att\_set\_harmonic** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id;
    long status;
    xp_harmonic_model_str data;
    status = xp_sat_nominal_att_set_harmonic (&sat_nom_trans_id,
                                             &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.11.3 Input parameters

The **xp\_sat\_nominal\_att\_set\_harmonic** CFI function has the following input parameters:

*Table 41: Input parameters of xp\_sat\_nominal\_att\_set\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID (input / output parameter)	-	-
data	xp_harmonic_model_str	-	Attitude initialization data	-	-

### 7.11.4 Output parameters

The output parameters of the **xp\_sat\_nominal\_att\_set\_harmonic** CFI function are:

*Table 42: Output parameters of xp\_sat\_nominal\_att\_set\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_nominal_att_set_harmonic	long	-	Status flag	-	-
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID (input / output parameter)	-	-

### 7.11.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_nom\_trans\_id was not initialised.
- The sat\_nom\_trans\_id initialisation does not allow the use of this function.

### 7.11.6 Runtime performances

The following runtime performances have been estimated.

*Table 43: Runtime performances of xp\_sat\_nominal\_att\_set\_harmonic function*

<b>Ultra Sparc II-400 [ms]</b>
TBD



## 7.12 xp\_sat\_nominal\_att\_get\_file

### 7.12.1 Overview

The **xp\_sat\_nominal\_att\_get\_file** CFI function returns initialisation data from the satellite nominal attitude Id. when it was initialised with a file.

### 7.12.2 Calling interface

The calling interface of the **xp\_sat\_nominal\_att\_get\_file** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id;
    long status;
    xp_file_model_str data;
    status = xp_sat_nominal_att_get_file (&sat_nom_trans_id,
                                         &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the #include statement):

TBD

### 7.12.3 Input parameters

The **xp\_sat\_nominal\_att\_get\_file** CFI function has the following input parameters:

*Table 44: Input parameters of xp\_sat\_nominal\_att\_get\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID.	-	-

### 7.12.4 Output parameters

The output parameters of the **xp\_sat\_nominal\_att\_get\_file** CFI function are:

*Table 45: Output parameters of xp\_sat\_nominal\_att\_get\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_nominal_att_get_file	long	-	Status flag	-	-
data	xp_file_model_str	-	Attitude initialization data	-	-

### 7.12.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_nom\_trans\_id was not initialised.
- The sat\_nom\_trans\_id initialisation does not allow the use of this function.

### 7.12.6 Runtime performances

The following runtime performances have been estimated.

*Table 46: Runtime performances of xp\_sat\_nominal\_att\_get\_file function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.13 xp\_sat\_nominal\_att\_set\_file

### 7.13.1 Overview

The **xp\_sat\_nominal\_att\_set\_file** CFI function changes the initialization data for the satellite nominal attitude Id, when it was initialised with a file.

### 7.13.2 Calling interface

The calling interface of the **xp\_sat\_nominal\_att\_set\_file** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_nom_trans_id sat_nom_trans_id;
    long status;
    xp_file_model_str data;
    status = xp_sat_nominal_att_set_file (&sat_nom_trans_id,
                                         &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the #include statement):

TBD

### 7.13.3 Input parameters

The **xp\_sat\_nominal\_att\_set\_file** CFI function has the following input parameters:

*Table 47: Input parameters of xp\_sat\_nominal\_att\_set\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID (input / output parameter)	-	-
data	xp_file_model_str	-	Attitude initialization data	-	-

### 7.13.4 Output parameters

The output parameters of the **xp\_sat\_nominal\_att\_set\_file** CFI function are:

*Table 48: Output parameters of xp\_sat\_nominal\_att\_set\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_nominal_att_set_file	long	-	Status flag	-	-
sat_nom_trans_id	xp_sat_nom_trans_id *	-	Satellite nominal transformation ID (input / output parameter)	-	-

### 7.13.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_nom\_trans\_id was not initialised.
- The sat\_nom\_trans\_id initialisation does not allow the use of this function.

### 7.13.6 Runtime performances

The following runtime performances have been estimated.

*Table 49: Runtime performances of xp\_sat\_nominal\_att\_set\_file function*

Ultra Sparc II-400 [ms]
TBD

## 7.14 xp\_sat\_att\_angle\_init

### 7.14.1 Overview

The **xp\_sat\_att\_angle\_init** CFI function initialises the satellite nominal attitude to satellite attitude mis-pointing angles for a given satellite with a user-provided set of values. The initialised values will be stored in the *sat\_trans\_id* output structure.

### 7.14.2 Calling Interface

The calling interface of the **xp\_sat\_att\_angle\_init** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    double ang[3];
    xp_sat_trans_id sat_trans_id = {NULL};
    long ierr[XP_NUM_ERR_MISP_ANGLE_INIT_DEF], status;

    status = xp_sat_att_angle_init(ang, &sat_trans_id, ierr);
}
```

The `XP_NUM_ERR_SAT_ATT_ANGLE_INIT` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID
    REAL*8 ANG(3)
    INTEGER*4 IERR(XP_NUM_ERR_SAT_ATT_ANGLE_INIT), STATUS

    STATUS = XP_SAT_ATT_ANGLE_INIT(SAT_ID, ANG, IERR)
```

### 7.14.3 Input Parameters

The `xp_sat_att_angle_init` CFI function has the following input parameters:

Table 50: Input parameters of `xp_sat_att_angle_init` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ang	double[3]	[0]	Pitch mispointing angle (Satellite Nominal Attitude Frame)	deg	If no better value, assume 0.0
		[1]	Roll mispointing angle (Satellite Nominal Attitude Frame)	deg	If no better value, assume 0.0
		[2]	Yaw mispointing angle (Satellite Nominal Attitude Frame)	deg	If no better value, assume 0.0

### 7.14.4 Output Parameters

The output parameters of the `xp_sat_att_angle_init` CFI function are:

Table 51: Output parameters of `xp_sat_att_angle_init`

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id*	-	Structure that contains the Satellite Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.14.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_att_angle_init` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_att_angle_init` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

Table 52: Error messages of `xp_sat_att_angle_init` function

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_SAT_ATT_ANGLE_INIT_MEMORY_ERR	0

### 7.14.6 Runtime Performances

The following runtime performances have been measured.

*Table 53: Runtime performances of xp\_sat\_att\_angle\_init*

Ultra Sparc II-400 [ms]
TBD

## 7.15 xp\_sat\_att\_matrix\_init

### 7.15.1 Overview

The **xp\_sat\_att\_matrix\_init** CFI function initialises misalignment matrix between the satellite nominal attitude frame and satellite attitude frame with a user-provided matrix. The initialised values will be stored in the *sat\_trans\_id* output structure.

### 7.15.2 Calling Interface

The calling interface of the **xp\_sat\_att\_matrix\_init** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    double att_matrix[3][3];
    xp_sat_trans_id sat_trans_id = {NULL};
    long ierr[XP_NUM_ERR_SAT_ATT_MATRIX_INIT], status;

    status = xp_sat_att_matrix_init_def(att_matrix,
                                        &sat_trans_id, ierr);
}
```

The `XP_NUM_ERR_SAT_ATT_MATRIX_INIT` constant is defined in the file *explorer\_pointing.h*.

For ForTran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    REAL*8 ATT_MATRIX(3,3)
    INTEGER*4 IERR(XP_NUM_ERR_SAT_ATT_MATRIX_INIT), STATUS

    STATUS = XP_SAT_ATT_MATRIX_INIT_DEF(ATT_MATRIX, IERR)
```

Note: The matrices are handled differently in C and in ForTran programs. Details TBW.



### 7.15.3 Input Parameters

The `xp_sat_att_matrix_init` CFI function has the following input parameters:

*Table 54: Input parameters of `xp_sat_att_matrix_init` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
att_matrix	double[3][3]	all	Mispointing Matrix	-	-

### 7.15.4 Output Parameters

The output parameters of the `xp_sat_att_matrix_init` CFI function are:

*Table 55: Output parameters of `xp_sat_att_matrix_init`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id*	-	Structure that contains the Satellite Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.15.5 Example

TBD

### 7.15.6 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_att_matrix_init` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_att_matrix_init` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 56: Error messages of `xp_sat_att_matrix_init` function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_SAT_ATT_MATRIX_INIT_MEMORY_ERR	0

---

### 7.15.7 Runtime Performances

The following runtime performances have been measured.

*Table 57: Runtime performances of xp\_sat\_att\_matrix\_init*

Ultra Sparc II-400 [ms]
TBD

## 7.16 xp\_sat\_att\_init\_harmonic

### 7.16.1 Overview

The **xp\_sat\_att\_init\_harmonic** CFI function initialises the satellite nominal orbital to satellite attitude mispointing angles for a given satellite with a user-provided set of values. The initialised values will be stored in the *sat\_trans\_id* output structure.

The *xp\_attitude* and *xp\_change\_frame* functions will then compute the values as follows:

$$\begin{aligned} \text{attitudeangle} = & \text{bias} + 1\text{stsincoef} \cdot \sin\left(\frac{\text{angle} \cdot 2\pi}{360}\right) + 1\text{stcoscoef} \cdot \cos\left(\frac{\text{angle} \cdot 2\pi}{360}\right) \\ & + 2\text{ndsinecoef} \cdot \sin\left(\frac{2 \cdot \text{angle} \cdot 2\pi}{360}\right) + 2\text{ndcoscoef} \cdot \cos\left(\frac{2 \cdot \text{angle} \cdot 2\pi}{360}\right) \\ & + 3\text{rdsinecoef} \cdot \sin\left(\frac{3 \cdot \text{angle} \cdot 2\pi}{360}\right) + 3\text{rdcoscoef} \cdot \cos\left(\frac{3 \cdot \text{angle} \cdot 2\pi}{360}\right) \\ & + \dots \end{aligned}$$

### 7.16.2 Calling Interface

The calling interface of the **xp\_sat\_att\_init\_harmonic** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long angle_type, num_terms[3];
    long harmonic_type_pitch[XP_MAX_NUM_HARMONIC],
        harmonic_type_roll[XP_MAX_NUM_HARMONIC],
        harmonic_type_yaw[XP_MAX_NUM_HARMONIC];
    double harmonic_coef_pitch[XP_MAX_NUM_HARMONIC],
        harmonic_coef_roll[XP_MAX_NUM_HARMONIC],
        harmonic_coef_yaw[XP_MAX_NUM_HARMONIC];
    xp_sat_trans_id sat_trans_id = {NULL};
    long ierr[XP_NUM_ERR_SAT_ATT_INIT_HARMONIC], status;

    status = xp_sat_att_init_harmonic(&angle_type, num_terms,
                                     harmonic_type_pitch,
                                     harmonic_type_roll,
                                     harmonic_type_yaw,
                                     harmonic_coef_pitch,
                                     harmonic_coef_roll,
```

```

                                harmonic_coef_yaw,
                                &sat_trans_id, ierr);
}

```

The XP\_NUM\_ERR\_SAT\_ATT\_INIT\_HARMONIC and XP\_MAX\_NUM\_HARMONIC constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```

#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ANGLE_TYPE, NUM_TERMS(3)
    INTEGER*4 HARMONIC_TYPE_PITCH(XP_MAX_NUM_HARMONIC),
&            HARMONIC_TYPE_ROLL(XP_MAX_NUM_HARMONIC),
&            HARMONIC_TYPE_YAW(XP_MAX_NUM_HARMONIC)
    REAL*8 HARMONIC_COEF_PITCH(XP_MAX_NUM_HARMONIC),
&         HARMONIC_COEF_ROLL(XP_MAX_NUM_HARMONIC),
&         HARMONIC_COEF_YAW(XP_MAX_NUM_HARMONIC)
    INTEGER*4 IERR(XP_NUM_ERR_SAT_ATT_INIT_HARMONIC),
&           STATUS

    STATUS = XP_SAT_ATT_INIT_HARMONIC(SAT_ID, ANGLE_TYPE,
&                                     NUM_TERMS, HARMONIC_TYPE_PITCH,
&                                     HARMONIC_TYPE_ROLL, HARMONIC_TYPE_YAW,
&                                     HARMONIC_COEF_PITCH, HARMONIC_COEF_ROLL,
&                                     HARMONIC_COEF_YAW, IERR)

```

### 7.16.3 Input Parameters

The `xp_sat_att_init_harmonic` CFI function has the following input parameters:

Table 58: Input parameters of `xp_sat_att_init_harmonic` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>angle_type</code>	<code>long *</code>	-	Type of angle	-	XP_ANGLE_TYP E_TRUE_LAT_T OD XP_ANGLE_TYP E_MEAN_LAT_T OD
<code>num_terms[3]</code>	<code>long</code>	[0]	Number of elements used in vectors <code>harmonic_type_pitch</code> and <code>harmonic_coef_pitch</code>	-	$\geq 0$
		[1]	Number of elements used in vectors <code>harmonic_type_roll</code> and <code>harmonic_coef_roll</code>	-	$\geq 0$
		[2]	Number of elements used in vectors <code>harmonic_type_yaw</code> and <code>harmonic_coef_yaw</code>	-	$\geq 0$
<code>harmonic_type_pitch</code>	<code>long[XP_MAX_NUM_HARMONIC]</code>	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	
<code>harmonic_type_roll</code>	<code>long[XP_MAX_NUM_HARMONIC]</code>	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	-
<code>harmonic_type_yaw</code>	<code>long[XP_MAX_NUM_HARMONIC]</code>	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	-

*Table 58: Input parameters of xp\_sat\_att\_init\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
harmonic_coef_pitch	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the pitch angle	deg	
harmonic_coef_roll	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the roll angle	deg	
harmonic_coef_yaw	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the yaw angle	deg	

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Angle Type: See current document, table 3.

### 7.16.4 Output Parameters

The output parameters of the `xp_sat_att_init_harmonic` CFI function are:

*Table 59: Output parameters of xp\_sat\_att\_init\_harmonic*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id*	-	Structure that contains the Satellite Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.16.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_att_init_harmonic` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_att_init_harmonic` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM])

*Table 60: Error messages of xp\_sat\_att\_init\_harmonic function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Memory allocation error	No calculation performed	XP_CFI_SAT_ATT_INIT_HARMONIC_MEMORY_ERR	0

### **7.16.6 Runtime Performances**

The following runtime performances have been measured.

*Table 61: Runtime performances of xp\_sat\_att\_init\_harmonic*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.17 xp\_sat\_att\_init\_file

### 7.17.1 Overview

The **xp\_sat\_att\_init\_file** CFI function initialises the satellite attitude angles for a given satellite reading values from the attitude file(s). The validity time or orbital range for the attitude angles can be specified by the user. The initialised values will be stored in the *sat\_trans\_id* output structure.

### 7.17.2 Calling Interface

The calling interface of the **xp\_sat\_att\_init\_file** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xl_time_id time_id = {NULL};
    long n_files, time_init_mode, time_ref;
    char **attitude_file *auxiliary_file;
    double time0, time1;
    double val_time0, val_time1;
    xp_sat_trans_id sat_trans_id = {NULL};
    long ierr[XP_NUM_ERR_SAT_ATT_INIT_FILE], status;

    status = xp_sat_att_init_file(&time_id, &n_files,
        attitude_file, &auxiliary_file,
        time_init_mode, &time_ref, &time0, &time1,
        &val_time0, &val_time1, &sat_trans_id, ierr);
}
```

The `XP_NUM_ERR_SAT_ATT_INIT_FILE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, N_FILES, TIME_INIT_MODE, TIME_REF
    INTEGER*4 ORBIT0, ORBIT1
    CHARACTER*LENGTH_NAME ATTITUDE_FILE(NUM_FILES), AUXILIARY_FILE
    REAL*8 TIME0, TIME1
    INTEGER*4 IERR(XP_NUM_ERR_SAT_ATT_INIT_FILE), STATUS

    STATUS = XP_SAT_ATT_INIT_FILE(SAT_ID, N_FILES,
&        ATTITUDE_FILE, AUXILIARY_FILE, TIME_INIT_MODE,
```



& TIME\_REF, TIME0, TIME1,  
 & ORBIT0, ORBIT1, IERR)

### 7.17.3 Input Parameters

The `xp_sat_att_init_file` CFI function has the following input parameters:

Table 62: Input parameters of `xp_sat_att_init_file` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
time_id	xl_time_id*	-	Structure that contains the time correlations.	-	-
n_files	long *	-	Number of reference data files	-	> 0
attitude_file	char **	-	<p>Filenames of the reference data files. In case multiple files are used, the files should be time ordered.</p> <p>The supported Attitude File formats are the Generic Attitude File as described in APPENDIX C and Star Tracker files.</p> <p>If multiple files are used, Generic Attitude Files and Star Tracker files cannot be given to the function as part of the same list.</p> <p>When using Star-Tracker files, the function assumes that all the input files belong to the same Star-Tracker. As a consequence of this assumption only the Star-Tracker identifier of the first file provided in the list is read. Note that the Star-Tracker identification number should be either 1, 2 or 3 (no internal check is performed)</p>	-	-
auxiliary_file	char **	-	Filename of an auxiliary file containing the Star-Tracker misalignment matrices (the format must be the same as the attitude file given in function <code>xp_instr_att_init_file</code> )	-	-
time_init_mode	long *	-	Flag for selecting the time range of the initialisation.	-	Select either: · XP_SEL_TIME · XP_SEL_FILE
time_ref	long *	-	Time reference ID	-	Complete
time0	double*	-	If: <code>time_init_mode=XP_SEL_TIME</code> Start of the time range defined by [time0,time1]	Decimal days (Processing format)	[-18262.0,36524.0]

*Table 62: Input parameters of xp\_sat\_att\_init\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
time1	double*	-	If: <i>time_init_mode=XP_SEL_TIME</i> End of the time range defined by [time0,time1]	Decimal days (Processing format)	[-18262.0,36524.0] > time0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Time Reference ID: *time\_ref*. See [GEN\_SUM].
- Time Init Mode ID: *time\_init\_mode*. See current document, table 3.

### 7.17.4 Output Parameters

The output parameters of the *xp\_sat\_att\_init\_file* CFI function are:

*Table 63: Output parameters of xp\_sat\_att\_init\_file*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
val_time0	double*	-	Validity start time of the initialization	Decimal days (Processing format)	[-18262.0,36524.0]
val_time1	double*	-	Validity end time of the initialization	Decimal days (Processing format)	[-18262.0,36524.0]
sat_trans_id	xp_sat_trans_id*	-	Structure that contains the Satellite Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.17.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the *xp\_sat\_att\_init\_file* CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library *xp\_get\_msg* (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the *xp\_sat\_att\_init\_file* function by calling the function of the EXPLORER\_POINTING software library *xp\_get\_code* (see [GEN\_SUM]).

*Table 64: Error messages of xp\_sat\_att\_init\_file function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_SAT_ATT_INIT_FILE_MEMORY_ERR	0
ERR	Error reading input files	No calculation performed	XP_CFI_SAT_ATT_INIT_FILE_READ_FILES_ERR	1
ERR	No data has been read from the files	No calculation performed	XP_CFI_SAT_ATT_INIT_FILE_NO_READ_DATA_ERR	2
ERR	Error reading auxiliary file	No calculation performed	XP_CFI_SAT_ATT_INIT_FILE_READ_AUX_FILE_ERR	3
ERR	Wrong input time reference	No calculation performed	XP_CFI_SAT_ATT_INIT_FILE_WRONG_TIME_REF_ERR	4
ERR	Could not perform a time transformation	No calculation performed	XP_CFI_SAT_ATT_INIT_FILE_TIME_REF_ERR	5
ERR	Could not find word \"SPH_DESCRIPTOR\" in attitude file	No calculation performed	XP_CFI_SAT_ATT_INIT_FILE_READ_STR_ID_ERR	6

### 7.17.6 Runtime Performances

The following runtime performances have been measured.

*Table 65: Runtime performances of xp\_sat\_att\_init\_file*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.18 xp\_sat\_att\_close

### 7.18.1 Overview

The **xp\_sat\_att\_close** CFI function cleans up any memory allocation performed by the satellite attitude initialization functions.

### 7.18.2 Calling Interface

The calling interface of the **xp\_sat\_att\_close** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_sat_trans_id sat_trans_id = {NULL};
    long ierr[XP_NUM_ERR_SAT_ATT_CLOSE], status;

    status = xp_sat_att_close(&sat_trans_id, ierr);
}
```

The `XP_NUM_ERR_SAT_ATT_CLOSE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID
    INTEGER*4 IERR(XP_NUM_ERR_SAT_ATT_CLOSE), STATUS

    STATUS = XP_SAT_ATT_CLOSE(SAT_ID, IERR)
```

### 7.18.3 Input Parameters

The `xp_sat_att_close` CFI function has the following input parameters:

*Table 66: Input parameters of xp\_sat\_att\_close function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id*	-	Structure that contains the Sat. Trans.	-	-

### 7.18.4 Output Parameters

The output parameters of the `xp_sat_att_close` CFI function are:

*Table 67: Output parameters of xp\_sat\_att\_close*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ierr	long	-	Error vector	-	-

### 7.18.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_sat_att_close` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_sat_att_close` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 68: Error messages of xp\_sat\_att\_close function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Could not close the Id. as it is not initialized or it is being used	No calculation performed	XP_CFI_SAT_ATT_CLOSE_WRONG_ID_ERR	0

---

### ***7.18.6 Runtime Performances***

The following runtime performances have been measured.

*Table 69: Runtime performances of xp\_sat\_att\_close*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.19 xp\_sat\_att\_get\_angles

### 7.19.1 Overview

The `xp_sat_att_get_angles` CFI function returns angle data used for the satellite attitude initialization.

### 7.19.2 Calling interface

The calling interface of the `xp_sat_att_get_angles` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_trans_id sat_trans_id;
    long status;
    xp_angle_model_str data;
    status = xp_sat_att_get_angles (&sat_trans_id,
                                   &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.19.3 Input parameters

The `xp_sat_att_get_angles` CFI function has the following input parameters:

*Table 70: Input parameters of xp\_sat\_att\_get\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID.	-	-

### 7.19.4 Output parameters

The output parameters of the `xp_sat_att_get_angles` CFI function are:

*Table 71: Output parameters of xp\_sat\_att\_get\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_att_get_angles	long	-	Status flag	-	-

*Table 71: Output parameters of xp\_sat\_att\_get\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
data	xp_angle_model_str	-	Attitude initialization data	-	-

### 7.19.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_trans\_id was not initialised.
- The sat\_trans\_id initialisation does not allow the use of this function.

### 7.19.6 Runtime performances

The following runtime performances have been estimated.

*Table 72: Runtime performances of xp\_sat\_att\_get\_angles function*

<b>Ultra Sparc II-400 [ms]</b>
TBD



## 7.20 xp\_sat\_att\_set\_angles

### 7.20.1 Overview

The `xp_sat_att_set_angles` CFI function changes the harmonic data used for the satellite attitude initialization.

### 7.20.2 Calling interface

The calling interface of the `xp_sat_att_set_angles` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_trans_id sat_trans_id;
    long status;
    xp_angle_model_str data;
    status = xp_sat_att_set_angles (&sat_trans_id,
                                   &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.20.3 Input parameters

The `xp_sat_att_set_angles` CFI function has the following input parameters:

*Table 73: Input parameters of xp\_sat\_att\_set\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID (input / output parameter)	-	-
data	xp_angle_model_str	-	Attitude initialization data	-	-

### 7.20.4 Output parameters

The output parameters of the `xp_sat_att_set_angles` CFI function are:

*Table 74: Output parameters of xp\_sat\_att\_set\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_att_set_angles	long	-	Status flag	-	-
sat_trans_id	xp_sat_trans_id*	-	Satellite transformation ID (input / output parameter)	-	-

### 7.20.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_trans\_id was not initialised.
- The sat\_trans\_id initialisation does not allow the use of this function.

### 7.20.6 Runtime performances

The following runtime performances have been estimated.

*Table 75: Runtime performances of xp\_sat\_att\_set\_angles function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.21 xp\_sat\_att\_get\_matrix

### 7.21.1 Overview

The `xp_sat_att_get_matrix` CFI function returns the matrix data used for the satellite attitude initialization.

### 7.21.2 Calling interface

The calling interface of the `xp_sat_att_get_matrix` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_trans_id sat_trans_id;
    long status;
    xp_matrix_model_str data;
    status = xp_sat_att_get_matrix (&sat_trans_id,
                                   &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.21.3 Input parameters

The `xp_sat_att_get_matrix` CFI function has the following input parameters:

*Table 76: Input parameters of xp\_sat\_att\_get\_matrix function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID.	-	-

### 7.21.4 Output parameters

The output parameters of the `xp_sat_att_get_matrix` CFI function are:

*Table 77: Output parameters of xp\_sat\_att\_get\_matrix function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_att_get_matrix	long	-	Status flag	-	-
data	xp_matrix_mode_l_str	-	Attitude initialization data	-	-

### 7.21.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_trans\_id was not initialised.
- The sat\_trans\_id initialisation does not allow the use of this function.

### 7.21.6 Runtime performances

The following runtime performances have been estimated.

*Table 78: Runtime performances of xp\_sat\_att\_get\_matrix function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.22 xp\_sat\_att\_set\_matrix

### 7.22.1 Overview

The **xp\_sat\_att\_set\_matrix** CFI function changes matrix data used for the satellite attitude initialization.

### 7.22.2 Calling interface

The calling interface of the **xp\_sat\_att\_set\_matrix** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_trans_id sat_trans_id;
    long status;
    xp_matrix_model_str data;
    status = xp_sat_att_set_matrix (&sat_trans_id,
                                   &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.22.3 Input parameters

The **xp\_sat\_att\_set\_matrix** CFI function has the following input parameters:

*Table 79: Input parameters of xp\_sat\_att\_set\_matrix function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID (input / output parameter)	-	-
data	xp_angle_model_str	-	Attitude initialization data	-	-

### 7.22.4 Output parameters

The output parameters of the **xp\_sat\_att\_set\_matrix** CFI function are:

*Table 80: Output parameters of xp\_sat\_att\_set\_matrix function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_att_set_matrix	long	-	Status flag	-	-
sat_trans_id	xp_sat_trans_id*	-	Satellite transformation ID (input / output parameter)	-	-

### 7.22.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_trans\_id was not initialised.
- The sat\_trans\_id initialisation does not allow the use of this function.

### 7.22.6 Runtime performances

The following runtime performances have been estimated.

*Table 81: Runtime performances of xp\_sat\_att\_set\_matrix function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.23 xp\_sat\_att\_get\_harmonic

### 7.23.1 Overview

The **xp\_sat\_att\_get\_harmonic** CFI function returns harmonic data used for the satellite attitude initialization.

### 7.23.2 Calling interface

The calling interface of the **xp\_sat\_att\_get\_harmonic** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_trans_id sat_trans_id;
    long status;
    xp_harmonic_model_str data;
    status = xp_sat_att_get_harmonic (&sat_trans_id,
                                     &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.23.3 Input parameters

The **xp\_sat\_att\_get\_harmonic** CFI function has the following input parameters:

*Table 82: Input parameters of xp\_sat\_att\_get\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID.	-	-

### 7.23.4 Output parameters

The output parameters of the **xp\_sat\_att\_get\_harmonic** CFI function are:

*Table 83: Output parameters of xp\_sat\_att\_get\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_att_get_harmonic	long	-	Status flag	-	-
data	xp_harmonic_model_str	-	Attitude initialization data	-	-

### 7.23.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_trans\_id was not initialised.
- The sat\_trans\_id initialisation does not allow the use of this function.

### 7.23.6 Runtime performances

The following runtime performances have been estimated.

*Table 84: Runtime performances of xp\_sat\_att\_get\_harmonic function*

<b>Ultra Sparc II-400 [ms]</b>
TBD



## 7.24 xp\_sat\_att\_set\_harmonic

### 7.24.1 Overview

The **xp\_sat\_att\_set\_harmonic** CFI function changes the harmonic data used for the satellite attitude initialization.

### 7.24.2 Calling interface

The calling interface of the **xp\_sat\_att\_set\_harmonic** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_trans_id sat_trans_id;
    long status;
    xp_harmonic_model_str data;
    status = xp_sat_att_set_harmonic (&sat_trans_id,
                                     &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.24.3 Input parameters

The **xp\_sat\_att\_set\_harmonic** CFI function has the following input parameters:

*Table 85: Input parameters of xp\_sat\_att\_set\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID (input / output parameter)	-	-
data	xp_harmonic_model_str	-	Attitude initialization data	-	-

### 7.24.4 Output parameters

The output parameters of the **xp\_sat\_att\_set\_harmonic** CFI function are:

*Table 86: Output parameters of xp\_sat\_att\_set\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_att_set_harmonic	long	-	Status flag	-	-
sat_trans_id	xp_sat_trans_id*	-	Satellite transformation ID (input / output parameter)	-	-

### 7.24.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_trans\_id was not initialised.
- The sat\_trans\_id initialisation does not allow the use of this function.

### 7.24.6 Runtime performances

The following runtime performances have been estimated.

*Table 87: Runtime performances of xp\_sat\_att\_set\_harmonic function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.25 xp\_sat\_att\_get\_file

### 7.25.1 Overview

The **xp\_sat\_att\_get\_file** CFI function returns satellite attitude data from the satellite attitude Id. that was initialized with a file.

### 7.25.2 Calling interface

The calling interface of the **xp\_sat\_att\_get\_file** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_trans_id sat_trans_id;
    long status;
    xp_sat_att_file_model_str data;
    status = xp_sat_att_get_file (&sat_trans_id,
                                &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the #include statement):

TBD

### 7.25.3 Input parameters

The **xp\_sat\_att\_get\_file** CFI function has the following input parameters:

*Table 88: Input parameters of xp\_sat\_att\_get\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID.	-	-

### 7.25.4 Output parameters

The output parameters of the **xp\_sat\_att\_get\_file** CFI function are:

*Table 89: Output parameters of xp\_sat\_att\_get\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_att_get_file	long	-	Status flag	-	-
data	xp_sat_att_file_model_str	-	Attitude initialization data	-	-

### 7.25.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_trans\_id was not initialised.
- The sat\_trans\_id initialisation does not allow the use of this function.

### 7.25.6 Runtime performances

The following runtime performances have been estimated.

*Table 90: Runtime performances of xp\_sat\_att\_get\_file function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.26 xp\_sat\_att\_set\_file

### 7.26.1 Overview

The **xp\_sat\_att\_set\_file** CFI function changes the initialization data in the satellite attitude Id. when it was initialised with a file.

### 7.26.2 Calling interface

The calling interface of the **xp\_sat\_att\_set\_file** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_sat_trans_id sat_trans_id;
    long status;
    xp_sat_att_file_model_str data;
    status = xp_sat_att_set_file (&sat_trans_id,
                                &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the #include statement):

TBD

### 7.26.3 Input parameters

The **xp\_sat\_att\_set\_file** CFI function has the following input parameters:

*Table 91: Input parameters of xp\_sat\_att\_set\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID (input / output parameter)	-	-
data	xp_sat_att_file_model_str	-	Attitude initialization data	-	-

### 7.26.4 Output parameters

The output parameters of the **xp\_sat\_att\_set\_file** CFI function are:

*Table 92: Output parameters of xp\_sat\_att\_set\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_sat_att_set_file	long	-	Status flag	-	-
sat_trans_id	xp_sat_trans_id *	-	Satellite transformation ID (input / output parameter)	-	-

### 7.26.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The sat\_trans\_id was not initialised.
- The sat\_trans\_id initialisation does not allow the use of this function.

### 7.26.6 Runtime performances

The following runtime performances have been estimated.

*Table 93: Runtime performances of xp\_sat\_att\_set\_file function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.27 xp\_instr\_att\_angle\_init

### 7.27.1 Overview

The **xp\_instr\_att\_angle\_init** CFI function initialises the instrument attitude mispointing angles for a given satellite and instrument with a user-provided set of values. The initialised values will be stored in the *instr\_trans\_id* output structure.

### 7.27.2 Calling Interface

The calling interface of the **xp\_instr\_att\_angle\_init** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    double ang[3], offset[3];
    xp_instr_trans_id instr_trans_id = {NULL};
    long ierr[XP_NUM_ERR_INSTR_ATT_ANGLE_INIT], status;

    status = xp_instr_att_angle_init(ang, offset,
                                    &instr_trans_id, ierr);
}
```

The `XP_NUM_ERR_INSTR_ATT_ANGLE_INIT` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, INSTRUMENT_ID
    REAL*8 ANG(3), OFFSET(3)
    INTEGER*4 IERR(XP_NUM_ERR_INSTR_ATT_ANGLE_INIT), STATUS

    STATUS = XP_INSTR_ATT_ANGLE_INIT(SAT_ID, INSTRUMENT_ID, ANG,
    &                                OFFSET, IERR)
```

### 7.27.3 Input Parameters

The `xp_instr_att_angle_init` CFI function has the following input parameters:

*Table 94: Input parameters of `xp_instr_att_angle_init` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ang	double[3]	[0]	Pitch mispointing angle (Satellite Attitude Frame)	deg	If no better value, assume 0.0
		[1]	Roll mispointing angle (Satellite Attitude Frame)	deg	If no better value, assume 0.0
		[2]	Yaw mispointing angle (Satellite Attitude Frame)	deg	If no better value, assume 0.0
offset	double[3]	all	Instrument Frame Origin position vector (Satellite Attitude Frame)	m	-

### 7.27.4 Output Parameters

The output parameters of the `xp_instr_att_angle_init` CFI function are:

*Table 95: Output parameters of `xp_instr_att_angle_init`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Structure that contains the Instrument Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.27.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_instr_att_angle_init` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_instr_att_angle_init` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).



*Table 96: Error messages of xp\_instr\_att\_angle\_init function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_INSTR_ATT_ANGLE_INIT_MEMORY_ERR	0

### **7.27.6 Runtime Performances**

The following runtime performances have been measured.

*Table 97: Runtime performances of xp\_instr\_att\_angle\_init*

Ultra Sparc II-400 [ms]
TBD

## 7.28 xp\_instr\_att\_matrix\_init

### 7.28.1 Overview

The **xp\_instr\_att\_matrix\_init** CFI function initialises the instrument attitude mispointing angles for a given satellite and instrument with a user-provided matrix. The initialised values will be stored in the *instr\_trans\_id* output structure.

### 7.28.2 Calling Interface

The calling interface of the **xp\_instr\_att\_matrix\_init** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    double att_matrix[3][3], offset[3];
    xp_instr_trans_id instr_trans_id = {NULL};
    long ierr[XP_NUM_ERR_INSTR_ATT_MATRIX_INIT], status;

    status = xp_instr_att_matrix_init(att_matrix, offset,
                                     &instr_trans_id, ierr);
}
```

The `XP_NUM_ERR_INSTR_ATT_MATRIX_INIT` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, INSTRUMENT_ID
    REAL*8 ATT_MATRIX(3,3), OFFSET(3)
    INTEGER*4 IERR(XP_NUM_ERR_INSTR_ATT_MATRIX_INIT), STATUS

    STATUS = XP_INSTR_ATT_MATRIX_INIT(SAT_ID, INSTRUMENT_ID,
    & ATT_MATRIX, OFFSET, IERR)
```

Note: The matrices are handled differently in C and in Fortran programs. Details TBW.

### 7.28.3 Input Parameters

The `xp_instr_att_matrix_init` CFI function has the following input parameters:

Table 98: Input parameters of `xp_instr_att_matrix_init` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
att_matrix	double[3][3]	all	Mispointing Matrix	-	-
offset	double[3]	all	Instrument Frame Origin position vector (Satellite Attitude Frame)	m	-

### 7.28.4 Output Parameters

The output parameters of the `xp_instr_att_matrix_init` CFI function are:

Table 99: Output parameters of `xp_instr_att_matrix_init`

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Structure that contains the Instrument Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.28.5 Example

TBD

### 7.28.6 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_instr_att_matrix_init` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_instr_att_matrix_init` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM])

*Table 100: Error messages of xp\_instr\_att\_matrix\_init function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Memory allocation error	No calculation performed	XP_CFI_INSTR_ATT_MATRIX_INIT_MEMORY_ERR	0

### **7.28.7 Runtime Performances**

The following runtime performances have been measured.

*Table 101: Runtime performances of xp\_instr\_att\_matrix\_init*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.29 xp\_instr\_att\_init\_harmonic

### 7.29.1 Overview

The **xp\_instr\_att\_init\_harmonic** CFI function initialises the instrument attitude mispointing angles for a given satellite and instrument with a user-provided set of values. The initialised values will be stored in the *instr\_trans\_id* output structure.

The *xp\_attitude* and *xp\_change\_frame* functions will then compute the values as follows:

$$\begin{aligned}
 \text{attitudeangle} = & \text{bias} + 1\text{stsincoef} \cdot \sin\left(\frac{\text{angle} \cdot 2\pi}{360}\right) + 1\text{stcoscoef} \cdot \cos\left(\frac{\text{angle} \cdot 2\pi}{360}\right) \\
 & + 2\text{ndsinccoef} \cdot \sin\left(\frac{2 \cdot \text{angle} \cdot 2\pi}{360}\right) + 2\text{ndcoscoef} \cdot \cos\left(\frac{2 \cdot \text{angle} \cdot 2\pi}{360}\right) \\
 & + 3\text{rdsinccoef} \cdot \sin\left(\frac{3 \cdot \text{angle} \cdot 2\pi}{360}\right) + 3\text{rdcoscoef} \cdot \cos\left(\frac{3 \cdot \text{angle} \cdot 2\pi}{360}\right) \\
 & + \dots
 \end{aligned}$$

### 7.29.2 Calling Interface

The calling interface of the **xp\_instr\_att\_init\_harmonic** CFI function is the following (input parameters are underlined):

```

#include <explorer_pointing.h>
{
    long angle_type, num_terms[3];
    long harmonic_type_pitch[XP_MAX_NUM_HARMONIC],
        harmonic_type_roll[XP_MAX_NUM_HARMONIC],
        harmonic_type_yaw[XP_MAX_NUM_HARMONIC];
    double harmonic_coef_pitch[XP_MAX_NUM_HARMONIC],
        harmonic_coef_roll[XP_MAX_NUM_HARMONIC],
        harmonic_coef_yaw[XP_MAX_NUM_HARMONIC];
    double offset[3];
    xp_instr_trans_id instr_trans_id = {NULL};
    long ierr[XP_NUM_ERR_INSTR_ATT_INIT_HARMONIC], status;

    status = xp_instr_att_init_harmonic(&angle_type, num_terms,
                                        harmonic_type_pitch,
                                        harmonic_type_roll,
                                        harmonic_type_yaw,
                                        harmonic_coef_pitch,

```

```

        harmonic_coef_roll,
        harmonic_coef_yaw,
        offset,
        &instr_trans_id, ierr);
}

```

The XP\_NUM\_ERR\_INSTR\_ATT\_INIT\_HARMONIC and XP\_MAX\_NUM\_HARMONIC constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```

#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ANGLE_TYPE, NUM_TERMS(3)
    INTEGER*4 HARMONIC_TYPE_PITCH(XP_MAX_NUM_HARMONIC),
&            HARMONIC_TYPE_ROLL(XP_MAX_NUM_HARMONIC),
&            HARMONIC_TYPE_YAW(XP_MAX_NUM_HARMONIC)
    REAL*8 HARMONIC_COEF_PITCH(XP_MAX_NUM_HARMONIC),
&         HARMONIC_COEF_ROLL(XP_MAX_NUM_HARMONIC),
&         HARMONIC_COEF_YAW(XP_MAX_NUM_HARMONIC)
    INTEGER*4 IERR(XP_NUM_ERR_INSTR_ATT_INIT_HARMONIC),
&           STATUS

    STATUS = XP_INSTR_ATT_INIT_HARMONIC(SAT_ID, INSTRUMENT_ID,
&                                     ANGLE_TYPE,
&                                     NUM_TERMS, HARMONIC_TYPE_PITCH,
&                                     HARMONIC_TYPE_ROLL, HARMONIC_TYPE_YAW,
&                                     HARMONIC_COEF_PITCH, HARMONIC_COEF_ROLL,
&                                     HARMONIC_COEF_YAW, IERR)

```

### 7.29.3 Input Parameters

The `xp_instr_att_init_harmonic` CFI function has the following input parameters:

Table 102: Input parameters of `xp_instr_att_init_harmonic` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
angle_type	long *	-	Type of angle	-	XP_ANGLE_TYP E_TRUE_LAT_T OD XP_ANGLE_TYP E_MEAN_LAT_T OD
num_terms[3]	long	[0]	Number of elements used in vectors harmonic_type_pitch and harmonic_coef_pitch	-	>=0
		[1]	Number of elements used in vectors harmonic_type_roll and harmonic_coef_roll	-	>=0
		[2]	Number of elements used in vectors harmonic_type_yaw and harmonic_coef_yaw	-	>=0
harmonic_type_pitch	long[XP_M X_NUM_HA RMONIC]	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	
harmonic_type_roll	long[XP_M X_NUM_HA RMONIC]	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	-
harmonic_type_yaw	long[XP_M X_NUM_HA RMONIC]	all	Type of coefficients: =0 for the bias parameter <0 for the sinus coefficients (-n means that corresponds to the sinus coefficient of order n) >0 for the cosinus coefficients (+n means that corresponds to the cosinus coefficient of order n)	-	-

*Table 102: Input parameters of xp\_instr\_att\_init\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
harmonic_coef_pitch	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the pitch angle	deg	
harmonic_coef_roll	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the roll angle	deg	
harmonic_coef_yaw	double[XP_MAX_NUM_HARMONIC]	all	Bias, sinus and cosinus coefficients for the yaw angle	deg	
offset	double[3]	all	Instrument Frame Origin position vector (Satellite Attitude Frame)	m	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Angle Type: See current document, table 3.

### 7.29.4 Output Parameters

The output parameters of the `xp_instr_att_init_harmonic` CFI function are:

*Table 103: Output parameters of xp\_instr\_att\_init\_harmonic*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Structure that contains the Instrument Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.29.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_instr_att_init_harmonic` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_instr_att_init_harmonic` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).



*Table 104: Error messages of xp\_instr\_att\_init\_harmonic function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Memory allocation error	No calculation performed	XP_CFI_INSTR_ATT_INIT_HARMONIC_MEMORY_ERR	0

### **7.29.6 Runtime Performances**

The following runtime performances have been measured.

*Table 105: Runtime performances of xp\_instr\_att\_init\_harmonic*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.30 xp\_instr\_att\_init\_file

### 7.30.1 Overview

The **xp\_instr\_att\_init\_file** CFI function initialises the instrument attitude mispointing angles for a given satellite reading values from the attitude file(s). The validity time or orbital range for the attitude angles can be specified by the user. The initialised values will be kept in memory and used by other CFI functions.

### 7.30.2 Calling Interface

The calling interface of the **xp\_instr\_att\_init\_file** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xl_time_id time_id = {NULL};
    long n_files, time_init_mode, time_ref;
    char **instrument_file;
    double time0, time1;
    double val_time0, val_time1;
    xp_instr_trans_id instr_trans_id = {NULL};
    long ierr[XP_NUM_ERR_INSTR_ATT_INIT_FILE], status;

    status = xp_instr_att_init_file(&time_id,
                                   &n_files, instrument_file,
                                   &time_init_mode, &time_ref, &time0, &time1,
                                   &val_time0, &val_time1, &instr_trans_id, ierr);
}
```

The `XP_NUM_ERR_INSTR_ATT_INIT_FILE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, INSTRUMENT_ID, N_FILES, TIME_INIT_MODE, &
&    TIME_REF, ORBIT0, ORBIT1
    CHARACTER*LENGTH_NAME INSTRUMENT_FILE(NUM_FILES)
    REAL*8 TIME0, TIME1
    INTEGER*4 IERR(XP_NUM_ERR_INSTR_ATT_INIT_FILE), STATUS
    STATUS = XP_INSTR_ATT_INIT_FILE(SAT_ID, INSTRUMENT_ID, N_FILES,
&    INSTRUMENT_FILE, TIME_INIT_MODE, TIME_REF, TIME0, TIME1,
&    ORBIT0, ORBIT1, IERR)
```

### 7.30.3 Input Parameters

The `xp_instr_att_init_file` CFI function has the following input parameters:

*Table 106: Input parameters of `xp_instr_att_init_file` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
time_id	xl_time_id*	-	Structure that contains the time correlations.	-	-
n_files	long *	-	Number of reference data files	-	> 0
instrument_file	char **	-	Filenames of the reference data files. In case multiple files are used, the files should be time ordered. The supported Attitude File format is the Generic Attitude File as described in APPENDIX C	-	-
time_init_mode	long *	-	Flag for selecting the time range of the initialisation.	-	Select either: · XP_SEL_TIME · XP_SEL_FILE
time_ref	long *	-	Time reference ID	-	Complete
time0	double*	-	If: <code>time_init_mode=XP_SEL_TIME</code> Start of the time range defined by [time0,time1]	Decimal days (Processing format)	[-18262.0,36524.0]
time1	double*	-	If: <code>time_init_mode=XP_SEL_TIME</code> End of the time range defined by [time0,time1]	Decimal days (Processing format)	[-18262.0,36524.0] > time0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Time Reference ID: `time_ref`. See [GEN\_SUM].
- Time Init Mode ID: `time_init_mode`. See current document, table 3.

### 7.30.4 Output Parameters

The output parameters of the `xp_instr_att_init_file` CFI function are:

*Table 107: Output parameters of `xp_instr_att_init_file`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
val_time0	double*	-	Validity start time of the initialization	Decimal days (Processing format)	[-18262.0,36524.0]
val_time1	double*	-	Validity end time of the initialization	Decimal days (Processing format)	[-18262.0,36524.0]

*Table 107: Output parameters of xp\_instr\_att\_init\_file*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Structure that contains the Instrument Transformation	-	-
ierr	long	-	Error vector	-	-

### 7.30.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_instr\_att\_init\_file** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_instr\_att\_init\_file** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 108: Error messages of xp\_instr\_att\_init\_file function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_INSTR_ATT_INIT_FILE_MEMORY_ERR	0
ERR	Wrong input time reference	No calculation performed	XP_CFI_INSTR_ATT_INIT_FILE_WRONG_TIME_REF_ERR	1

### 7.30.6 Runtime Performances

The following runtime performances have been measured.

*Table 109: Runtime performances of xp\_instr\_att\_init\_file*

Ultra Sparc II-400 [ms]
TBD

## 7.31 xp\_instr\_att\_close

### 7.31.1 Overview

The **xp\_instr\_att\_close** CFI function cleans up any memory allocation performed by the instrument attitude initialization functions.

### 7.31.2 Calling Interface

The calling interface of the **xp\_instr\_att\_close** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_instr_trans_id instr_trans_id = {NULL};
    long ierr[XP_NUM_ERR_INSTR_ATT_CLOSE], status;

    status = xp_instr_att_close(&instr_trans_id, ierr);
}
```

The `XP_NUM_ERR_INSTR_ATT_CLOSE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
INTEGER*4 SAT_ID, INSTRUMENT_ID
INTEGER*4 IERR(XP_NUM_ERR_INSTR_ATT_CLOSE), STATUS

STATUS = XP_INSTR_ATT_CLOSE(SAT_ID, INSTRUMENT_ID, IERR)
```

### 7.31.3 Input Parameters

The `xp_instr_att_close` CFI function has the following input parameters:

*Table 110: Input parameters of `xp_instr_att_close` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>instr_trans_id</code>	<code>xp_instr_trans_id*</code>	-	Structure that contains the Instr. Trans.	-	-

### 7.31.4 Output Parameters

The output parameters of the `xp_instr_att_close` CFI function are:

*Table 111: Output parameters of `xp_instr_att_close`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>ierr</code>	<code>long</code>	-	Error vector	-	-

### 7.31.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_instr_att_close` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_instr_att_close` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 112: Error messages of `xp_instr_att_close` function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Could not close the Id. as it is not initialized or it is being used	No calculation performed	XP_CFI_INSTR_ATT_CLOSE_WRONG_ID_ERR	0

### 7.31.6 Runtime Performances

The following runtime performances have been measured.

*Table 113: Runtime performances of xp\_instr\_att\_close*

Ultra Sparc II-400 [ms]
TBD

## 7.32 xp\_instr\_att\_get\_angles

### 7.32.1 Overview

The `xp_instr_att_get_angles` CFI function returns the angle data used for the instrument attitude initialization.

### 7.32.2 Calling interface

The calling interface of the `xp_instr_att_get_angles` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_instr_trans_id instr_trans_id;
    long status;
    xp_angle_model_str data;
    status = xp_instr_att_get_angles (&instr_trans_id,
                                     &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.32.3 Input parameters

The `xp_instr_att_get_angles` CFI function has the following input parameters:

*Table 114: Input parameters of xp\_instr\_att\_get\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id *	-	Instrument transformation ID.	-	-

### 7.32.4 Output parameters

The output parameters of the `xp_instr_att_get_angles` CFI function are:



*Table 115: Output parameters of xp\_instr\_att\_get\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_instr_att_get_angles	long	-	Status flag	-	-
data	xp_angle_model_str	-	Attitude initialization data	-	-

### 7.32.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The instr\_trans\_id was not initialised.
- The instr\_trans\_id initialisation does not allow the use of this function.

### 7.32.6 Runtime performances

The following runtime performances have been estimated.

*Table 116: Runtime performances of xp\_instr\_att\_get\_angles function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.33 xp\_instr\_att\_set\_angles

### 7.33.1 Overview

The `xp_instr_att_set_angles` CFI function changes the harmonic data used for the satellite attitude initialization.

### 7.33.2 Calling interface

The calling interface of the `xp_instr_att_set_angles` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_instr_trans_id instr_trans_id;
    long status;
    xp_angle_model_str data;
    status = xp_instr_att_set_angles (&instr_trans_id,
                                     &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.33.3 Input parameters

The `xp_instr_att_set_angles` CFI function has the following input parameters:

*Table 117: Input parameters of xp\_instr\_att\_set\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Instrument transformation ID (input / output parameter)	-	-
data	xp_angle_model_str	-	Attitude initialization data	-	-

### 7.33.4 Output parameters

The output parameters of the `xp_instr_att_set_angles` CFI function are:

*Table 118: Output parameters of xp\_instr\_att\_set\_angles function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_instr_att_set_angles	long	-	Status flag	-	-
instr_trans_id	xp_instr_trans_id *	-	Instrument transformation ID (input / output parameter)	-	-

### 7.33.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The instr\_trans\_id was not initialised.
- The instr\_trans\_id initialisation does not allow the use of this function.

### 7.33.6 Runtime performances

The following runtime performances have been estimated.

*Table 119: Runtime performances of xp\_instr\_att\_set\_angles function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.34 xp\_instr\_att\_get\_matrix

### 7.34.1 Overview

The `xp_instr_att_get_matrix` CFI function returns the matrix data used for the satellite attitude initialization.

### 7.34.2 Calling interface

The calling interface of the `xp_instr_att_get_matrix` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_instr_trans_id instr_trans_id;
    long status;
    xp_matrix_model_str data;
    status = xp_instr_att_get_matrix (&instr_trans_id,
                                     &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.34.3 Input parameters

The `xp_instr_att_get_matrix` CFI function has the following input parameters:

*Table 120: Input parameters of xp\_instr\_att\_get\_matrix function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id *	-	Instrument transformation ID.	-	-

### 7.34.4 Output parameters

The output parameters of the `xp_instr_att_get_matrix` CFI function are:

*Table 121: Output parameters of xp\_instr\_att\_get\_matrix function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_instr_att_get_matrix	long	-	Status flag	-	-
data	xp_matrix_mode_l_str	-	Attitude initialization data	-	-

### 7.34.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The instr\_trans\_id was not initialised.
- The instr\_trans\_id initialisation does not allow the use of this function.

### 7.34.6 Runtime performances

The following runtime performances have been estimated.

*Table 122: Runtime performances of xp\_instr\_att\_get\_matrix function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.35 xp\_instr\_att\_set\_matrix

### 7.35.1 Overview

The **xp\_instr\_att\_set\_matrix** CFI function changes matrix data used for the satellite attitude initialization.

### 7.35.2 Calling interface

The calling interface of the **xp\_instr\_att\_set\_matrix** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_instr_trans_id instr_trans_id;
    long status;
    xp_matrix_model_str data;
    status = xp_instr_att_set_matrix (&instr_trans_id,
                                     &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the #include statement):

TBD

### 7.35.3 Input parameters

The **xp\_instr\_att\_set\_matrix** CFI function has the following input parameters:

*Table 123: Input parameters of xp\_instr\_att\_set\_matrix function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id *	-	Instrument transformation ID (input / output parameter)	-	-
data	xp_angle_model_str	-	Attitude initialization data	-	-

### 7.35.4 Output parameters

The output parameters of the **xp\_instr\_att\_set\_matrix** CFI function are:

*Table 124: Output parameters of xp\_instr\_att\_set\_matrix function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_instr_att_set_matrix	long	-	Status flag	-	-
instr_trans_id	xp_instr_trans_id *	-	Instrument transformation ID (input / output parameter)	-	-

### 7.35.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The instr\_trans\_id was not initialised.
- The instr\_trans\_id initialisation does not allow the use of this function.

### 7.35.6 Runtime performances

The following runtime performances have been estimated.

*Table 125: Runtime performances of xp\_instr\_att\_set\_matrix function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.36 xp\_instr\_att\_get\_harmonic

### 7.36.1 Overview

The **xp\_instr\_att\_get\_harmonic** CFI function returns harmonic data used for the satellite attitude initialization.

### 7.36.2 Calling interface

The calling interface of the **xp\_instr\_att\_get\_harmonic** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_instr_trans_id instr_trans_id;
    long status;
    xp_harmonic_model_str data;
    status = xp_instr_att_get_harmonic (&instr_trans_id,
                                        &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.36.3 Input parameters

The **xp\_instr\_att\_get\_harmonic** CFI function has the following input parameters:

*Table 126: Input parameters of xp\_instr\_att\_get\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Instrument transformation ID.	-	-

### 7.36.4 Output parameters

The output parameters of the **xp\_instr\_att\_get\_harmonic** CFI function are:



*Table 127: Output parameters of xp\_instr\_att\_get\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_instr_att_get_harmonic	long	-	Status flag	-	-
data	xp_harmonic_model_str	-	Attitude initialization data	-	-

### 7.36.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The instr\_trans\_id was not initialised.
- The instr\_trans\_id initialisation does not allow the use of this function.

### 7.36.6 Runtime performances

The following runtime performances have been estimated.

*Table 128: Runtime performances of xp\_instr\_att\_get\_harmonic function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.37 xp\_instr\_att\_set\_harmonic

### 7.37.1 Overview

The **xp\_instr\_att\_set\_harmonic** CFI function changes the harmonic data used for the satellite attitude initialization.

### 7.37.2 Calling interface

The calling interface of the **xp\_instr\_att\_set\_harmonic** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_instr_trans_id instr_trans_id;
    long status;
    xp_harmonic_model_str data;
    status = xp_instr_att_set_harmonic (&instr_trans_id,
                                        &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.37.3 Input parameters

The **xp\_instr\_att\_set\_harmonic** CFI function has the following input parameters:

*Table 129: Input parameters of xp\_instr\_att\_set\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Instrument transformation ID (input / output parameter)	-	-
data	xp_harmonic_model_str	-	Attitude initialization data	-	-

### 7.37.4 Output parameters

The output parameters of the **xp\_instr\_att\_set\_harmonic** CFI function are:

*Table 130: Output parameters of xp\_instr\_att\_set\_harmonic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_instr_att_set_harmonic	long	-	Status flag	-	-
instr_trans_id	xp_instr_trans_id *	-	Instrument transformation ID (input / output parameter)	-	-

### 7.37.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The instr\_trans\_id was not initialised.
- The instr\_trans\_id initialisation does not allow the use of this function.

### 7.37.6 Runtime performances

The following runtime performances have been estimated.

*Table 131: Runtime performances of xp\_instr\_att\_set\_harmonic function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.38 xp\_instr\_att\_get\_file

### 7.38.1 Overview

The **xp\_instr\_att\_get\_file** CFI function returns satellite attitude data from the satellite attitude Id. that was initialized with a file.

### 7.38.2 Calling interface

The calling interface of the **xp\_instr\_att\_get\_file** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_instr_trans_id instr_trans_id;
    long status;
    xp_instr_att_file_model_str data;
    status = xp_instr_att_get_file (&instr_trans_id,
                                    &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the #include statement):

TBD

### 7.38.3 Input parameters

The **xp\_instr\_att\_get\_file** CFI function has the following input parameters:

*Table 132: Input parameters of xp\_instr\_att\_get\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Instrument transformation ID.	-	-

### 7.38.4 Output parameters

The output parameters of the **xp\_instr\_att\_get\_file** CFI function are:

*Table 133: Output parameters of xp\_instr\_att\_get\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_instr_att_get_file	long	-	Status flag	-	-
data	xp_instr_att_file_model_str	-	Attitude initialization data	-	-

### 7.38.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The instr\_trans\_id was not initialised.
- The instr\_trans\_id initialisation does not allow the use of this function.

### 7.38.6 Runtime performances

The following runtime performances have been estimated.

*Table 134: Runtime performances of xp\_instr\_att\_get\_file function*

Ultra Sparc II-400 [ms]
TBD

## 7.39 xp\_instr\_att\_set\_file

### 7.39.1 Overview

The **xp\_instr\_att\_set\_file** CFI function changes the initialization data in the satellite attitude Id. when it was initialised with a file.

### 7.39.2 Calling interface

The calling interface of the **xp\_instr\_att\_set\_file** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_instr_trans_id instr_trans_id;
    long status;
    xp_instr_att_file_model_str data;
    status = xp_instr_att_set_file (&instr_trans_id,
                                   &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the #include statement):

TBD

### 7.39.3 Input parameters

The **xp\_instr\_att\_set\_file** CFI function has the following input parameters:

*Table 135: Input parameters of xp\_instr\_att\_set\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
instr_trans_id	xp_instr_trans_id*	-	Instrument transformation ID (input / output parameter)	-	-
data	xp_instr_att_file_model_str	-	Attitude initialization data	-	-

### 7.39.4 Output parameters

The output parameters of the **xp\_instr\_att\_set\_file** CFI function are:

*Table 136: Output parameters of xp\_instr\_att\_set\_file function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_instr_att_set_file	long	-	Status flag	-	-
instr_trans_id	xp_instr_trans_id *	-	Instrument transformation ID (input / output parameter)	-	-

### 7.39.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The instr\_trans\_id was not initialised.
- The instr\_trans\_id initialisation does not allow the use of this function.

### 7.39.6 Runtime performances

The following runtime performances have been estimated.

*Table 137: Runtime performances of xp\_instr\_att\_set\_file function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.40 xp\_run\_init

### 7.40.1 Overview

The **xp\_run\_init** CFI function adds to the *run id* the *sat\_nom\_trans\_id*, *sat\_trans\_id*, *instr\_trans\_id*, *atmos Id* and *dem Id*.

### 7.40.2 Calling interface

The calling interface of the **xp\_run\_init** CFI function is the following:

```
#include <explorer_pointing.h>
{
    long run_id;
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    xp_sat_trans_id      sat_trans_id = {NULL};
    xp_instr_trans_id    instr_trans_id = {NULL};
    xp_atmos_id          atmos_id = {NULL};
    xp_dem_id            dem_id = {NULL};
    long ierr[XP_NUM_ERR_RUN_INIT], status;
    status = xp_run_init (&run_id, &sat_nom_trans_id,
                        &sat_trans_id, &instr_trans_id,
                        &atmos_id, &dem_id,
                        ierr);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD



### 7.40.3 Input parameters

The **xp\_run\_init** CFI function has the following input parameters:

*Table 138: Input parameters of xp\_run\_init function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
run_id	long *	-	Run ID	-	>=0
sat_nom_trans_id	xp_sat_nom_trans_id*	-	Structure that contains the Sat. Nom. Trans.	-	-
sat_trans_id	xp_sat_trans_id*	-	Structure that contains the Sat. Trans.	-	-
instr_trans_id	xp_instr_trans_id*	-	Structure that contains the Instr. Trans.	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-

### 7.40.4 Output parameters

The output parameters of the **xp\_run\_init** CFI function are:

*Table 139: Output parameters of xp\_run\_init function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_run_init	long	-	Status flag	-	-
run_id	long *	-	Run ID	-	>=0
ierr	long	-	Error vector	-	-

### 7.40.5 Warnings and errors

Next table lists the possible error messages that can be returned by the **xp\_run\_init** CFI function after translating the returned extended status flag into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained translating the ex-

tended status flag returned by the **xp\_run\_init** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 140: Error messages of xl\_run\_init function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Wrong input run_id. It is not correctly initialized	No calculation performed	XP_CFI_RUN_INIT_STATUS_ERR	0
ERR	Memory allocation error	No calculation performed	XP_CFI_RUN_INIT_MEMORY_ERR	1
ERR	Incompatible input Ids	No calculation performed	XP_CFI_RUN_INIT_INCONSISTENCY_ERR	2

### **7.40.6 Runtime performances**

The following runtime performances have been estimated (runtime is smaller than CPU clock and it is not possible to perform loops for measuring it).

*Table 141: Runtime performances of xp\_run\_init function*

Ultra Sparc II-400 [ms]
TBD

## 7.41 xp\_run\_get\_ids

### 7.41.1 Overview

The **xp\_run\_get\_ids** CFI function returns the *ids* being used..

### 7.41.2 Calling interface

The calling interface of the **xp\_run\_get\_ids** CFI function is the following:

```
#include <explorer_pointing.h>
{
    long run_id;
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    xp_sat_trans_id      sat_trans_id = {NULL};
    xp_instr_trans_id    instr_trans_id = {NULL};
    xp_atmos_id          atmos_id = {NULL};
    xp_dem_id            dem_id = {NULL};
    long status;
    status = xp_run_get_ids (&run_id,
                            &sat_nom_trans_id,
                            &sat_trans_id,
                            &instr_trans_id,
                            &atmos_id,
                            &dem_id);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.41.3 Input parameters

The `xp_run_get_ids` CFI function has the following input parameters:

*Table 142: Input parameters of `xp_run_get_ids` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
run_id	long *	-	Run ID	-	>=0

### 7.41.4 Output parameters

The output parameters of the `xp_run_get_ids` CFI function are:

*Table 143: Output parameters of `xp_run_get_ids` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xl_run_get_ids	long	-	Status flag	-	-
sat_nom_trans_id	xp_sat_nom_trans_id*	-	Structure that contains the Sat. Nom. Trans.	-	-
sat_trans_id	xp_sat_trans_id*	-	Structure that contains the Sat. Trans.	-	-
instr_trans_id	xp_instr_trans_id*	-	Structure that contains the Instr. Trans.	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-

### 7.41.5 Warnings and errors

TBW

### 7.41.6 Runtime performances

The following runtime performances have been estimated (runtime is smaller than CPU clock and it is not possible to perform loops for measuring it).

*Table 144: Runtime performances of `xp_run_get_ids` function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

---

## 7.42 xp\_run\_close

### 7.42.1 Overview

The **xp\_run\_close** CFI function cleans up any memory allocation performed by the initialization functions.

### 7.42.2 Calling interface

The calling interface of the **xp\_run\_close** CFI function is the following:

```
#include <explorer_pointing.h>
{
    long run_id;
    status = xp_run_close (&run_id);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>

INTEGER*4 RUN_ID
STATUS = XP_RUN_CLOSE (RUN_ID)
```

### 7.42.3 Input parameters

The `xp_run_close` CFI function has the following input parameters:

*Table 145: Input parameters of `xp_run_close` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
run_id	long *	-	Run ID	-	>=0

### 7.42.4 Output parameters

The output parameters of the `xp_run_close` CFI function are:

*Table 146: Output parameters of `xp_run_close` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xl_run_close	long	-	Status flag	-	-

### 7.42.5 Warnings and errors

TBW

### 7.42.6 Runtime performances

The following runtime performances have been estimated (runtime is smaller than CPU clock and it is not possible to perform loops for measuring it).

*Table 147: Runtime performances of `xp_run_close` function*

Ultra Sparc II-400 [ms]
TBD

## 7.43 xp\_attitude\_init

### 7.43.1 Overview

The `xp_attitude_init` CFI function creates an empty *attitude Id*.

### 7.43.2 Calling Interface

The calling interface of the `xp_attitude_init` CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_attitude_id attitude_id = {NULL};
    long ierr[XP_NUM_ERR_ATTITUDE_INIT], status;

    status = xp_attitude_init(&attitude_id, ierr);
}
```

The `XP_NUM_ERR_ATTITUDE_INIT` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 IERR(XP_NUM_ERR_ATTITUDE_INIT), STATUS

    STATUS = XP_ATTITUDE_INIT(SAT_ID, INSTRUMENT_ID, IERR)
```

### 7.43.3 Input Parameters

The **xp\_attitude\_init** CFI function has no input parameters.

### 7.43.4 Output Parameters

The output parameters of the **xp\_attitude\_init** CFI function are:

*Table 148: Output parameters of xp\_attitude\_init*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude.	-	-
ierr	long	-	Error vector	-	-

### 7.43.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_attitude\_init** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_attitude\_init** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 149: Error messages of xp\_attitude\_init function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_ATTITUDE_INIT_MEMORY_ERR	0

### 7.43.6 Runtime Performances

The following runtime performances have been measured.

*Table 150: Runtime performances of xp\_attitude\_init*

Ultra Sparc II-400 [ms]
TBD



## 7.44 xp\_attitude\_compute

### 7.44.1 Overview

The **xp\_attitude\_compute** CFI function calculates the Attitude Frame for a given S/C state vector.

### 7.44.2 Calling interface

The calling interface of the **xp\_attitude\_compute** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xl_time_id          time_id = {NULL};
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    xp_sat_trans_id     sat_trans_id = {NULL};
    xp_instr_trans_id   instr_trans_id = {NULL};
    xp_attitude_id      attitude_id = {NULL};
    long time_ref, target_frame;
    double time, pos[3], vel[3], acc[3];
    long ierr[XP_NUM_ERR_ATTITUDE_COMPUTE];

    status =xp_attitude_compute(&time_id,
                                &sat_nom_trans_id,
                                &sat_trans_id,
                                &instr_trans_id,
                                &attitude_id,          /* input/output */
                                &time_ref, &time, pos, vel, acc,
                                &target_frame,
                                ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_attitude_compute_run(&run_id,
                                      &attitude_id, /* input/output */
                                      &time_ref, &time, pos, vel, acc,
                                      &target_frame,
                                      ierr);
}
```

The `XP_NUM_ERR_ATTITUDE_COMPUTE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.44.3 Input parameters

The `xp_attitude_compute` CFI function has the following input parameters:

*Table 151: Input parameters of xp\_attitude\_compute function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
time_id	<u>xl_time_id*</u>	-	Structure that contains the time correlations.	-	-
sat_nom_trans_id	<u>xp_sat_nom_trans_id*</u>	-	Structure that contains the Sat. Nom. Trans.	-	-
sat_trans_id	<u>xp_sat_trans_id*</u>	-	Structure that contains the Sat. Trans.	-	-
instr_trans_id	<u>xp_instr_trans_id*</u>	-	Structure that contains the Instr. Trans.	-	-
attitude_id	<u>xp_attitude_id*</u>	-	Structure that contains the Attitude (input/output)	-	-
time_ref	long *	-	Time reference ID	-	Complete
time	double	-	Time in Processing Format	Decimal days, MJD2000	[-18262.0,36524.0]
pos[3]	double	all	Satellite position vector (Earth Fixed CS)	m	-
vel[3]	double	all	Satellite velocity vector (Earth Fixed CS)	m/s	-
acc[3]	double	all	Satellite acceleration vector (Earth Fixed CS)	m/s <sup>2</sup>	-
target_frame	long *	-	Attitude FrameID	-	Complete

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Time Reference ID: `time_ref`. See [GEN\_SUM].
- Attitude Frame ID: `attitude_frame_id`. See current document, table 3

### 7.44.4 Output parameters

The output parameters of the **xp\_attitude\_compute** CFI function are:

*Table 152: Output parameters of xp\_attitude\_compute function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
ierr	long	-	Error vector	-	-

### 7.44.5 Warnings and errors

Next table lists the possible error messages that can be returned by the **xp\_attitude\_compute** CFI function after translating the returned extended status flag into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xl\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained translating the extended status flag returned by the **xp\_attitude\_compute** function by calling the function of the EXPLORER\_POINTING software library **xl\_get\_code** (see [GEN\_SUM]).

*Table 153: Error messages of xp\_attitude\_compute function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Time Id. not initialized	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_TIME_STATUS_ERR	0
ERR	Instrument Trans. Id. not initialized	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_INSTR_TRANS_STATUS_ERR	1
ERR	Satellite Att. Trans. not initialized	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_SAT_TRANS_STATUS_ERR	2
ERR	Satellite Nom. Trans not initialized	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_SAT_NOM_TRANS_STATUS_ERR	3
ERR	Attitude Id. not initialized	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_ATTITUDE_STATUS_ERR	4
ERR	Wrong input time reference	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_WRONG_TIME_REF_ERR	5

*Table 153: Error messages of xp\_attitude\_compute function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id is being used by another Id.	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_BEING_USED_ERR	6
ERR	Could not compute orbit reference frame	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_ORB_REF_ERR	7
ERR	Could not calculate AOCS parameters	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_AOCS_CALC_ERR	8
ERR	Could not compute Sat. Nom. Trans frame	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_SAT_NOM_TRANS_ERR	9
ERR	"Could not calculate the true latitude"	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_TRUE_LAT_ERR	10
ERR	Could not calculate harmonic angles	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_HARMONIC_CALC_ERR	11
ERR	Could not compute Sat. Trans. frame	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_SAT_TRANS_ERR	12
ERR	Error computing direction cosine matrix from Sat. Att. to BJ2000	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_ATT_TO_J2000_ERR	13
ERR	Could not compute Instrument Trans. frame	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_INSTR_TRANS_ERR	14
ERR	Memory allocation error	No calculation performed	XP_CFI_ATTITUDE_COMPUTE_MEMORY_ERR	15

### 7.44.6 Runtime performances

The following runtime performances have been measured.

Two runtime figures are provided, one with fixed inputs, i.e. the function has been called several times with the same position, velocity and acceleration vectors, but modifying the other input parameters; and a second one with random inputs, i.e all the inputs have been modified from call to call and the average time has been taken.

*Table 154: Runtime performances of xp\_attitude\_compute function*

Ultra Sparc II-400 [ms] RANDOM inputs	Ultra Sparc II-400 [ms] FIXED inputs
TBD	TBD

## 7.45 xp\_attitude\_user\_set

### 7.45.1 Overview

The **xp\_attitude\_user\_set** CFI function assigns a user defined Attitude Frame to the *attitude Id*.

### 7.45.2 Calling interface

The calling interface of the **xp\_attitude\_user\_set** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xl_time_id          time_id = {NULL};
    xp_attitude_id     attitude_id = {NULL};
    long time_ref, target_frame;
    double time, pos[3], vel[3], acc[3];
    double matrix[3][3];
    double matrix_rate[3][3];
    double matrix_rate_rate[3][3];
    double offset[3],;
    long ierr[XP_NUM_ERR_ATTITUDE_USER_SET];

    long xp_attitude_user_set(&time_id,
                             &attitude_id,          /* input / output */
                             &time_ref, &time, pos, vel, acc,
                             &target_frame,
                             matrix, matrix_rate, matrix_rate_rate,
                             offset,
                             ierr);

    /* Or, using the run_id */
    long run_id;

    long xp_attitude_user_set_run(&run_id,
                                   &attitude_id,          /* input / output */
                                   &time_ref, &time, pos, vel, acc,
                                   &target_frame,
                                   matrix, matrix_rate, matrix_rate_rate,
                                   offset,
                                   ierr);
}
```

The `XP_NUM_ERR_ATTITUDE_USER_SET` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.45.3 Input parameters

The `xp_attitude_user_set` CFI function has the following input parameters:

Table 155: Input parameters of `xp_attitude_user_set` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>time_id</code>	<code>xl_time_id*</code>	-	Structure that contains the time correlations.	-	-
<code>attitude_id</code>	<code>xp_attitude_id*</code>	-	Structure that contains the Attitude (input/output)	-	-
<code>time_ref</code>	<code>long *</code>	-	Time reference ID	-	Complete
<code>time</code>	<code>double</code>	-	Time in Processing Format	Decimal days, MJD2000	[-18262.0,36524.0]
<code>pos[3]</code>	<code>double</code>	all	Satellite position vector (Earth Fixed CS)	m	-
<code>vel[3]</code>	<code>double</code>	all	Satellite velocity vector (Earth Fixed CS)	m/s	-
<code>acc[3]</code>	<code>double</code>	all	Satellite acceleration vector (Earth Fixed CS)	m/s <sup>2</sup>	-
<code>target_frame</code>	<code>long *</code>	-	Attitude FrameID	-	Complete
<code>matrix[3][3]</code>	<code>double</code>	all	Matrix representing the transformation from ToD to <code>target_frame</code>	-	-
<code>matrix_rate [3][3]</code>	<code>double</code>	all	Matrix representing the transformation rate from ToD to <code>target_frame</code>	-	-
<code>matrix_rate_rate [3][3]</code>	<code>double</code>	all	Matrix representing the transformation rate rate from ToD to <code>target_frame</code>	-	-
<code>offset[3]</code>	<code>double</code>	all	Offset in the reference frame origin	m	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Time Reference ID: `time_ref`. See [GEN\_SUM].
- Attitude Frame ID: `attitude_frame_id`. See current document, table 3

### 7.45.4 Output parameters

The output parameters of the `xp_attitude_user_set` CFI function are:

*Table 156: Output parameters of xp\_attitude\_user\_set function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
ierr	long	-	Error vector	-	-

### 7.45.5 Warnings and errors

Next table lists the possible error messages that can be returned by the `xp_attitude_user_set` CFI function after translating the returned extended status flag into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xl_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained translating the extended status flag returned by the `xp_attitude_user_set` function by calling the function of the EXPLORER\_POINTING software library `xl_get_code` (see [GEN\_SUM]).

*Table 157: Error messages of xp\_attitude\_user\_set function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Time Id. not initialized	No calculation performed	XP_CFI_ATTITUDE_USER_SET_TIME_STATUS_ERR	0
ERR	Wrong input target frame	No calculation performed	XP_CFI_ATTITUDE_USER_SET_WRONG_TARGET_FRAME_ERR	1
ERR	Attitude Id. not initialized	No calculation performed	XP_CFI_ATTITUDE_USER_SET_ATTITUDE_STATUS_ERR	2
ERR	Attitude Id is being used by another Id	No calculation performed	XP_CFI_ATTITUDE_USER_SET_BEING_USED_ERR	3
ERR	Could not compute orbit reference frame	No calculation performed	XP_CFI_ATTITUDE_USER_SET_ORB_REF_ERR	4
ERR	Memory allocation error	No calculation performed	XP_CFI_ATTITUDE_USER_SET_MEMORY_ERR	5

### 7.45.6 Runtime performances

The following runtime performances have been measured.

Two runtime figures are provided, one with fixed inputs, i.e. the function has been called several times with the same position, velocity and acceleration vectors, but modifying the other input parameters; and a second one with random inputs, i.e all the inputs have been modified from call to call and the average time has been taken.

*Table 158: Runtime performances of xp\_attitude\_user\_set function*

Ultra Sparc II-400 [ms] RANDOM inputs	Ultra Sparc II-400 [ms] FIXED inputs
TBD	TBD



## 7.46 xp\_attitude\_close

### 7.46.1 Overview

The **xp\_attitude\_close** CFI function cleans up any memory allocation performed by the Attitude functions.

### 7.46.2 Calling Interface

The calling interface of the **xp\_attitude\_close** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_attitude_id attitude_id = {NULL};
    long ierr[XP_NUM_ERR_ATTITUDE_CLOSE], status;

    status = xp_attitude_close(&attitude_id, ierr);
}
```

The XP\_NUM\_ERR\_ATTITUDE\_CLOSE constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 IERR(XP_NUM_ERR_ATTITUDE_INIT), STATUS

    STATUS = XP_ATTITUDE_CLOSE(SAT_ID, INSTRUMENT_ID, IERR)
```

### 7.46.3 Input Parameters

The **xp\_attitude\_close** CFI function has the following input parameters:

*Table 159: Input parameters of xp\_attitude\_close function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
attitude_id	xp_attitude_id *	-	Structure that contains the Attitude.	-	-

### 7.46.4 Output Parameters

The output parameters of the **xp\_attitude\_close** CFI function are:

*Table 160: Output parameters of xp\_attitude\_close*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ierr	long	-	Error vector	-	-

### 7.46.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_attitude\_close** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_attitude\_close** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 161: Error messages of xp\_attitude\_close function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Could not close Attitude Id. The Attitude Id. is not initialized or it is being used	No calculation performed	XP_CFI_ATTITUDE_CLOSE_WRONG_ID_ERR	0

---

### 7.46.6 Runtime Performances

The following runtime performances have been measured.

*Table 162: Runtime performances of xp\_attitude\_close*

Ultra Sparc II-400 [ms]
TBD

## 7.47 xp\_attitude\_get\_id\_data

### 7.47.1 Overview

The **xp\_attitude\_get\_id\_data** CFI function returns attitude initialization data.

### 7.47.2 Calling interface

The calling interface of the **xp\_attitude\_get\_id\_data** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_attitude_id attitude_id;
    long status;
    xp_attitude_id_data data;
    status = xp_attitude_get_id_data (&attitude_id,
                                     &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the #include statement):

TBD

### 7.47.3 Input parameters

The **xp\_attitude\_get\_id\_data** CFI function has the following input parameters:

*Table 163: Input parameters of xp\_attitude\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
attitude_id	xp_attitude_id *	-	Structure that contains the Attitude.	-	-

### 7.47.4 Output parameters

The output parameters of the **xp\_attitude\_get\_id\_data** CFI function are:

*Table 164: Output parameters of xp\_attitude\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_attitude_get_id_data	long	-	Status flag	-	-
data	xp_attitude_id_data	-	Attitude initialization data	-	-

### 7.47.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The attitude\_id was not initialised.
- The attitude\_id initialisation does not allow the use of this function.

### 7.47.6 Runtime performances

The following runtime performances have been estimated.

*Table 165: Runtime performances of xp\_attitude\_get\_id\_data function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.48 xp\_attitude\_set\_id\_data

### 7.48.1 Overview

The **xp\_attitude\_set\_id\_data** CFI function changes the harmonic data used for the satellite attitude initialization.

### 7.48.2 Calling interface

The calling interface of the **xp\_attitude\_set\_id\_data** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_attitude_id attitude_id;
    long status;
    xp_attitude_id_data data;
    status = xp_attitude_set_id_data (&attitude_id,
                                     &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.48.3 Input parameters

The **xp\_attitude\_set\_id\_data** CFI function has the following input parameters:

*Table 166: Input parameters of xp\_attitude\_set\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
attitude_id	xp_attitude_id *	-	Structure that contains the Attitude (input / output parameter)	-	-
data	xp_attitude_id_data	-	Attitude initialization data	-	-

### 7.48.4 Output parameters

The output parameters of the **xp\_attitude\_set\_id\_data** CFI function are:

*Table 167: Output parameters of xp\_attitude\_set\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_attitude_set_id_data	long	-	Status flag	-	-
attitude_id	xp_attitude_id *	-	Structure that contains the Attitude. (input / output parameter)	-	-

### 7.48.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The attitude\_id was not initialised.
- The attitude\_id initialisation does not allow the use of this function.

### 7.48.6 Runtime performances

The following runtime performances have been estimated.

*Table 168: Runtime performances of xp\_attitude\_set\_id\_data function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.49 xp\_change\_frame

### 7.49.1 Overview

The **xp\_change\_frame** CFI function changes the coordinate or attitude frame of a location or direction by keeping the location or direction in inertial space identical. Both all coordinate frames and all attitude frames are supported. When changing the frame for a location, the difference in origin of the frames is taken into account. While when changing the frame for a direction, the target is assumed to be at infinity.

### 7.49.2 Calling interface

The calling interface of the **xp\_change\_frame** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long sat_id, mode_flag, frame_flag_in, frame_id_in,
        frame_flag_out, frame_id_out, time_ref;
    xl_time_id      time_id = {NULL};
    xp_sat_nom_trans_id sat_nom_trans_id = {NULL};
    xp_sat_trans_id  sat_trans_id = {NULL};
    xp_instr_trans_id instr_trans_id = {NULL};
    double time;
    double pos[3], vel[3], acc[3];
    long deriv;
    double vec_in[3], vec_rate_in[3], vec_rate_rate_in[3];
    double vec_out[3], vec_rate_out[3], vec_rate_rate_out[3];
    long ierr[XP_NUM_ERR_CHANGE_FRAME], status;
    status = xp_change_frame (&sat_id,
                             &time_id,
                             &sat_nom_trans_id,
                             &sat_trans_id,
                             &instr_trans_id,
                             &mode_flag,
                             &frame_flag_in, &frame_id_in,
                             &frame_flag_out, &frame_id_out,
                             &time_ref, &time,
                             pos, vel, acc, &deriv,
                             vec_in, vec_rate_in, vec_rate_rate_in,
                             vec_out, vec_rate_out, vec_rate_rate_out,
                             ierr);
}
```



```

/* Or, using the run_id */
long run_id;

status = xp_change_frame_run (&run_id,
                             &mode_flag,
                             &frame_flag_in, &frame_id_in,
                             &frame_flag_out, &frame_id_out,
                             &time_ref, &time,
                             pos, vel, acc, &deriv,
                             vec_in, vec_rate_in, vec_rate_rate_in,
                             vec_out, vec_rate_out, vec_rate_rate_out,
                             ierr);
}

```

The XP\_NUM\_ERR\_CHANGE\_FRAME constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```

#include <explorer_pointing.inc>

LONG SAT_ID, MODE_FLAG, FRAME_FLAG_IN, FRAME_ID_IN,
&      FRAME_FLAG_OUT, FRAME_ID_OUT, INSTRUMENT_ID, TIME_REF
REAL*8 TIME
REAL*8 POS_IN(3),VEL_IN(3), ACC_IN(3)
REAL*8 VEC_IN(3),VEC_RATE_IN(3), VEC_RATE_RATE_IN(3)
REAL*8 VEC_OUT(3),VEC_RATE_OUT(3), VEC_RATE_RATE_OUT(3)
INTEGER*4 IERR(XP_NUM_ERR_ATTITUDE), STATUS

STATUS = XP_CHANGE_FRAME (SAT_ID, MODE_FLAG,
&      FRAME_FLAG_IN, FRAME_ID_IN,
&      FRAME_FLAG_OUT, FRAME_ID_OUT,
&      INSTRUMENT_ID, TIME_REF, TIME,
&      POS, VEL, ACC,
&      VEC_IN, VEC_RATE_IN, VEC_RATE_RATE_IN,
&      VEC_OUT, VEC_RATE_OUT, VEC_RATE_RATE_OUT,
&      IERR)

```

### 7.49.3 Input parameters

The `xp_change_frame` CFI function has the following input parameters:

*Table 169: Input parameters of `xp_change_frame` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
time_id	xl_time_id*	-	Structure that contains the time correlations.	-	-
sat_nom_trans_id	xp_sat_nom_trans_id*	-	Structure that contains the Sat. Nom. Trans.	-	-
sat_trans_id	xp_sat_trans_id*	-	Structure that contains the Sat. Trans.	-	-
instr_trans_id	xp_instr_trans_id*	-	Structure that contains the Instr. Trans.	-	-
mode_flag	long *	-	Selection of location or direction calculus		Complete
frame_flag_in	long *	-	Selection of Coordinate or Attitude Frame on input		Complete
frame_id_in	long *		Coordinate Frame id or Attitude Frame id on input		Complete
frame_flag_out	long *	-	Selection of Coordinate or Attitude Frame on output		Complete
frame_id_out	long *		Coordinate Frame id or Attitude Frame id on output		Complete
time_ref	long *	-	Time reference ID	-	Complete
time	double	-	Time in Processing Format	Decimal days, MJD2000	[-18262.0,36524.0]
pos[3]	double	all	Satellite position vector (Earth Fixed CS)	m	-
vel[3]	double	all	Satellite velocity vector (Earth Fixed CS)	m/s	-
acc[3]	double	all	Satellite acceleration vector (Earth Fixed CS)	m/s <sup>2</sup>	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
vec_in[3]	double	all	Position (direction) vector (Frame in)	m or -	-
vec_rate_in[3]	double	all	Velocity (direction) vector (Frame in)	m/s or 1/s	-
vec_rate_rate_in[3]	double	all	Acceleration (direction) vector (Frame in)	m/s <sup>2</sup> or 1/s <sup>2</sup>	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Time Reference ID: `time_ref`. See [GEN\_SUM].
- Selection of location or direction calculus: `mode_flag`. See current document, table 3.
- Selection of Coordinate or Attitude Frame: `frame_flag`. See current document, table 3

### 7.49.4 Output parameters

The output parameters of the `xp_change_frame` CFI function are

Table 170: Output parameters of `xp_change_frame` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
<code>vec_out[3]</code>	double	all	Position (direction) vector (Frame out)	m or -	-
<code>vec_rate_out[3]</code>	double	all	Velocity (direction) vector (Frame out)	m/s or 1/s	-
<code>vec_rate_rate_out[3]</code>	double	all	Acceleration (direction) vector (Frame out)	m/s <sup>2</sup> or 1/s <sup>2</sup>	-
<code>ierr</code>	long	-	Error vector	-	-

### 7.49.5 Warnings and errors

Next table lists the possible error messages that can be returned by the `xp_change_frame` CFI function after translating the returned extended status flag into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained translating the extended status flag returned by the `xp_change_frame` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

Table 171: Error messages of `xp_change_frame` function

Error type	Error message	Cause and impact	Error code	Error No
ERR	Could not initialize the attitude	No calculation performed	XP_CHANGE_FRAME_ATTITUDE_INIT_ERR	0
ERR	Frame input flag is not correct	No calculation performed	XP_CHANGE_FRAME_INPUT_FRAME_ERR	1
ERR	Frame output flag is not correct	No calculation performed	XP_CHANGE_FRAME_OUTPUT_FRAME_ERR	2
ERR	Error calling <code>xl_change_cart_cs</code>	No calculation performed	XP_CHANGE_FRAME_CHANGE_CART_CS_ERR	3
ERR	Could not compute the attitude	No calculation performed	XP_CHANGE_FRAME_ATTITUDE_COMP_ERR	4

*Table 171: Error messages of xp\_change\_frame function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	The Attitude Id could not be closed	No calculation performed	XP_CHANGE_FRAME_ATTITUDE_CLOSE_ERROR	5

### **7.49.6 Runtime performances**

The following runtime performances have been measured.

Two runtime figures are provided, one with fixed inputs, i.e. the function has been called several times with the same position, velocity and acceleration vectors, but modifying the other input parameters; and a second one with random inputs, i.e all the inputs have been modified from call to call and the average time has been taken.

*Table 172: Runtime performances of xp\_change\_frame function*

<b>Ultra Sparc II-400 [ms] RANDOM inputs</b>	<b>Ultra Sparc II-400 [ms] FIXED inputs</b>
TBD	TBD

## 7.50 xp\_atmos\_init

### 7.50.1 Overview

The **xp\_atmos\_init** CFI function initialises the atmospheric model for a given satellite. The initialised values will be stored in the *atmos\_id* output structure.

### 7.50.2 Calling Interface

The calling interface of the **xp\_atmos\_init** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long atmos_mode, atmos_model;
    char atmos_file[XL_MAX_STR];
    xp_atmos_id atmos_id = {NULL};
    long ierr[XP_NUM_ERR_ATMOS_INIT], status;

    status = xp_atmos_init(&atmos_mode, &atmos_model, atmos_file,
                          &atmos_id, ierr);
}
```

The `XP_NUM_ERR_ATMOS_INIT` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID
    INTEGER*4 ATMOS_MODE, ATMOS_MODEL
    CHARACTER*XL_MAX_STR ATMOS_FILE
    INTEGER*4 IERR(XP_NUM_ERR_ATMOS_INIT), STATUS

    STATUS = XP_ATMOS_INIT(SAT_ID, ATMOS_MODE, ATMOS_MODEL,
&                          ATMOS_FILE, IERR)
```

### 7.50.3 Input Parameters

The **xp\_atmos\_init** CFI function has the following input parameters:

*Table 173: Input parameters of xp\_atmos\_init function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
atmos_mode	long *	-	Atmosphere initialization mode	-	Complete
atmos_model	long *	-	Atmospheric model (to be used when the XP_COMPLEX_INIT mode is selected)	-	Complete
atmos_file	char[]	-	File used for atmosphere initialization	-	Complete

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Atmosphere Initialization Mode: `atmos_mode`. See current document, table 3.
- Atmosphere Model: `atmos_model`. See current document, table 3.

### 7.50.4 Output Parameters

The output parameters of the **xp\_atmos\_init** CFI function are:

*Table 174: Output parameters of xp\_atmos\_init*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
ierr	long	-	Error vector	-	-

### 7.50.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_atmos\_init** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_atmos\_init** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 175: Error messages of xp\_atmos\_init function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Atmosphere Mode ID is not correct	No calculation performed	XP_CFI_ATMOS_INIT_MODE_ID_ERR	0
ERR	Atmosphere Model ID is not correct	No calculation performed	XP_CFI_ATMOS_INIT_MODEL_ID_ERR	1
ERR	Atmosphere initialization file could not be opened	No calculation performed	XP_CFI_ATMOS_INIT_FILE_NOT_OPEN_ERR	2
ERR	Unable to store atmosphere initialization file (not enough memory)	No calculation performed	XP_CFI_ATMOS_INIT_MEMORY_ERR	3
ERR	Error while reading atmosphere initialization file	No calculation performed	XP_CFI_ATMOS_INIT_FILE_READING_ERR	4

### **7.50.6 Runtime Performances**

The following runtime performances have been measured.

*Table 176: Runtime performances of xp\_atmos\_init*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.51 xp\_atmos\_close

### 7.51.1 Overview

The **xp\_atmos\_close** CFI function cleans up any memory allocation performed by the **xp\_atmos\_init** functions.

### 7.51.2 Calling Interface

The calling interface of the **xp\_atmos\_close** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_atmos_id atmos_id = {NULL};
    long ierr[XP_NUM_ERR_ATMOS_CLOSE], status;

    status = xp_atmos_close(&atmos_id, ierr);
}
```

The `XP_NUM_ERR_ATMOS_CLOSE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 IERR(XP_NUM_ERR_ATMOS_CLOSE), STATUS

    STATUS = XP_ATMOS_CLOSE(SAT_ID, INSTRUMENT_ID, IERR)
```



### 7.51.3 Input Parameters

The **xp\_atmos\_close** CFI function has the following input parameters:

*Table 177: Input parameters of xp\_atmos\_close function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-

### 7.51.4 Output Parameters

The output parameters of the **xp\_atmos\_close** CFI function are:

*Table 178: Output parameters of xp\_atmos\_close*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ierr	long	-	Error vector	-	-

### 7.51.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_atmos\_close** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_atmos\_close** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 179: Error messages of xp\_atmos\_close function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Could not close the Atmos. Id. as it is not initialized or it is being used	No calculation performed	XP_CFI_ATMOS_CLOSE_WRONG_ID_ERR	0

---

### 7.51.6 Runtime Performances

The following runtime performances have been measured.

*Table 180: Runtime performances of xp\_atmos\_close*

Ultra Sparc II-400 [ms]
TBD

## 7.52 xp\_atmos\_get\_id\_data

### 7.52.1 Overview

The `xp_atmos_get_id_data` CFI function returns atmospheric initialization data.

### 7.52.2 Calling interface

The calling interface of the `xp_atmos_get_id_data` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_atmos_id atmos_id;
    long status;
    xp_atmos_id_data data;
    status = xp_atmos_get_id_data (&atmos_id, &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.52.3 Input parameters

The `xp_atmos_get_id_data` CFI function has the following input parameters:

*Table 181: Input parameters of xp\_atmos\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
atmos_id	xp_atmos_id *	-	Atmospheric Id.	-	-

### 7.52.4 Output parameters

The output parameters of the `xp_atmos_get_id_data` CFI function are:

*Table 182: Output parameters of xp\_atmos\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_atmos_get_id_data	long	-	Status flag	-	-

*Table 182: Output parameters of xp\_atmos\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
data	xp_atmos_id_data	-	Atmospheric initialization data	-	-

### 7.52.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The atmos\_id was not initialised.

### 7.52.6 Runtime performances

The following runtime performances have been estimated.

*Table 183: Runtime performances of xp\_atmos\_get\_id\_data function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.53 xp\_dem\_init

### 7.53.1 Overview

The **xp\_dem\_init** CFI function initialises the digital elevation model for a given satellite. The initialised values will be stored in the *dem\_id* output structure.

### 7.53.2 Calling Interface

The calling interface of the **xp\_dem\_init** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long mode, model;
    char dem_file[XL_MAX_STR];
    xp_dem_id dem_id = {NULL};
    long ierr[XP_NUM_ERR_DEM_INIT], status;

    status = xp_dem_init(&mode, &model, dem_file, &dem_id, ierr);
}
```

The `XP_NUM_ERR_DEM_INIT` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
INTEGER*4 SAT_ID
INTEGER*4 DEM_MODE
CHARACTER*XL_MAX_STR DEM_FILE
INTEGER*4 IERR(XP_NUM_ERR_DEM_INIT), STATUS

STATUS = XP_DEM_INIT(SAT_ID, DEM_MODE, DEM_FILE, IERR)
```

### 7.53.3 Input Parameters

The **xp\_dem\_init** CFI function has the following input parameters:

*Table 184: Input parameters of xp\_dem\_init function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
mode	long *	-	Digital Elevation Model initialization mode	-	Complete
model	long *	-	Digital Elevation Model initialization model (dummy in current implementation)	-	Complete
dem_file	char[]	-	File used for DEM initialization (See [DAT_SUM])	-	Complete

It is possible to use enumeration values rather than integer values for some of the input arguments:

- DEM Initialization Mode: mode. See current document, table 3.

### 7.53.4 Output Parameters

The output parameters of the **xp\_dem\_init** CFI function are:

*Table 185: Output parameters of xp\_dem\_init*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
dem_id	xp_dem_id*	-	Structure that contains the DEM initialization.	-	-
ierr	long	-	Error vector	-	-

### 7.53.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_dem\_init** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_dem\_init** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 186: Error messages of xp\_dem\_init function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	DEM Mode ID is not correct	No calculation performed	XP_CFI_DEM_INIT_MODE_ID_ERR	0
ERR	DEM Model ID is not correct	No calculation performed	XP_CFI_DEM_INIT_MODEL_ID_ERR	1
ERR	DEM initialization file could not be opened	No calculation performed	XP_CFI_DEM_INIT_FILE_NOT_OPEN_ERR	2
ERR	Unable to store DEM initialization file (not enough memory)	No calculation performed	XP_CFI_DEM_INIT_MEMORY_ERR	3
ERR	Error while reading DEM initialization file	No calculation performed	XP_CFI_DEM_INIT_FILE_READING_ERR	4

### **7.53.6 Runtime Performances**

The following runtime performances have been measured.

*Table 187: Runtime performances of xp\_dem\_init*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.54 xp\_dem\_close

### 7.54.1 Overview

The **xp\_dem\_close** CFI function cleans up any memory allocation performed by the **xp\_dem\_init** functions.

### 7.54.2 Calling Interface

The calling interface of the **xp\_dem\_close** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_dem_id dem_id = {NULL};
    long ierr[XP_NUM_ERR_DEM_CLOSE], status;

    status = xp_dem_close(&dem_id, ierr);
}
```

The `XP_NUM_ERR_DEM_CLOSE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 IERR(XP_NUM_ERR_DEM_CLOSE), STATUS

    STATUS = XP_DEM_CLOSE(SAT_ID, INSTRUMENT_ID, IERR)
```



### 7.54.3 Input Parameters

The **xp\_dem\_close** CFI function has the following input parameters:

*Table 188: Input parameters of xp\_dem\_close function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-

### 7.54.4 Output Parameters

The output parameters of the **xp\_dem\_close** CFI function are:

*Table 189: Output parameters of xp\_dem\_close*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ierr	long	-	Error vector	-	-

### 7.54.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_dem\_close** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_dem\_close** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 190: Error messages of xp\_dem\_close function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Could not close the Dem. Id. as it is not initialized or it is being used	No calculation performed	XP_CFI_DEM_CLOSE_WRONG_ID_ERR	0

---

### 7.54.6 Runtime Performances

The following runtime performances have been measured.

*Table 191: Runtime performances of xp\_dem\_close*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.55 xp\_dem\_compute

### 7.55.1 Overview

The **xp\_dem\_compute** CFI function compute the altitude over the sea level for a point in the Earth. The altitude is calculated from the altitudes read from a digital elevation model (DEM).

### 7.55.2 Calling Interface

The calling interface of the **xp\_dem\_compute** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_dem_id dem_id = {NULL};
    long ierr[XP_NUM_ERR_DEM_COMPUTE], status;
    double lon, lat, alt;
    status = xp_dem_compute(&dem_id, &lon, &lat, &alt, ierr);
}
```

The `XP_NUM_ERR_DEM_COMPUTE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 IERR(XP_NUM_ERR_DEM_COMPUTE), STATUS
    XP_DEM_ID DEM_ID = {NULL}
    REAL*8 LON, LAT, ALT
    STATUS = XP_DEM_COMPUTE(DEM_ID, LON, LAT, ALT, IERR)
```

### 7.55.3 Input Parameters

The `xp_dem_compute` CFI function has the following input parameters:

*Table 192: Input parameters of `xp_dem_compute` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
lon	double	-	Input longitude	degrees	[0, 360)
lat	double	-	Input latitude	degrees	[0, 360)

### 7.55.4 Output Parameters

The output parameters of the `xp_dem_compute` CFI function are:

*Table 193: Output parameters of `xp_dem_compute`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
alt	double	-	Altitude	meters	-
ierr	long	-	Error vector	-	-

### 7.55.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the `xp_dem_compute` CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library `xp_get_msg` (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the `xp_dem_compute` function by calling the function of the EXPLORER\_POINTING software library `xp_get_code` (see [GEN\_SUM]).

*Table 194: Error messages of `xp_dem_compute` function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Error getting cell altitude	No calculation performed	XP_CFI_DEM_COMPUTE_GET_CELL_ERR	0

### 7.55.6 Runtime Performances

The following runtime performances have been measured.

*Table 195: Runtime performances of xp\_dem\_compute*

Ultra Sparc II-400 [ms]
TBD

## 7.56 xp\_dem\_get\_id\_data

### 7.56.1 Overview

The **xp\_dem\_get\_id\_data** CFI function returns DEM initialization data.

### 7.56.2 Calling interface

The calling interface of the **xp\_dem\_get\_id\_data** CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_dem_id dem_id;
    long status;
    xp_dem_id_data data;
    status = xp_dem_get_id_data (&dem_id, &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.56.3 Input parameters

The **xp\_dem\_get\_id\_data** CFI function has the following input parameters:

*Table 196: Input parameters of xp\_dem\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
dem_id	xp_dem_id *	-	Structure that contains the DEM initialisation.	-	-

### 7.56.4 Output parameters

The output parameters of the **xp\_dem\_get\_id\_data** CFI function are:

*Table 197: Output parameters of xp\_dem\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_dem_get_id_data	long	-	Status flag	-	-

*Table 197: Output parameters of xp\_dem\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
data	xp_dem_id_data	-	DEM initialization data	-	-

### 7.56.5 Warnings and errors

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The dem\_id was not initialised.

### 7.56.6 Runtime performances

The following runtime performances have been estimated.

*Table 198: Runtime performances of xp\_dem\_get\_id\_data function*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.57 xp\_target\_inter

### 7.57.1 Overview

The **xp\_target\_inter** CFI function computes the first or the second intersection point of the line of sight from the satellite (defined by an elevation and an azimuth angle expressed in the selected Attitude Frame) with a surface located at a certain geodetic altitude over the Earth.

### 7.57.2 Calling Interface

The calling interface of the **xp\_target\_inter** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, inter_flag, iray;
    double los_az, los_el, geod_alt, los_az_rate, los_el_rate, freq;
    long ierr[XP_NUM_ERR_TARGET_INTER], status, num_user_target,
        num_los_target;

    status = xp_target_inter(&sat_id,
        &attitude_id,
        &atmos_id,
        &dem_id,
        &deriv, &inter_flag, &los_az, &los_el, &geod_alt,
        &los_az_rate, &los_el_rate, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_inter_run(&run_id,
        &attitude_id,
        &deriv, &inter_flag, &los_az, &los_el, &geod_alt,
        &los_az_rate, &los_el_rate, &iray, &freq,
        &num_user_target, &num_los_target,
```



```

    &target_id, ierr);

}

```

The `XP_NUM_ERR_TARGET_INTER` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```

#include <explorer_pointing.inc>
  INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID, TIME_REF
  INTEGER*4 DERIV, INTER_FLAG, IRAY
  REAL*8 TIME
  REAL*8 POS(3), VEL(3), ACC(3)
  REAL*8 LOS_AZ, LOS_EL, GEOD_ALT, LOS_AZ_RATE, LOS_EL_RATE, FREQ
  INTEGER*4 IERR(XP_NUM_ERR_TARGET_INTER), STATUS, NUM_USER_TARGET,
&          NUM_LOS_TARGET

  STATUS = XP_TARGET_INTER(SAT_ID, ATTITUDE_FRAME_ID,
&          INSTRUMENT_ID, TIME_REF,
&          TIME, POS, VEL, ACC, DERIV, INTER_FLAG,
&          LOS_AZ, LOS_EL, GEOD_ALT, LOS_AZ_RATE,
&          LOS_EL_RATE, IRAY, FREQ,
&          NUM_USER_TARGET, NUM_LOS_TARGET, IERR)

```

### 7.57.3 Input Parameters

The `xp_target_inter` CFI function has the following input parameters:

*Table 199: Input parameters of `xp_target_inter` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
inter_flag	long *	-	Flag for first or second intersection point selection	-	Allowed values: (1) XP_INTER_1ST (2) XP_INTER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
los_el	double *	-	Elevation of the LOS (Attitude Frame)	deg	$\geq -90$ $\leq 90$
geod_alt	double *	-	Geodetic altitude over the Earth	m	$\geq -b_{WGS}$
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-
los_el_rate	double *	-	Elevation-rate of the LOS (Attitude Frame)	deg/s	-
iray	long *	-	Ray tracing model switch	-	Accepted values: (0) XP_NO_REF (1) XP_STD_REF (2) XP_USER_REF
freq	double *	-	Frequency of the signal	Hz	$\geq 0$

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.
- Intersection flag: `inter_flag`. See current document, table 3.
- Ray tracing model switch: `iray`. See current document, table 3.

### 7.57.4 Output Parameters

The output parameters of the **xp\_target\_inter** CFI function are:

*Table 200: Output parameters of xp\_target\_inter*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.57.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_inter** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_inter** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 201: Error messages of xp\_target\_inter function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_INTER_ATTITUDE_STATUS_ERR	0
ERR	Intersection flag is not correct	No calculation performed	XP_CFI_TARGET_INTER_INTER_FLAG_ERR	1
ERR	Invalid Frequency	No calculation performed	XP_CFI_TARGET_INTER_FREQ_ERR	2
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_TARGET_INTER_ATM_NOT_INIT_ERR	3
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_TARGET_INTER_ATM_INIT_IRAY_COMPATIB_ERR	4
ERR	Time reference ID is not correct	No calculation performed	XP_CFI_TARGET_INTER_TIME_REF_ERR	5

*Table 201: Error messages of xp\_target\_inter function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_INTER_DERIV_FLAG_ERR	6
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_TARGET_INTER_IRAY_ID_ERR	7
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_INTER_INVALID_SV_ERR	8
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_TARGET_INTER_LOS_AZIMUTH_ERR	9
ERR	Invalid LOS Elevation	No calculation performed	XP_CFI_TARGET_INTER_LOS_ELEVATION_ERR	10
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_TARGET_INTER_GEODETTIC_ALT_ERR	11
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_INTER_MEMORY_ERR	12
ERR	Internal computation error # 3	No calculation performed	XP_CFI_TARGET_INTER_INITIAL_LOOK_DIR_OR_PLANE_ERR	13
ERR	Time Reference not initialised	No calculation performed	XP_CFI_TARGET_INTER_TIME_REF_INIT_ERR	14
ERR	No target was found	No calculation performed	XP_CFI_TARGET_INTER_TARGET_NOT_FOUND_ERR	15
ERR	Internal computation error # 4	No calculation performed	XP_CFI_TARGET_INTER_RANGE_OR_POINTING_CALC_ERR	16
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_INTER_INVALID_SV_WARN	23
WARN	Path from satellite to target occulted by the Earth	Calculation performed. A message informs the user.	XP_CFI_TARGET_INTER_NEGATIVE_ALTITUDE_WARN	24

### **7.57.6 Runtime Performances**

The following runtime performances have been measured.

*Table 202: Runtime performances of xp\_target\_inter*

<b>Ultra Sparc II-400 [ms]</b>
0.696

## 7.58 xp\_target\_ground\_range

### 7.58.1 Overview

The **xp\_target\_ground\_range** CFI function computes the location of a point that is placed on a surface at a certain geodetic altitude over the Earth, that lays on the plane defined by the satellite position, the nadir and a reference point, and that is at a certain distance or ground range measured along that surface from that reference point.

This reference point is calculated being the intersection of the previous surface with the line of sight defined by an elevation and azimuth angle in the selected Attitude Frame.

### 7.58.2 Calling Interface

The calling interface of the **xp\_target\_ground\_range** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv;
    double los_az, los_el, geod_alt, distance;
    double los_az_rate, los_el_rate;
    long ierr[XP_NUM_ERR_TARGET_GROUND_RANGE], status,
        num_user_target, num_los_target;

    status = xp_target_ground_range(&sat_id,
        &attitude_id,
        &dem_id,
        &deriv, &los_az,
        &los_el, &geod_alt, &distance, &los_az_rate,
        &los_el_rate, &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_ground_range_run(&run_id,
        &attitude_id,
        &deriv, &los_az,
```

```

    &los_el, &geod_alt, &distance, &los_az_rate,
    &los_el_rate, &num_user_target, &num_los_target,
    &target_id, ierr);
}

```

The XP\_NUM\_ERR\_TARGET\_GROUND\_RANGE constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```

#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&           TIME_REF, DERIV
    REAL*8 TIME
    REAL*8 POS(3), VEL(3), ACC(3)
    REAL*8 LOS_AZ, LOS_EL, GEOD_ALT, DISTANCE
    REAL*8 LOS_AZ_RATE, LOS_EL_RATE
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_GROUND_RANGE), STATUS,
&           NUM_USER_TARGET, NUM_LOS_TARGET

    STATUS = XP_TARGET_GROUND_RANGE(SAT_ID, ATTITUDE_FRAME_ID,
&                                  INSTRUMENT_ID, TIME_REF,
&                                  TIME, POS, VEL, ACC, DERIV, LOS_AZ,
&                                  LOS_EL, GEOD_ALT, DISTANCE, LOS_AZ_RATE,
&                                  LOS_EL_RATE, NUM_USER_TARGET,
&                                  NUM_LOS_TARGET, IERR)

```

### 7.58.3 Input Parameters

The `xp_target_ground_range` CFI function has the following input parameters:

*Table 203: Input parameters of `xp_target_ground_range` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
los_el	double *	-	Elevation of the LOS (Attitude Frame)	deg	$\geq -90$ $\leq 90$
geod_alt	double *	-	Geodetic altitude over the Earth (Earth fixed CS)	m	$\geq -b_{WGS}$
distance	double *	-	Distance or ground range to the reference point, positive from nadir in the azimuth direction (Earth Fixed CS)	m	-
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-
los_el_rate	double *	-	Elevation-rate of the LOS (Attitude Frame)	deg/s	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.

### 7.58.4 Output Parameters

The output parameters of the **xp\_target\_ground\_range** CFI function are:

*Table 204: Output parameters of xp\_target\_ground\_range*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.58.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_ground\_range** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_ground\_range** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 205: Error messages of xp\_target\_ground\_range function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_GR_RANGE_ATTITUDE_STATUS_ERR	0
ERR	Time reference ID is not correct	No calculation performed	XP_CFI_TARGET_GR_RANGE_TIME_REF_ERR	1
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_GR_RANGE_DERIV_FLAG_ERR	2
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_TARGET_GR_RANGE_LOS_AZIMUTH_ERR	3
ERR	Invalid LOS Elevation	No calculation performed	XP_CFI_TARGET_GR_RANGE_LOS_ELEVATION_ERR	4



*Table 205: Error messages of xp\_target\_ground\_range function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_TARGET_GR_RANGE_GEODETTIC_ALT_ERR	5
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_GR_RANGE_INVALID_SV_ERR	6
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_GR_RANGE_MEMORY_ERR	7
ERR	Internal computation error #3	No calculation performed	XP_CFI_TARGET_GR_RANGE_INITIAL_LOOK_DIRECTION_PLANE_ERR	8
ERR	Time reference is not initialized	No calculation performed	XP_CFI_TARGET_GR_RANGE_TIME_REF_INIT_ERR	9
ERR	No target was found	No calculation performed	XP_CFI_TARGET_GR_RANGE_TARGET_NOT_FOUND_ERR	10
ERR	Internal computation error #4	No calculation performed	XP_CFI_TARGET_GR_RANGE_RANGE_OR_POINTING_CALC_ERR	11
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_GR_RANGE_INVALID_SV_WARN	18

### 7.58.6 Runtime Performances

The following runtime performances have been measured.

*Table 206: Runtime performances of xp\_target\_ground\_range*

<b>Ultra Sparc II-400 [ms]</b>
0.624

## 7.59 xp\_target\_incidence\_angle

### 7.59.1 Overview

The **xp\_target\_incidence\_angle** CFI function computes the location of a point that is placed on a surface at a certain geodetic altitude over the Earth and that is seen from the satellite on a line of sight that forms a certain azimuth angle in the selected Attitude Frame and that intersects that surface with a certain incidence angle.

### 7.59.2 Calling Interface

The calling interface of the **xp\_target\_incidence\_angle** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv;
    double los_az, inc_angle, geod_alt, los_az_rate;
    long ierr[XP_NUM_ERR_TARGET_INCIDENCE_ANGLE], status,
        num_user_target, num_los_target;

    status = xp_target_incidence_angle(&sat_id,
        &attitude_id,
        &dem_id,
        &deriv, &los_az,
        &inc_angle, &geod_alt, &los_az_rate,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_incidence_angle_run(&run_id,
        &attitude_id,
        &deriv, &los_az,
        &inc_angle, &geod_alt, &los_az_rate,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}
```

}

The `XP_NUM_ERR_TARGET_INCIDENCE_ANGLE` constant is defined in the file *explorer\_pointing.h*. For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
      INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID, TIME_REF,
&      DERIV
      REAL*8 TIME
      REAL*8 POS(3), VEL(3), ACC(3)
      REAL*8 LOS_AZ, INC_ANGLE, GEOD_ALT, LOS_AZ_RATE
      INTEGER*4 IERR(XP_NUM_ERR_TARGET_INCIDENCE_ANGLE), STATUS,
&      NUM_USER_TARGET, NUM_LOS_TARGET

      STATUS = XP_TARGET_INCIDENCE_ANGLE(SAT_ID, ATTITUDE_FRAME_ID,
&      INSTRUMENT_ID,
&      TIME_REF, TIME, POS, VEL, ACC, DERIV,
&      LOS_AZ, INC_ANGLE, GEOD_ALT, LOS_AZ_RATE,
&      NUM_USER_TARGET, NUM_LOS_TARGET, IERR)
```

### 7.59.3 Input Parameters

The `xp_target_incidence_angle` CFI function has the following input parameters:

*Table 207: Input parameters of `xp_target_incidence_angle` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
inc_angle	double *	-	Incidence angle of the LOS (Earth fixed CS)	deg	$\geq 0$ $\leq 90$
geod_alt	double *	-	Geodetic altitude over the Earth (Earth fixed CS)	m	$\geq -b_{WGS}$
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.

### 7.59.4 Output Parameters

The output parameters of the **xp\_target\_incidence\_angle** CFI function are:

*Table 208: Output parameters of xp\_target\_incidence\_angle*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.59.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_incidence\_angle** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_incidence\_angle** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 209: Error messages of xp\_target\_incidence\_angle function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_INC_ANGLE_ATTITUDE_STATUS_ERR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_INC_ANGLE_DERIV_FLAG_ERR	1
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_TARGET_INC_ANGLE_LOS_AZIMUTH_ERR	2
ERR	Invalid Incidence Angle	No calculation performed	XP_CFI_TARGET_INC_ANGLE_INC_ANGLE_ERR	3
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_TARGET_INC_ANGLE_GEODETTIC_ALT_ERR	4

*Table 209: Error messages of xp\_target\_incidence\_angle function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_INC_ANGLE_INVALID_SV_ERR	5
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_INC_ANGLE_MEMORY_ERR	6
ERR	Internal computation error #3	No calculation performed	XP_CFI_TARGET_INC_ANGLE_INITIAL_LOOK_DIRECTION_PLANE_ERR	7
ERR	Time Reference not initialised	No calculation performed	XP_CFI_TARGET_INC_ANGLE_TIME_REF_INIT_ERR	8
ERR	No target was found	No calculation performed	XP_CFI_TARGET_INC_ANGLE_TARGET_NOT_FOUND_ERR	9
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_INC_ANGLE_INVALID_SV_WARN	11

### **7.59.6 Runtime Performances**

The following runtime performances have been measured.

*Table 210: Runtime performances of xp\_target\_incidence\_angle*

<b>Ultra Sparc II-400 [ms]</b>
1.064

## 7.60 xp\_target\_range

### 7.60.1 Overview

The **xp\_target\_range** CFI function computes the location of a point that is placed on a surface at a certain geodetic altitude over the Earth, that is seen from the satellite on a line of sight that forms a certain azimuth angle in the selected Attitude Frame, and that is at a certain range or slant-range from the satellite.

### 7.60.2 Calling Interface

The calling interface of the **xp\_target\_range** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv;
    double los_az, range, geod_alt, los_az_rate, range_rate;
    long ierr[XP_NUM_ERR_TARGET_RANGE], status, num_user_target,
        num_los_target;

    status = xp_target_range(&sat_id,
        &attitude_id,
        &dem_id,
        &deriv, &los_az, &range,
        &geod_alt, &los_az_rate, &range_rate,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_range_run(&run_id,
        &attitude_id,
        &deriv, &los_az, &range,
        &geod_alt, &los_az_rate, &range_rate,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}
```

The `XP_NUM_ERR_TARGET_RANGE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&           TIME_REF, DERIV
    REAL*8 TIME
    REAL*8 POS(3), VEL(3), ACC(3)
    REAL*8 LOS_AZ, RANGE, GEOD_ALT, LOS_AZ_RATE, RANGE_RATE
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_RANGE), STATUS, NUM_USER_TARGET,
&           NUM_LOS_TARGET

    STATUS = XP_TARGET_RANGE(SAT_ID, ATTITUDE_FRAME_ID,
&                           INSTRUMENT_ID, TIME_REF,
&                           TIME, POS, VEL, ACC, DERIV, LOS_AZ,
&                           RANGE, GEOD_ALT, LOS_AZ_RATE,
&                           RANGE_RATE, NUM_USER_TARGET,
&                           NUM_LOS_TARGET, IERR)
```



### 7.60.3 Input Parameters

The `xp_target_range` CFI function has the following input parameters:

*Table 211: Input parameters of `xp_target_range` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
range	double *	-	Range to the satellite (Earth fixed CS)	m	$> 0$
geod_alt	double *	-	Geodetic altitude over the Earth	m	$\geq -b_{WGS}$
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-
range_rate	double *	-	Range-rate to the satellite (Earth fixed CS)	m/s	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: deriv. See current document, table 3.

### 7.60.4 Output Parameters

The output parameters of the **xp\_target\_range** CFI function are:

*Table 212: Output parameters of xp\_target\_range*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.60.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_range** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_range** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 213: Error messages of xp\_target\_range function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_RANGE_ATTITUDE_STATUS_ERROR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_RANGE_DERIV_FLAG_ERROR	1
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_TARGET_RANGE_LOS_AZIMUTH_ERROR	2
ERR	Invalid Range	No calculation performed	XP_CFI_TARGET_RANGE_RANGE_ERROR	3
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_TARGET_RANGE_GEODETTIC_ALT_ERROR	4
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_RANGE_INVALID_SV_ERROR	5

*Table 213: Error messages of xp\_target\_range function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_RANGE_MEMORY_ERR	6
ERR	Internal computation error #3	No calculation performed	XP_CFI_TARGET_RANGE_INITIAL_LOOK_DIRECTION_PLANE_ERR	7
ERR	Could not perform a time transformation	No calculation performed	XP_CFI_TARGET_RANGE_TIME_TRANSFORMATION_ERR	8
ERR	No target was found	No calculation performed	XP_CFI_TARGET_RANGE_TARGET_NOT_FOUND_ERR	9
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_RANGE_INVALID_SV_WARN	11

### 7.60.6 Runtime Performances

The following runtime performances have been measured.

*Table 214: Runtime performances of xp\_target\_range*

<b>Ultra Sparc II-400 [ms]</b>
0.198

## 7.61 xp\_target\_range\_rate

### 7.61.1 Overview

The **xp\_target\_range\_rate** CFI function computes the location of a point that is placed on a surface at a certain geodetic altitude over the Earth, that is at a certain range from the satellite, and whose associated Earth-fixed target has a certain range-rate value.

### 7.61.2 Calling Interface

The calling interface of the **xp\_target\_range\_rate** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv;
    double ef_range_rate, range, geod_alt;
    double ef_range_rate_rate, range_rate;
    long ierr[XP_NUM_ERR_TARGET_RANGE_RATE], status, num_user_target,
        num_los_target;

    status = xp_target_range_rate(&sat_id,
        &attitude_id,
        &dem_id,
        &deriv, &ef_range_rate, &range,
        &geod_alt, &ef_range_rate_rate, &range_rate,
        &num_user_target, &num_los_target, &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_range_rate_run(&run_id,
        &attitude_id,
        &deriv, &ef_range_rate, &range,
        &geod_alt, &ef_range_rate_rate, &range_rate,
        &num_user_target, &num_los_target, &target_id, ierr);
}
```

The `XP_NUM_ERR_TARGET_RANGE_RATE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
      INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&      TIME_REF, DERIV
      REAL*8 TIME
      REAL*8 POS(3), VEL(3), ACC(3)
      REAL*8 EF_RANGE_RATE, RANGE, GEOD_ALT
      REAL*8 EF_RANGE_RATE_RATE, RANGE_RATE
      INTEGER*4 IERR(XP_NUM_ERR_TARGET_RANGE_RATE), STATUS,
&      NUM_USER_TARGET, NUM_LOS_TARGET

      STATUS = XP_TARGET_RANGE_RATE(SAT_ID, ATTITUDE_FRAME_ID,
&      INSTRUMENT_ID, TIME_REF,
&      TIME, POS, VEL, ACC, DERIV,
&      EF_RANGE_RATE, RANGE, GEOD_ALT,
&      EF_RANGE_RATE_RATE, RANGE_RATE,
&      NUM_USER_TARGET, NUM_LOS_TARGET, IERR)
```

### 7.61.3 Input Parameters

The `xp_target_range_rate` CFI function has the following input parameters:

Table 215: Input parameters of `xp_target_range_rate` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
attitude_frame_id	long *	-	Attitude Frame ID	-	Complete
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
ef_range_rate	double *	-	Range-rate of the related Earth-fixed target (Earth fixed CS)	m/s	-
range	double *	-	Range or slant-range from target to satellite (Earth fixed CS)	m	> 0
geod_alt	double *	-	Geodetic altitude over the Earth	m	>= -b <sub>WGS</sub>
ef_range_rate_rate	double *	-	Range-rate-rate of the related Earth-fixed target (Earth fixed CS)	m/s <sup>2</sup>	-
range_rate	double *	-	Range-rate from target to satellite (Earth fixed CS)	m/s	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.

### 7.61.4 Output Parameters

The output parameters of the **xp\_target\_range\_rate** CFI function are:

Table 216: Output parameters of *xp\_target\_range\_rate*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.61.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_range\_rate** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_range\_rate** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

Table 217: Error messages of *xp\_target\_range\_rate* function

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_RANGE_RATE_ATTITUDE_STATUS_ERR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_RANGE_RATE_DERIV_FLAG_ERR	1
ERR	Invalid Range	No calculation performed	XP_CFI_TARGET_RANGE_RATE_RANGE_ERR	2
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_TARGET_RANGE_RATE_GEODETTIC_ALT_ERR	3
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_RANGE_RATE_INVALID_SV_ERR	4

*Table 217: Error messages of xp\_target\_range\_rate function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_RANGE_RATE_MEMORY_ERR	5
ERR	Time Reference not initialised	No calculation performed	XP_CFI_TARGET_RANGE_RATE_TIME_REF_INIT_ERR	6
ERR	Internal computation error #3	No calculation performed	XP_CFI_TARGET_RANGE_RATE_INITIAL_LOOK_DIR_OR_PLANE_ERR	7
ERR	No target was found	No calculation performed	XP_CFI_TARGET_RANGE_RATE_TARGET_NOT_FOUND_ERR	8
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_RANGE_RATE_INVALID_SV_WARN	9

### 7.61.6 Runtime Performances

The following runtime performances have been measured.

*Table 218: Runtime performances of xp\_target\_range\_rate*

<b>Ultra Sparc II-400 [ms]</b>
0.220



## 7.62 xp\_target\_tangent

### 7.62.1 Overview

The **xp\_target\_tangent** CFI function computes the location of the tangent point over the Earth that is located on the line of sight defined by an elevation and azimuth angles expressed in the selected Attitude Frame.

### 7.62.2 Calling Interface

The calling interface of the **xp\_target\_tangent** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, iray;
    double los_az, los_el, los_az_rate, los_el_rate, freq;
    long ierr[XP_NUM_ERR_TARGET_TANGENT], status, num_user_target,
        num_los_target;

    status = xp_target_tangent(&sat_id,
                               &attitude_id,
                               &atmos_id,
                               &dem_id,
                               &deriv, &los_az, &los_el,
                               &los_az_rate, &los_el_rate, &iray, &freq,
                               &num_user_target, &num_los_target,
                               &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_tangent_run(&run_id,
                                   &attitude_id,
                                   &deriv, &los_az, &los_el,
                                   &los_az_rate, &los_el_rate, &iray, &freq,
                                   &num_user_target, &num_los_target,
```

```

        &target_id, ierr);
    }

```

The `XP_NUM_ERR_TARGET_TANGENT` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```

#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&            TIME_REF, DERIV, IRAY
    REAL*8 TIME
    REAL*8 POS(3), VEL(3), ACC(3)
    REAL*8 LOS_AZ, LOS_EL, LOS_AZ_RATE, LOS_EL_RATE, FREQ
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_TANGENT), STATUS,
&            NUM_USER_TARGET, NUM_LOS_TARGET

    STATUS = XP_TARGET_TANGENT(SAT_ID, ATTITUDE_FRAME_ID,
&                               INSTRUMENT_ID, TIME_REF,
&                               TIME, POS, VEL, ACC, DERIV, LOS_AZ,
&                               LOS_EL, LOS_AZ_RATE, LOS_EL_RATE,
&                               IRAY, FREQ, NUM_USER_TARGET,
&                               NUM_LOS_TARGET, IERR)

```

### 7.62.3 Input Parameters

The `xp_target_tangent` CFI function has the following input parameters:

*Table 219: Input parameters of `xp_target_tangent` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
los_el	double *	-	Elevation of the LOS (Attitude Frame)	deg	$\geq -90$ $\leq 90$
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-
los_el_rate	double *	-	Elevation-rate of the LOS (Attitude Frame)	deg/s	-
iray	long *	-	Ray tracing model switch	-	Accepted values: All (see table 3)
freq	double *	-	Frequency of the signal	Hz	$\geq 0$

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.
- Ray tracing model switch: `iray`. See current document, table 3.

## 7.62.4 Output Parameters

The output parameters of the **xp\_target\_tangent** CFI function are:

*Table 220: Output parameters of xp\_target\_tangent*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

## 7.62.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_tangent** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_tangent** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 221: Error messages of xp\_target\_tangent function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_TANGENT_ATTITUDE_STATUS_ERROR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_TANGENT_DERIV_FLAG_ERROR	1
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_TARGET_TANGENT_LOS_AZIMUTH_ERROR	2
ERR	Invalid LOS Elevation	No calculation performed	XP_CFI_TARGET_TANGENT_LOS_ELEVATION_ERROR	3
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_TARGET_TANGENT_IRAY_ID_ERROR	4
ERR	Invalid Frequency	No calculation performed	XP_CFI_TARGET_TANGENT_FREQ_ERROR	5

*Table 221: Error messages of xp\_target\_tangent function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_TARGET_TANGENT_ATM_NOT_INIT_ERR	6
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_TARGET_TANGENT_ATM_INIT_IRAY_COMPATIB_ERR	7
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_TANGENT_INVALID_SV_ERR	8
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_TANGENT_MEMORY_ERR	9
ERR	Internal computation error # 3	No calculation performed	XP_CFI_TARGET_TANGENT_INITIAL_LOOK_DIRECTION_PLANE_ERR	10
ERR	Time Reference not initialised	No calculation performed	XP_CFI_TARGET_TANGENT_TIME_REF_INIT_ERR	11
ERR	No target was found	No calculation performed	XP_CFI_TARGET_TANGENT_TARGET_NOT_FOUND_ERR	12
ERR	Tangent point is behind looking direction	No calculation performed	XP_CFI_TARGET_TANGENT_TG_PT_BEHIND_LOOK_DIR_ERR	13
ERR	Internal computation error # 4	No calculation performed	XP_CFI_TARGET_TANGENT_RANGE_OR_POINTING_CALC_ERR	14
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_TANGENT_INVALID_SV_WARN	15
WARN	Path from satellite to target occulted by the Earth	Calculation performed. A message informs the user.	XP_CFI_TARGET_TANGENT_NEGATIVE_ALTITUDE_WARN	16
WARN	Tangent point latitude is outside the selected corrective function latitude band	Calculation performed. A message informs the user.	XP_CFI_TARGET_TANGENT_PRED_WRONG_LAT_WARN	17

### 7.62.6 Runtime Performances

The following runtime performances have been measured.

*Table 222: Runtime performances of xp\_target\_tangent*

<b>Ultra Sparc II-400 [ms]</b>
0.746

## 7.63 xp\_target\_altitude

### 7.63.1 Overview

The **xp\_target\_altitude** CFI function computes the location of the tangent point over the Earth that is located on a surface at a certain geodetic altitude over the Earth and that is on a line of sight that forms a certain azimuth angle in the selected Attitude Frame.

### 7.63.2 Calling Interface

The calling interface of the **xp\_target\_altitude** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, iray;
    double los_az, geod_alt, los_az_rate, freq;
    long ierr[XP_NUM_ERR_TARGET_ALTITUDE], status, num_user_target,
        num_los_target;

    status = xp_target_altitude(sat_id,
        &attitude_id,
        &atmos_id,
        &dem_id,
        &deriv, &los_az, &geod_alt,
        &los_az_rate, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_altitude_run(run_id,
        &attitude_id,
        &deriv, &los_az, &geod_alt,
        &los_az_rate, &iray, &freq,
        &num_user_target, &num_los_target,
```

```

        &target_id, ierr);
    }

```

The `XP_NUM_ERR_TARGET_ALTITUDE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```

#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&            TIME_REF, DERIV, IRAY
    REAL*8 TIME, POS(3), VEL(3), ACC(3)
    REAL*8 LOS_AZ, GEOD_ALT, LOS_AZ_RATE, FREQ
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_ALTITUDE), STATUS,
&            NUM_USER_TARGET, NUM_LOS_TARGET

    STATUS = XP_TARGET_ALTITUDE(SAT_ID, ATTITUDE_FRAME_ID,
&                               INSTRUMENT_ID, TIME_REF,
&                               TIME, POS, VEL, ACC, DERIV, LOS_AZ,
&                               GEOD_ALT, LOS_AZ_RATE, IRAY, FREQ,
&                               NUM_USER_TARGET, NUM_LOS_TARGET, IERR)

```

### 7.63.3 Input Parameters

The `xp_target_altitude` CFI function has the following input parameters:

*Table 223: Input parameters of `xp_target_altitude` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
geod_alt	double *	-	Geodetic altitude over the Earth	m	$\geq -b_{WGS}$
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-
iray	long *	-	Ray tracing model switch	-	Accepted values: All (see table 3)
freq	double *	-	Frequency of the signal	Hz	$\geq 0$

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.
- Ray tracing model switch: `iray`. See current document, table 3.



### 7.63.4 Output Parameters

The output parameters of the **xp\_target\_altitude** CFI function are:

Table 224: Output parameters of *xp\_target\_altitude*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.63.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_altitude** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_altitude** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

Table 225: Error messages of *xp\_target\_altitude* function

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_ALT_ATTITUDE_STATUS_ERR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_ALT_DERIV_FLAG_ERR	1
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_TARGET_ALT_LOS_AZIMUTH_ERR	2
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_TARGET_ALT_GEODETTIC_ALT_ERR	3
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_TARGET_ALT_IRRAY_ID_ERR	4
ERR	Invalid Frequency	No calculation performed	XP_CFI_TARGET_ALT_FREQUENCY_ERR	5
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_TARGET_ALT_ATM_NOT_INIT_ERR	6

*Table 225: Error messages of xp\_target\_altitude function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_TARGET_ALT_ATM_INIT_IRAY_COMPATIB_ERR	7
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_ALT_INVALID_SV_ERR	8
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_ALT_MEMORY_ERR	9
ERR	Time Reference not initialised	No calculation performed	XP_CFI_TARGET_ALT_TIME_REF_INIT_ERR	10
ERR	Internal computation error #3	No calculation performed	XP_CFI_TARGET_ALT_INITIAL_LOOK_DIR_OR_PLANE_ERR	11
ERR	No target was found	No calculation performed	XP_CFI_TARGET_ALT_TARGET_NOT_FOUND_ERR	12
ERR	Internal computation error #4	No calculation performed	XP_CFI_TARGET_ALT_RANGE_OR_POINTING_CALC_ERR	13
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_TARGET_ALT_INVALID_SV_WARN	14
WARN	Path from satellite to target occulted by the Earth	Calculation performed. A message informs the user.	XP_CFI_TARGET_ALT_NEGATIVE_ALTITUDE_WARN	15
WARN	Tangent point latitude is outside the selected corrective function latitude band	Calculation performed. A message informs the user.	XP_CFI_TARGET_ALT_PRED_WRONG_LAT_WARN	16

### **7.63.6 Runtime Performances**

The following runtime performances have been measured.

*Table 226: Runtime performances of xp\_target\_altitude*

<b>Ultra Sparc II-400 [ms]</b>
0.716

## 7.64 xp\_target\_star

### 7.64.1 Overview

The **xp\_target\_star** CFI function computes the location of the tangent point over the Earth that is located on the line of sight that points to a star defined by its right ascension and declination coordinates.

### 7.64.2 Calling Interface

The calling interface of the **xp\_target\_star** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, iray;
    double star_ra, star_dec, star_ra_rate, star_dec_rate, freq;
    long ierr[XP_NUM_ERR_TARGET_STAR], status, num_user_target,
        num_los_target;

    status = xp_target_star(&sat_id,
        &attitude_id,
        &atmos_id,
        &dem_id,
        &deriv, &star_ra, star_dec,
        &star_ra_rate, &star_dec_rate, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_star_run(&run_id,
        &attitude_id,
        &deriv, &star_ra, star_dec,
        &star_ra_rate, &star_dec_rate, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}
```

}

The XP\_NUM\_ERR\_TARGET\_STAR constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```
#include <explorer_pointing.inc>
      INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&      TIME_REF, DERIV, IRAY
      REAL*8 TIME, POS(3), VEL(3), ACC(3)
      REAL*8 LOS_AZ, LOS_EL, GEOD_ALT, LOS_AZ_RATE, LOS_EL_RATE, FREQ
      INTEGER*4 IERR(XP_NUM_ERR_TARGET_STAR), STATUS, NUM_USER_TARGET,
&      NUM_LOS_TARGET

      STATUS = XP_TARGET_STAR(SAT_ID, ATTITUDE_FRAME_ID,
&      INSTRUMENT_ID, TIME_REF,
&      TIME, POS, VEL, ACC, DERIV, STAR_RA,
&      STAR_DEC, STAR_RA_RATE, STAR_DEC_RATE,
&      IRAY, FREQ, NUM_USER_TARGET,
&      NUM_LOS_TARGET, IERR)
```

### 7.64.3 Input Parameters

The `xp_target_star` CFI function has the following input parameters:

*Table 227: Input parameters of `xp_target_star` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
star_ra	double *	-	Right ascension of the star (True of Date CS)	deg	$\geq 0$ $< 360$
star_dec	double *	-	Declination of the star (True of Date CS)	deg	$\geq -90$ $\leq +90$
star_ra_rate	double *	-	Right ascension rate of the star (True of Date CS)	deg/s	-
star_dec_rate	double *	-	Declination rate of the star (True of Date CS)	deg/s	-
iray	long *	-	Ray tracing model switch	-	Accepted values: All (see table 3)
freq	double *	-	Frequency of the signal	Hz	$\geq 0$

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.
- Ray tracing model switch: `iray`. See current document, table 3.

### 7.64.4 Output Parameters

The output parameters of the **xp\_target\_star** CFI function are:

*Table 228: Output parameters of xp\_target\_star*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.64.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_star** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_star** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 229: Error messages of xp\_target\_star function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_STAR_ATTITUDE_STATUS_ERR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_STAR_DERIV_FLAG_ERR	1
ERR	Invalid Right Ascension of the star	No calculation performed	XP_CFI_TARGET_STAR_RA_ERR	2
ERR	Invalid Declination of the star	No calculation performed	XP_CFI_TARGET_STAR_DEC_ERR	3
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_TARGET_STAR_IRAY_ID_ERR	4
ERR	Invalid Frequency	No calculation performed	XP_CFI_TARGET_STAR_FREQ_REQ_ERR	5
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_TARGET_STAR_ATM_NOT_INIT_ERR	6

*Table 229: Error messages of xp\_target\_star function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_TARGET_STAR_A TM_INIT_IRAY_COMPATIB_ERR	7
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_STAR_I NVALID_SV_ERR	8
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_STAR_ MEMORY_ERR	9
ERR	Internal computation error # 3	No calculation performed	XP_CFI_TARGET_STAR_I NITIAL_LOOK_DIR_OR_P LANE_ERR	10
ERR	Time reference ID is not correct	No calculation performed	XP_CFI_TARGET_STAR_T IME_REF_INIT_ERR	11
ERR	No target was found	No calculation performed	XP_CFI_TARGET_STAR_T ARGET_NOT_FOUND_ER R	12
ERR	Tangent point is behind looking direction	No calculation performed	XP_CFI_TARGET_STAR_T G_PT_BEHIND_LOOK_DIR _ERR	13
ERR	Internal computation error # 4	No calculation performed	XP_CFI_TARGET_STAR_R ANGE_OR_POINTING_CA LC_ERR	14
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_STAR_I NVALID_SV_WARN	15
WARN	Path from satellite to target occulted by the Earth	Calculation performed. A message informs the user.	XP_CFI_TARGET_STAR_N EGATIVE_ALTITUDE_WA RN	16
WARN	Tangent point latitude is outside the selected corrective function latitude band	Calculation performed. A message informs the user.	XP_CFI_TARGET_STAR_P RED_WRONG_LAT_WAR N	17

### 7.64.6 Runtime Performances

The following runtime performances have been measured.

*Table 230: Runtime performances of xp\_target\_star*

<b>Ultra Sparc II-400 [ms]</b>
0.750

## 7.65 xp\_target\_station

### 7.65.1 Overview

The **xp\_target\_station** CFI function computes the most relevant observation parameters of the link between the satellite and a ground station.

### 7.65.2 Calling Interface

The calling interface of the **xp\_target\_station** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv;
    double geoc_long, geod_lat, geod_alt, min_link_el;
    long ierr[XP_NUM_ERR_TARGET_STATION], status, num_user_target,
        num_los_target;

    status = xp_target_station(&sat_id,
        &attitude_id,
        &dem_id,
        &deriv, &geoc_long, &geod_lat,
        &geod_alt, &min_link_el,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_station_run(&run_id,
        &attitude_id,
        &deriv, &geoc_long, &geod_lat,
        &geod_alt, &min_link_el,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}
```



The `XP_NUM_ERR_TARGET_STATION` constant is defined in the file *explorer\_pointing.h*.

For ForTran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&           TIME_REF, DERIV
    REAL*8 TIME
    REAL*8 POS(3), VEL(3), ACC(3)
    REAL*8 GEOC_LONG, GEOD_LAT, GEOD_ALT, MIN_LINK_EL
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_STATION), STATUS,
&           NUM_USER_TARGET, NUM_LOS_TARGET

    STATUS = XP_TARGET_STATION(SAT_ID, ATTITUDE_FRAME_ID,
&                               INSTRUMENT_ID, TIME_REF,
&                               TIME, POS, VEL, ACC, DERIV, GEOC_LONG,
&                               GEOD_LAT, GEOD_ALT, MIN_LINK_EL,
&                               NUM_USER_TARGET, NUM_LOS_TARGET, IERR)
```

### 7.65.3 Input Parameters

The `xp_target_station` CFI function has the following input parameters:

*Table 231: Input parameters of `xp_target_station` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
geoc_long	double *	-	GS geocentric longitude (Earth fixed CS)	deg	$\geq 0$ $< 360$
geod_lat	double *	-	GS geodetic latitude (Earth fixed CS)	deg	$\geq -90$ $\leq 90$
geod_alt	double *	-	GS geodetic altitude (Earth fixed CS)	m	$\geq -b_{WGS}$
min_link_el	double *	-	GS minimum link elevation (Topocentric CS)	deg	$\geq -90$ $\leq 90$

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.

### 7.65.4 Output Parameters

The output parameters of the **xp\_target\_station** CFI function are:

*Table 232: Output parameters of xp\_target\_station*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.65.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_station** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_station** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 233: Error messages of xp\_target\_station function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_STATION_ATTITUDE_STATUS_ERROR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_STATION_DERIV_FLAG_ERROR	1
ERR	Invalid GS Geocentric Longitude	No calculation performed	XP_CFI_TARGET_STATION_GEOC_LONG_ERROR	2
ERR	Invalid GS Geodetic Latitude	No calculation performed	XP_CFI_TARGET_STATION_GEOD_LAT_ERROR	3
ERR	Invalid GS Geodetic Altitude	No calculation performed	XP_CFI_TARGET_STATION_GEODETTIC_ALT_ERROR	4
ERR	Invalid GS Minimum Link Elevation	No calculation performed	XP_CFI_TARGET_STATION_MIN_LINK_EL_ERROR	5
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_STATION_INVALID_SV_ERROR	6

*Table 233: Error messages of xp\_target\_station function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_STATION_MEMORY_ERR	7
ERR	Internal computation error #3	No calculation performed	XP_CFI_TARGET_STATION_STAVIS_COMP_FAILED_ERR	8
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_STATION_INVALID_SV_WARN	17

### **7.65.6 Runtime Performances**

The following runtime performances have been measured.

*Table 234: Runtime performances of xp\_target\_station*

<b>Ultra Sparc II-400 [ms]</b>
0.350

## 7.66 xp\_target\_drs

### 7.66.1 Overview

The **xp\_target\_drs** CFI function computes the most relevant observation parameters of the link between the satellite and a Data Relay Satellite (DRS).

### 7.66.2 Calling Interface

The calling interface of the **xp\_target\_drs** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv;
    double drs_pos[3], drs_vel[3];
    long ierr[XP_NUM_ERR_TARGET_DRS], status, num_user_target,
        num_los_target;

    status = xp_target_drs(&sat_id,
        &attitude_id,
        &dem_id,
        &deriv, &drs_pos, &drs_vel,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_drs_run(&run_id,
        &attitude_id,
        &deriv, &drs_pos, &drs_vel,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}
```

The `XP_NUM_ERR_TARGET_DRS` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined,

note that the C preprocessor must be used because of the presence of the #include statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&
    TIME_REF, DERIV
    REAL*8 TIME
    REAL*8 POS(3), VEL(3), ACC(3), DRS_POS(3), DRS_VEL(3)
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_DRS), STATUS, NUM_USER_TARGET,
&
    NUM_LOS_TARGET

    STATUS = XP_TARGET_DRS(SAT_ID, ATTITUDE_FRAME_ID,
&
    INSTRUMENT_ID, TIME_REF,
&
    TIME, POS, VEL, ACC, DERIV, DRS_POS,
&
    DRS_VEL, NUM_USER_TARGET,
&
    NUM_LOS_TARGET, IERR)
```

### 7.66.3 Input Parameters

The `xp_target_drs` CFI function has the following input parameters:

*Table 235: Input parameters of xp\_target\_drs function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
drs_pos	double[3]	[0-2]	DRS position vector (Earth Fixed CS)	m	-
drs_vel	double[3]	[0-2]	DRS velocity vector (Earth Fixed CS)	m/s	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: deriv. See current document, table 3.

### 7.66.4 Output Parameters

The output parameters of the **xp\_target\_drs** CFI function are:

*Table 236: Output parameters of xp\_target\_drs*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.66.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_drs** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_drs** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 237: Error messages of xp\_target\_drs function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_DRS_ATTITUDE_STATUS_ERR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_DRS_DERIV_FLAG_ERR	1
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_DRS_INVALID_SV_ERR	2
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_DRS_MEMORY_ERR	3
ERR	Input DRS state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_DRS_INVALID_DRS_SV_ERR	4
ERR	Internal computation error #3	No calculation performed	XP_CFI_TARGET_DRS_DRSVIS_COMP_FAILED_ERR	5

*Table 237: Error messages of xp\_target\_drs function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_DRS_INVALID_SV_WARN	6
WARN	Input DRS state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_DRS_INVALID_DRS_SV_WARN	7
WARN	Path from Satellite to DRS occulted by the Earth	Calculation performed. A message informs the user.	XP_CFI_TARGET_DRS_NEGATIVE_TANG_DRS_ALT_WARN	8
WARN	Internal computation warning # 1	Calculation performed. A message informs the user.	XP_CFI_TARGET_DRS_NEGATIVE_TANG_SUN_ALT_WARN	9
WARN	Internal computation warning # 2	Calculation performed. A message informs the user.	XP_CFI_TARGET_DRS_TANGENT_DRS_NOT_VALID_WARN	10
WARN	Internal computation warning # 3	Calculation performed. A message informs the user.	XP_CFI_TARGET_DRS_TANGENT_SUN_NOT_VALID_WARN	11

### **7.66.6 Runtime Performances**

The following runtime performances have been measured.

*Table 238: Runtime performances of xp\_target\_drs*

<b>Ultra Sparc II-400 [ms]</b>
0.800



## 7.67 xp\_target\_generic

### 7.67.1 Overview

The **xp\_target\_generic** CFI function allows the user to provide the target location (position and velocity) and later calculate extra results from it.

### 7.67.2 Calling Interface

The calling interface of the **xp\_target\_generic** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv;
    double targ_pos[3], targ_vel[3], targ_acc[3];
    long ierr[XP_NUM_ERR_TARGET_GENERIC], status, num_user_target,
        num_los_target;

    status = xp_target_generic(&sat_id,
        &attitude_id,
        &dem_id,
        &deriv, targ_pos, targ_vel, targ_acc,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_generic_run(&run_id,
        &attitude_id,
        &deriv, targ_pos, targ_vel, targ_acc,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}
```

The `XP_NUM_ERR_TARGET_GENERIC` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID
    INTEGER*4 TIME_REF, DERIV
    REAL*8 TIME
    REAL*8 POS(3), VEL(3), ACC(3), TARG_POS(3), TARG_VEL(3)
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_GENERIC), STATUS,
&
    NUM_USER_TARGET, NUM_LOS_TARGET

    STATUS = XP_TARGET_GENERIC(SAT_ID, ATTITUDE_FRAME_ID,
&
    INSTRUMENT_ID, TIME_REF,
&
    TIME, POS, VEL, ACC, DERIV, TARG_POS,
&
    TARG_VEL, NUM_USER_TARGET,
&
    NUM_LOS_TARGET, IERR)
```

### 7.67.3 Input Parameters

The `xp_target_generic` CFI function has the following input parameters:

*Table 239: Input parameters of xp\_target\_generic function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
targ_pos	double[3]	[0-2]	Target position vector (Earth Fixed CS)	m	-
targ_vel	double[3]	[0-2]	Target velocity vector (Earth Fixed CS)	m/s	-
targ_acc	double[3]	[0-2]	Target acceleration vector (Earth Fixed CS)	m/s <sup>2</sup>	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: deriv. See current document, table 3.

### 7.67.4 Output Parameters

The output parameters of the **xp\_target\_generic** CFI function are:

*Table 240: Output parameters of xp\_target\_generic*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.67.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_generic** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_generic** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 241: Error messages of xp\_target\_generic function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_GENERIC_ATTITUDE_STATUS_ERR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_GENERIC_DERIV_FLAG_ERR	1
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_GENERIC_INVALID_SV_ERR	2
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_GENERIC_MEMORY_ERR	3
ERR	Internal computation error # 3	No calculation performed	XP_CFI_TARGET_GENERIC_INITIAL_LOOK_DIR_OR_PLANE_ERR	4

*Table 241: Error messages of xp\_target\_generic function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_GENERIC_INVALID_SV_WARN	14

### **7.67.6 Runtime Performances**

The following runtime performances have been measured.

*Table 242: Runtime performances of xp\_target\_generic*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.68 xp\_target\_reflected

### 7.68.1 Overview

The **xp\_target\_reflected** CFI function allows the user to compute, from S/C position and attitude, and emitting source position, the point of reflection from the source towards the SC at a certain geodetic altitude.

### 7.68.2 Calling Interface

The calling interface of the **xp\_target\_reflected** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, source_type;
    double geod_alt, deflection_north, deflection_east,
           source_param[XP_NUM_SOURCE_PARAM];
    long ierr[XP_NUM_ERR_TARGET_REFLECTED], status, num_user_target,
         num_los_target;

    status = xp_target_reflected( /* inputs */
        &sat_id, &attitude_id, &deriv, &geod_alt,
        &deflection_north, &deflection_east,
        &source_type, source_param,
        /* outputs */
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_reflected_run( /* inputs */
        &run_id,
        &attitude_id, &deriv, &geod_alt,
        &deflection_north, &deflection_east,
        &source_type, source_param,
        /* outputs */
        &num_user_target, &num_los_target,
```

```

    &target_id, ierr);
}

```

The `XP_NUM_ERR_TARGET_GENERIC` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
```

TBD

### 7.68.3 Input Parameters

The `xp_target_reflected` CFI function has the following input parameters:

*Table 243: Input parameters of xp\_target\_reflected function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
geod_lat	double *	-	GS geodetic latitude (Earth fixed CS)	deg	>= -90 <= 90
deflection_north	double *	-	North-South component of the vertical deflection	deg	>= -90 <= 90
deflection_east	double *	-	East-West component of the vertical deflection	deg	>= -90 <= 90
source_type	long *	-	The type of source	-	Allowed values: XP_SOURCE_STAR XP_SOURCE_SUN XP_SOURCE_MOON XP_SOURCE_GENERIC
source_param	double[XP_NUM_SOURCE_PARAM]	[0-5]	if XP_SRC_STAR is selected, source_param = [ra, dec, parallax, 0.0, 0.0, 0.0] if XP_SOURCE_GENERIC source_param = [x,y,z,vx,vy,vz] position and velocity in EF else dummy values.	-	-

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: deriv. See current document, table 3.
- Source Identification: source\_type. See current document, table 3.

### 7.68.4 Output Parameters

The output parameters of the **xp\_target\_reflected** CFI function are:

*Table 244: Output parameters of xp\_target\_reflected*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.68.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_reflected** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_reflected** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 245: Error messages of xp\_target\_reflected function*

Error type	Error message	Cause and impact	Error code	Error No
	TBD			

### 7.68.6 Runtime Performances

The following runtime performances have been measured.

*Table 246: Runtime performances of xp\_target\_reflected*

Ultra Sparc II-400 [ms]
TBD

## 7.69 xp\_target\_travel\_time

### 7.69.1 Overview

The **xp\_target\_travel\_time** CFI function computes the point of the line of sight from the satellite (defined by an elevation and an azimuth angle expressed in the selected Attitude Frame) at a given travel time along the (curved) line of sight.

### 7.69.2 Calling Interface

The calling interface of the **xp\_target\_travel\_time** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, iray;
    double los_az, los_el, travel_time
    double los_az_rate, los_el_rate, travel_time_rate, freq;
    long ierr[XP_NUM_ERR_TARGET_TRAVEL_TIME], status,
        num_user_target, num_los_target;

    status = xp_target_travel_time(&sat_id,
        &attitude_id,
        &atmos_id,
        &dem_id,
        &deriv, &los_az,
        &los_el, &travel_time, &los_az_rate, &los_el_rate,
        &travel_time_rate, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_travel_time_run(&run_id,
        &attitude_id,
        &deriv, &los_az,
```



```

    &los_el, &travel_time, &los_az_rate, &los_el_rate,
    &travel_time_rate, &iray, &freq,
    &num_user_target, &num_los_target,
    &target_id, ierr);
}

```

The `XP_NUM_ERR_TARGET_TRAVEL_TIME` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```

#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID, TIME_REF
    INTEGER*4 DERIV, IRAY
    REAL*8 TIME
    REAL*8 POS(3), VEL(3), ACC(3)
    REAL*8 LOS_AZ, LOS_EL, TRAVEL_TIME,
    REAL*8 LOS_AZ_RATE, LOS_EL_RATE, TRAVEL_TIME_RATE, FREQ
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_TRAVEL_TIME), STATUS,
&        NUM_USER_TARGET, NUM_LOS_TARGET

    STATUS = XP_TARGET_TRAVEL_TIME(SAT_ID, ATTITUDE_FRAME_ID,
&        INSTRUMENT_ID, TIME_REF,
&        TIME, POS, VEL, ACC, DERIV, INTER_FLAG,
&        LOS_AZ, LOS_EL, TRAVEL_TIME,
&        LOS_AZ_RATE, LOS_EL_RATE,
&        TRAVEL_TIME_RATE, IRAY, FREQ,
&        NUM_USER_TARGET, NUM_LOS_TARGET, IERR)

```

### 7.69.3 Input Parameters

The `xp_target_travel_time` CFI function has the following input parameters:

*Table 247: Input parameters of `xp_target_travel_time` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
los_el	double *	-	Elevation of the LOS (Attitude Frame)	deg	$\geq -90$ $\leq 90$
travel_time	double *	-	Travel time along the (curved) line of sight	s	$> 0$
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-
los_el_rate	double *	-	Elevation-rate of the LOS (Attitude Frame)	deg/s	-
travel_time_rate	double *	-	Travel time-rate along the (curved) line of sight	s/s	-
iray	long *	-	Ray tracing model switch	-	Accepted values: (0) XP_NO_REF (1) XP_STD_REF (2) XP_USER_REF
freq	double *	-	Frequency of the signal	Hz	$\geq 0$

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.
- Ray tracing model switch: `iray`. See current document, table 3.

### 7.69.4 Output Parameters

The output parameters of the **xp\_target\_travel\_time** CFI function are:

*Table 248: Output parameters of xp\_target\_travel\_time*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.69.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_travel\_time** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_travel\_time** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 249: Error messages of xp\_target\_travel\_time function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_ATTITUDE_STATUS_ERR	0
ERR	tsection flag is not correct	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_INTER_FLAG_ERR	1
ERR	Invalid Frequency	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_FREQ_ERR	2
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_ATM_NOT_INIT_ERR	3
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_ATM_INIT_IRAY_COMPATIB_ERR	4

*Table 249: Error messages of xp\_target\_travel\_time function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Time reference ID is not correct	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_TIME_REF_ERR	5
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_DERIV_FLAG_ERR	6
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_IRAY_ID_ERR	7
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_INVALID_SV_ERR	8
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_LOS_AZIMUTH_ERR	9
ERR	Invalid LOS Elevation	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_LOS_ELEVATION_ERR	10
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_GEODETTIC_ALT_ERR	11
ERR	Memory allocation error	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_MEMORY_ERR	12
ERR	Internal computation error # 3	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_INITIAL_LOOK_DIR_OR_PLANE_ERR	13
ERR	Time Reference not initialised	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_TIME_REF_INIT_ERR	14
ERR	No target was found	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_TARGET_NOT_FOUND_ERR	15
ERR	Internal computation error # 4	No calculation performed	XP_CFI_TARGET_TRAVEL_TIME_RANGE_OR_POINTING_CALC_ERR	16
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_TARGET_TRAVEL_TIME_INVALID_SV_WARN	23
WARN	Path from satellite to target occulted by the Earth	Calculation performed. A message informs the user.	XP_CFI_TARGET_TRAVEL_TIME_NEGATIVE_ALTITUDE_WARN	24

### ***7.69.6 Runtime Performances***

The following runtime performances have been measured.

*Table 250: Runtime performances of xp\_target\_travel\_time*

Ultra Sparc II-400 [ms]
TBD

## 7.70 xp\_target\_tangent\_sun

### 7.70.1 Overview

The **xp\_target\_tangent\_sun** CFI function computes the location of the tangent point over the Earth that is located on the line of sight that points to the Sun.

### 7.70.2 Calling Interface

The calling interface of the **xp\_target\_tangent\_sun** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, iray;
    double freq;
    long ierr[XP_NUM_ERR_TARGET_TANGENT_SUN], status,
        num_user_target, num_los_target;

    status = xp_target_tangent_sun(&sat_id,
        &attitude_id,
        &atmos_id,
        &dem_id,
        &deriv, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_tangent_sun_run(&run_id,
        &attitude_id,
        &deriv, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}
```

The `XP_NUM_ERR_TARGET_TANGENT_SUN` constant is defined in the file *explorer\_pointing.h*.

For ForTran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
      INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID,
&      TIME_REF, DERIV, IRAY
      REAL*8 TIME, FREQ
      REAL*8 POS(3), VEL(3), ACC(3)
      INTEGER*4 IERR(XP_NUM_ERR_TARGET_TANGENT_SUN), STATUS,
&      NUM_USER_TARGET, NUM_LOS_TARGET

      STATUS = XP_TARGET_TANGENT_SUN(SAT_ID, ATTITUDE_FRAME_ID,
&      INSTRUMENT_ID,
&      TIME_REF, TIME,
&      POS, VEL, ACC, DERIV, IRAY, FREQ,
&      NUM_USER_TARGET, NUM_LOS_TARGET, IERR)
```

### 7.70.3 Input Parameters

The `xp_target_tangent_sun` CFI function has the following input parameters:

*Table 251: Input parameters of `xp_target_tangent_sun` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
iray	long *	-	Ray tracing model switch	-	Accepted values: All (see table 3)
freq	double *	-	Frequency of the signal	Hz	>= 0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.
- Ray tracing model switch: `iray`. See current document, table 3

### 7.70.4 Output Parameters

The output parameters of the `xp_target_tangent_sun` CFI function are:

*Table 252: Output parameters of `xp_target_tangent_sun`*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-



### 7.70.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_tangent\_sun** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_tangent\_sun** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 253: Error messages of xp\_target\_tangent\_sun function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude ID is not initialized	No calculation performed	XP_CFI_SUN_ATTITUDE_STATUS_ERR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_SUN_DERIV_FLAG_ERR	1
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_SUN_IRAY_ID_ERR	2
ERR	Invalid Frequency	No calculation performed	XP_CFI_SUN_FREQ_ERR	3
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_SUN_ATM_NOT_INIT_ERR	4
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_SUN_ATM_INIT_IRAY_COMPATIB_ERR	5
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_SUN_INVALID_SV_ERR	6
ERR	Time Reference not initialised	No calculation performed	XP_CFI_SUN_TIME_REF_INIT_ERR	7
ERR	Internal computation error # 1	No calculation performed	XP_CFI_SUN_SUN_POSITION_CALC_ERR	8
ERR	Internal computation error # 2	No calculation performed	XP_CFI_SUN_SUN_CS_CALC_ERR	9
ERR	Internal computation error # 3	No calculation performed	XP_CFI_SUN_SUN_POINTING_CALC_ERR	10
ERR	Internal computation error # 4	No calculation performed	XP_CFI_SUN_TARGET_STAR_ERR	11
ERR	Internal computation error # 5	No calculation performed	XP_CFI_SUN_TG_PT_BEHIND_LOOK_DIR_ERR	12
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_SUN_INVALID_SV_WARN	13

*Table 253: Error messages of xp\_target\_tangent\_sun function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
WARN	Tangent point is behind looking direction	Calculation performed. A message informs the user.	XP_CFI_SUN_TG_PT_BEHIND_LOOK_DIR_WARN	14

### **7.70.6 Runtime Performances**

The following runtime performances have been measured.

*Table 254: Runtime performances of xp\_target\_tangent\_sun*

<b>Ultra Sparc II-400 [ms]</b>
0.925

## 7.71 xp\_target\_tangent\_moon

### 7.71.1 Overview

The **xp\_target\_tangent\_moon** CFI function computes the location of the tangent point over the Earth that is located on the line of sight that points to the Moon.

### 7.71.2 Calling Interface

The calling interface of the **xp\_target\_tangent\_moon** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, iray;
    double freq;
    long ierr[XP_NUM_ERR_TARGET_TANGENT_MOON], status,
        num_user_target, num_los_target;

    status = xp_target_tangent_moon(&sat_id,
        &attitude_id,
        &atmos_id,
        &dem_id,
        &deriv, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_target_tangent_moon_run(&run_id,
        &attitude_id,
        &deriv, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}
}
```

The `XP_NUM_ERR_TARGET_TANGENT_MOON` constant is defined in the file `explorer_pointing.h`.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID, TIME_REF,
&
    DERIV, IRAY
    REAL*8 TIME, FREQ
    REAL*8 POS(3), VEL(3), ACC(3)
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_TANGENT_MOON), STATUS,
&
    NUM_USER_TARGET, NUM_LOS_TARGET

    STATUS = XP_TARGET_TANGENT_MOON(SAT_ID, INSTRUMENT_ID, TIME_REF,
&
    TIME, POS, VEL, ACC, DERIV, IRAY, FREQ,
&
    NUM_USER_TARGET, NUM_LOS_TARGET, IERR)
```

### 7.71.3 Input Parameters

The `xp_target_tangent_moon` CFI function has the following input parameters:

Table 255: Input parameters of `xp_tangent_target_moon` function

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
iray	long *	-	Ray tracing model switch	-	Accepted values: All (see table 3)
freq	double *	-	Frequency of the signal	Hz	>= 0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.
- Ray tracing model switch: `iray`. See current document, table 3

### 7.71.4 Output Parameters

The output parameters of the **xp\_target\_tangent\_moon** CFI function are:

*Table 256: Output parameters of xp\_tangent\_target\_moon*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 (Set to 1 for non multi-target routines)
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.71.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_tangent\_moon** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_tangent\_moon** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 257: Error messages of xp\_target\_tangent\_moon function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude ID is not initialized	No calculation performed	XP_CFI_MOON_ATTITUDE_STATUS_ERR	0
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_MOON_DERIV_FLAG_ERR	1
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_MOON_IRAY_ID_ERR	2
ERR	Invalid Frequency	No calculation performed	XP_CFI_MOON_FREQ_ERR	3
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_MOON_ATM_NOT_INIT_ERR	4
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_MOON_ATM_INIT_IRAY_COMPATIB_ERR	5

*Table 257: Error messages of xp\_target\_tangent\_moon function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_MOON_INVALID_SV_ERR	6
ERR	Time Reference not initialised	No calculation performed	XP_CFI_MOON_TIME_REF_INIT_ERR	7
ERR	Internal computation error #1	No calculation performed	XP_CFI_MOON_MOON_POSITION_CALC_ERR	8
ERR	Internal computation error #2	No calculation performed	XP_CFI_MOON_MOON_CS_CALC_ERR	9
ERR	Internal computation error #3	No calculation performed	XP_CFI_MOON_MOON_POINTING_CALC_ERR	10
ERR	Internal computation error #4	No calculation performed	XP_CFI_MOON_TARGET_STAR_ERR	11
ERR	Internal computation error #5	No calculation performed	XP_CFI_MOON_TG_PT_BEHIND_LOOK_DIR_ERR	12
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_MOON_INVALID_SV_WARN	19
WARN	Tangent point is behind looking direction	Calculation performed. A message informs the user.	XP_CFI_MOON_TG_PT_BEHIND_LOOK_DIR_WARN	20

### **7.71.6 Runtime Performances**

The following runtime performances have been measured.

*Table 258: Runtime performances of xp\_target\_tangent\_moon*

<b>Ultra Sparc II-400 [ms]</b>
0.925

## 7.72 xp\_multi\_target\_inter

### 7.72.1 Overview

The **xp\_multi\_target\_inter** CFI function computes the first or the second intersection points of the line of sight from the satellite (defined by an elevation and an azimuth angle expressed in the selected Attitude Frame) with surfaces located at certain geodetic altitudes over the Earth.

### 7.72.2 Calling Interface

The calling interface of the **xp\_multi\_target\_inter** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, inter_flag, iray;
    double los_az, los_el, geod_alt[XP_MAX_NUM_MULTI_TARGET],
           los_az_rate, los_el_rate, freq;
    long ierr[XP_NUM_ERR_MULTI_TARGET_INTER], num_target, status
          num_user_target, num_los_target;

    status = xp_multi_target_inter(&sat_id,
                                   &attitude_id,
                                   &atmos_id,
                                   &dem_id,
                                   &deriv, &inter_flag, &los_az,
                                   &los_el, &num_target, &geod_alt, &los_az_rate,
                                   &los_el_rate, &iray, &freq,
                                   &num_user_target, &num_los_target,
                                   &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_multi_target_inter_run(&run_id,
                                       &attitude_id,
                                       &deriv, &inter_flag, &los_az,
```

```

        &los_el, &num_target, geod_alt, &los_az_rate,
        &los_el_rate, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);
}

```

The XP\_NUM\_ERR\_MULTI\_TARGET\_INTER constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```

#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID, TIME_REF
    INTEGER*4 DERIV, INTER_FLAG, IRAY
    REAL*8 TIME
    REAL*8 POS(3), VEL(3), ACC(3)
    REAL*8 LOS_AZ, LOS_EL, GEOD_ALT, LOS_AZ_RATE, LOS_EL_RATE, FREQ
    INTEGER*4 IERR(XP_NUM_ERR_MULTI_TARGET_INTER), STATUS
    INTEGER*4 NUM_TARGET, NUM_USER_TARGET, NUM_LOS_TARGET

    STATUS = XP_MULTI_TARGET_INTER(SAT_ID, ATTITUDE_FRAME_ID,
&                                     INSTRUMENT_ID, TIME_REF,
&                                     TIME, POS, VEL, ACC, DERIV, INTER_FLAG,
&                                     LOS_AZ, LOS_EL, NUM_TARGET, GEOD_ALT,
&                                     LOS_AZ_RATE, LOS_EL_RATE, IRAY, FREQ,
&                                     NUM_USER_TARGET, NUM_LOS_TARGET, IERR)

```



### 7.72.3 Input Parameters

The `xp_multi_target_inter` CFI function has the following input parameters:

*Table 259: Input parameters of `xp_multi_target_inter` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
inter_flag	long *	-	Flag for first or second intersection point selection	-	Allowed values: (1) XP_INTER_1ST (2) XP_INTER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
los_el	double *	-	Elevation of the LOS (Attitude Frame)	deg	$\geq -90$ $\leq 90$
num_target	long *	-	Number of user defined altitudes	-	$> 0$
geod_alt	double [XP_MAX_NUM_MULTITARGET]	-	Geodetic altitude over the Earth, sorted vector, strict monotonic decreasing	m	$\geq -b_{WGS}$
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-
los_el_rate	double *	-	Elevation-rate of the LOS (Attitude Frame)	deg/s	-
iray	long *	-	Ray tracing model switch	-	Accepted values: (0) XP_NO_REF (1) XP_STD_REF (2) XP_USER_REF
freq	double *	-	Frequency of the signal	Hz	$\geq 0$

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: `deriv`. See current document, table 3.
- Intersection flag: `inter_flag`. See current document, table 3.
- Ray tracing model switch: `iray`. See current document, table 3.

## 7.72.4 Output Parameters

The output parameters of the **xp\_multi\_target\_inter** CFI function are:

*Table 260: Output parameters of xp\_multi\_target\_inter*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*		Number of user defined targets calculated		>= 0 <= num_target
num_los_target	long*		Number of LOS targets calculated		>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

## 7.72.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_multi\_target\_inter** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_multi\_target\_inter** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 261: Error messages of xp\_multi\_target\_inter function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_MULTI_TARGET_INTER_ATTITUDE_STATU S_ERR	0
ERR	Intersection flag is not correct	No calculation performed	XP_CFI_MULTI_TARGET_INTER_INTER_FLAG_ERR	1
ERR	Invalid Frequency	No calculation performed	XP_CFI_MULTI_TARGET_INTER_FREQ_ERR	2
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_MULTI_TARGET_INTER_ATM_NOT_INIT_E RR	3
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_MULTI_TARGET_INTER_ATM_INIT_IRAY_ COMPATIB_ERR	4
ERR	Time reference ID is not correct	No calculation performed	XP_CFI_MULTI_TARGET_INTER_TIME_REF_ERR	5

*Table 261: Error messages of xp\_multi\_target\_inter function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_MULTI_TARGET_INTER_DERIV_FLAG_ERR	6
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_MULTI_TARGET_INTER_IRAY_ID_ERR	7
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_MULTI_TARGET_INTER_INVALID_SV_ERR	8
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_MULTI_TARGET_INTER_LOS_AZIMUTH_ERR	9
ERR	Invalid LOS Elevation	No calculation performed	XP_CFI_MULTI_TARGET_INTER_LOS_ELEVATION_ERR	10
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_MULTI_TARGET_INTER_GEODETTIC_ALT_ERR	11
ERR	Memory allocation error	No calculation performed	XP_CFI_MULTI_TARGET_INTER_MEMORY_ERR	12
ERR	Internal computation error #3	No calculation performed	XP_CFI_MULTI_TARGET_INTER_INITIAL_LOOK_DIRECTION_OR_PLANE_ERR	13
ERR	Time Reference not initialised	No calculation performed	XP_CFI_MULTI_TARGET_INTER_TIME_REF_INIT_ERR	14
ERR	No target was found	No calculation performed	XP_CFI_MULTI_TARGET_INTER_TARGET_NOT_FOUND_ERR	15
ERR	Internal computation error #4	No calculation performed	XP_CFI_MULTI_TARGET_INTER_RANGE_OR_POINTING_CALC_ERR	16
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_MULTI_TARGET_INTER_INVALID_SV_WARN	23
WARN	Path from satellite to target occulted by the Earth	Calculation performed. A message informs the user.	XP_CFI_MULTI_TARGET_INTER_NEGATIVE_ALTITUDE_WARN	24

### **7.72.6 Runtime Performances**

The following runtime performances have been measured.

*Table 262: Runtime performances of xp\_multi\_target\_inter*

Ultra Sparc II-400 [ms]
TBD

## 7.73 xp\_multi\_target\_travel\_time

### 7.73.1 Overview

The **xp\_multi\_target\_travel\_time** CFI function computes the points of the line of sight from the satellite (defined by an elevation and an azimuth angle expressed in the selected Attitude Frame) at given travel times along the (curved) line of sight.

### 7.73.2 Calling Interface

The calling interface of the **xp\_multi\_target\_travel\_time** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long          sat_id;
    xp_attitude_id attitude_id = {NULL};
    xp_atmos_id   atmos_id = {NULL};
    xp_dem_id     dem_id = {NULL};
    xp_target_id  target_id = {NULL};
    long deriv, iray;
    double los_az, los_el, travel_time[XP_MAX_NUM_MULTI_TARGET];
    double los_az_rate, los_el_rate, travel_time_rate, freq;
    long num_target, num_user_target, num_los_target;
    long ierr[XP_NUM_ERR_MULTI_TARGET_TRAVEL_TIME], status;

    status = xp_multi_target_travel_time(&sat_id,
        &attitude_id,
        &atmos_id,
        &dem_id,
        &deriv, &los_az, &los_el,
        &num_target, &travel_time, &los_az_rate,
        &los_el_rate, &travel_time_rate, &iray, &freq,
        &num_user_target, &num_los_target,
        &target_id, ierr);

    /* Or, using the run_id */
    long run_id;

    status = xp_multi_target_travel_time_run(&run_id,
        &attitude_id,
        &deriv, &los_az, &los_el,
```

```

    &num_target, travel_time, los_az_rate,
    &los_el_rate, &travel_time_rate, iray, freq,
    &num_user_target, &num_los_target,
    &target_id, ierr);
}

```

The `XP_NUM_ERR_MULTI_TARGET_TRAVEL_TIME` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```

#include <explorer_pointing.inc>
  INTEGER*4 SAT_ID, ATTITUDE_FRAME_ID, INSTRUMENT_ID, TIME_REF
  INTEGER*4 DERIV, IRAY
  REAL*8 TIME
  REAL*8 POS(3), VEL(3), ACC(3)
  REAL*8 LOS_AZ, LOS_EL, TRAVEL_TIME(XP_MAX_NUM_MULTI_TARGET)
  REAL*8 LOS_AZ_RATE, LOS_EL_RATE, TRAVEL_TIME_RATE, FREQ
  INTEGER*4 NUM_TARGET, NUM_USER_TARGET, NUM_LOS_TARGET
  INTEGER*4 IERR(XP_NUM_ERR_MULTI_TARGET_TRAVEL_TIME), STATUS

  STATUS = XP_MULTI_TARGET_TRAVEL_TIME(SAT_ID, ATTITUDE_FRAME_ID,
&                                     INSTRUMENT_ID, TIME_REF,
&                                     TIME, POS, VEL, ACC, DERIV, INTER_FLAG,
&                                     LOS_AZ, LOS_EL, NUM_TARGET, TRAVEL_TIME,
&                                     LOS_AZ_RATE, LOS_EL_RATE,
&                                     TRAVEL_TIME_RATE, IRAY, FREQ,
&                                     NUM_USER_TARGET, NUM_LOS_TARGET, IERR)

```

### 7.73.3 Input Parameters

The `xp_multi_target_travel_time` CFI function has the following input parameters:

*Table 263: Input parameters of `xp_multi_target_travel_time` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sat_id	long *	-	Satellite ID	-	Complete
attitude_id	xp_attitude_id*	-	Structure that contains the Attitude. (input/output)	-	-
atmos_id	xp_atmos_id*	-	Structure that contains the atmosphere initialisation.	-	-
dem_id	xp_dem_id*	-	Structure that contains the DEM initialisation.	-	-
deriv	long *	-	Derivative ID	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
los_az	double *	-	Azimuth of the LOS (Attitude Frame)	deg	$\geq 0$ $< 360$
los_el	double *	-	Elevation of the LOS (Attitude Frame)	deg	$\geq -90$ $\leq 90$
num_target	long *	-	Number of user defined times	-	$> 0$
travel_time	double [XP_MAX_NUM_MULTI_TARGET]	-	Travel time along the (curved) line of sight,sorted vector, strict monotonic increasing	s	$> 0$
los_az_rate	double *	-	Azimuth-rate of the LOS (Attitude Frame)	deg/s	-
los_el_rate	double *	-	Elevation-rate of the LOS (Attitude Frame)	deg/s	-
travel_time_rate	double *	-	Travel time-rate along the (curved) line of sight. Constant number.	s/s	-
iray	long *	-	Ray tracing model switch	-	Accepted values: (0) XP_NO_REF (1) XP_STD_REF (2) XP_USER_REF
freq	double *	-	Frequency of the signal	Hz	$\geq 0$

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Derivative switch: deriv. See current document, table 3.
- Ray tracing model switch: iray. See current document, table 3.

### 7.73.4 Output Parameters

The output parameters of the **xp\_multi\_target\_travel\_time** CFI function are:

*Table 264: Output parameters of xp\_multi\_target\_travel\_time*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
num_user_target	long*	-	Number of user defined targets calculated	-	>= 0 <= num_target
num_los_target	long*	-	Number of LOS targets calculated	-	>= 0
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
ierr	long	-	Error vector	-	-

### 7.73.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_multi\_target\_travel\_time** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_multi\_target\_travel\_time** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 265: Error messages of xp\_multi\_target\_travel\_time function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Attitude Id. is not initialized	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_ATTITUDE_STATUS_ERR	0
ERR	Intersection flag is not correct	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_INTER_FLAG_ERR	1
ERR	Invalid Frequency	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_FREQ_ERR	2
ERR	Atmospheric model has not been initialised	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_ATM_NOT_INIT_ERR	3
ERR	Atmosphere initialisation is not compatible with Ray Tracing Model	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_ATM_INIT_IRAY_COMPATIB_ERR	4



*Table 265: Error messages of xp\_multi\_target\_travel\_time function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Time reference ID is not correct	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_TIME_REF_ERR	5
ERR	Deriv flag is not correct	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_DERIV_FLAG_ERR	6
ERR	Ray Tracing Model ID is not correct	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_IRAY_ID_ERR	7
ERR	Input state vector does not satisfy loose tolerance requirement	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_INVALID_SV_ERR	8
ERR	Invalid LOS Azimuth	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_LOS_AZIMUTH_ERR	9
ERR	Invalid LOS Elevation	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_LOS_ELEVATION_ERR	10
ERR	Invalid Geodetic Altitude	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_GEODETI C_ALT_ERR	11
ERR	Memory allocation error	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_MEMORY_ERR	12
ERR	Internal computation error #3	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_INITIAL_LOOK_DIR_OR_PLANE_ERR	13
ERR	Time Reference not initialised	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_TIME_REF_INIT_ERR	14
ERR	No target was found	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_TARGET_NOT_FOUND_ERR	15
ERR	Internal computation error #4	No calculation performed	XP_CFI_MULTI_TARGET_TRAVEL_TIME_RANGE_OR_POINTING_CALC_ERR	16
WARN	Input state vector does not satisfy tight tolerance requirement	Calculation performed. A message informs the user.	XP_CFI_MULTI_TARGET_TRAVEL_TIME_INVALID_SV_WARN	23
WARN	Path from satellite to target occulted by the Earth	Calculation performed. A message informs the user.	XP_CFI_MULTI_TARGET_TRAVEL_TIME_NEGATIVE_ALTITUDE_WARN	24

---

### 7.73.6 Runtime Performances

The following runtime performances have been measured.

*Table 266: Runtime performances of xp\_multi\_target\_travel\_time*

Ultra Sparc II-400 [ms]
TBD

## 7.74 xp\_target\_extra\_vector

### 7.74.1 Overview

The **xp\_target\_extra\_vector** CFI function provides the following output parameters for the target(s) in input data structure.: target position, velocity and acceleration vectors, line of sight direction, range, travel time and their corresponding derivatives.

### 7.74.2 Calling Interface

The calling interface of the **xp\_target\_extra\_vector** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long choice, target_type, target_number;
    xp_target_id  target_id = {NULL};
    double vector_results[XP_SIZE_TARGET_RESULT_VECTOR],
           vector_results_rate[XP_SIZE_TARGET_RESULT_VECTOR],
           vector_results_rate_rate[XP_SIZE_TARGET_RESULT_VECTOR];
    long ierr[XP_NUM_ERR_TARGET_EXTRA_VECTOR], status;

    status = xp_target_extra_vector (&target_id, &choice,
                                     &target_type, &target_number,
                                     vector_results,
                                     vector_results_rate,
                                     vector_results_rate_rate, ierr);
}
```

The `XP_SIZE_TARGET_RESULT_VECTOR` and `XP_NUM_ERR_TARGET_EXTRA_VECTOR` constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, CHOICE, TARGET_ID
    REAL*8 VECTOR_RESULTS(XP_SIZE_TARGET_RESULT_VECTOR),
    &       VECTOR_RESULTS_RATE(XP_SIZE_TARGET_RESULT_VECTOR),
    &       VECTOR_RESULTS_RATE_RATE(XP_SIZE_TARGET_RESULT_VECTOR)
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_EXTRA_VECTOR), STATUS

    STATUS = XP_TARGET_EXTRA_VECTOR (&SAT_ID, &CHOICE, &TARGET_ID,
```

& TARGET\_ID ,  
 & VECTOR\_RESULTS , VECTOR\_RESULTS\_RATE ,  
 & VECTOR\_RESULTS\_RATE\_RATE , IERR )

### 7.74.3 Input Parameters

The `xp_target_extra_vector` CFI function has the following input parameters:

*Table 267: Input parameters of xp\_target\_extra\_vector function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
choice	long *	-	Flag to select the extra results to be computed. Even though derivatives could be requested by user, they will not be calculated if the target was computed without derivatives (a warning is raised in this case).	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
target_type	long *		Flag to select the type of target		XP_USER_TARGET_T TYPE XP_LOS_TARGET_TY PE XP_DEM_TARGET_TY PE
target_number	long *	-	Target number		>= 0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Choice. (See table 3).

### 7.74.4 Output Parameters

The output parameters of the **xp\_target\_extra\_vector** CFI function are:

Table 268: Output parameters of *xp\_target\_extra\_vector*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
vector_results_double[XP_SIZE_TARGET_RESULT_VECTOR]		[0]	Target Position X (Earth-Fixed)	m	
		[1]	Target Position Y (Earth-Fixed)	m	
		[2]	Target Position Z (Earth-Fixed)	m	
		[3]	Direction LOS X (Earth-Fixed)	-	
		[4]	Direction LOS Y (Earth-Fixed)	-	
		[5]	Direction LOS Z (Earth-Fixed)	-	
		[6]	Range to Attitude Frame Origin	m	
		[7]	Travel Time to Attitude Frame Origin	s	
		[8:XP_SIZE_TARGET_RESULT_VECTOR]	(dummy)	-	-
vector_results_rate_double[XP_SIZE_TARGET_RESULT_VECTOR]		[0]	Target Velocity X (Earth-Fixed)	m/ s	
		[1]	Target Velocity Y (Earth-Fixed)	m/ s	
		[2]	Target Velocity Z (Earth-Fixed)	m/ s	
		[3]	Direction Rate LOS X (Earth-Fixed)	1/s	
		[4]	Direction Rate LOS Y (Earth-Fixed)	1/s	
		[5]	Direction Rate LOS Z (Earth-Fixed)	1/s	
		[6]	Range Rate to Attitude Frame Origin	m/s	
		[7]	Travel Time Rate to Attitude Frame Origin	s/s	
		[8:XP_SIZE_TARGET_RESULT_VECTOR]	(dummy)	-	-

Table 268: Output parameters of *xp\_target\_extra\_vector*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
vector_results_rate_rate  double[XP_SIZE_TARGET_RESULT_VECTOR]		[0]	Target Acceleration X (Earth-Fixed)	m/s <sup>2</sup>	
		[1]	Target Acceleration Y (Earth-Fixed)	m/s <sup>2</sup>	
		[2]	Target Acceleration Z (Earth-Fixed)	m/s <sup>2</sup>	
		[3]	Direction Rate Rate LOS X (Earth-Fixed)	1/s <sup>2</sup>	
		[4]	Direction Rate Rate LOS Y (Earth-Fixed)	1/s <sup>2</sup>	
		[5]	Direction Rate Rate LOS Z (Earth-Fixed)	1/s <sup>2</sup>	
		[6]	Range Rate Rate to Attitude Frame Origin	m/s <sup>2</sup>	
		[7]	Travel Time Rate Rate to Attitude Frame Origin	s/s <sup>2</sup>	
		[8:XP_SIZE_TARGET_RESULT_VECTOR]	(dummy)	-	-
ierr	long	-	Error vector	-	-

Note that first derivative parameters (vector\_results\_rate) are returned as zeros if derivative flag (deriv) was set to NO\_DER when the target was computed and that second derivative parameters (vector\_results\_rate\_rate) are returned as zeros if derivative flag (deriv) was set to NO\_DER or 1ST\_DER. Note also that when a refraction mode is selected, the second derivative parameters (vector\_results\_rate\_rate) are returned as zeros.

### 7.74.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_extra\_vector** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_extra\_vector** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

Table 269: Error messages of *xp\_target\_extra\_vector* function

Error type	Error message	Cause and impact	Error code	Error No
ERR	The Target ID does not contain any data	No calculation performed	XP_CFI_TARGET_EXTRA_VECTOR_NO_DATA_ERR	0

*Table 269: Error messages of xp\_target\_extra\_vector function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_VECTOR_NO_SUCH_USER_TARGET_ERR	1
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_VECTOR_NO_SUCH_LOS_TARGET_ERR	2
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_VECTOR_NO_SUCH_EARTH_TARGET_ERR	3
ERR	Could not compute the DEM target	No calculation performed	XP_CFI_TARGET_EXTRA_VECTOR_EARTH_TARGET_COMPUT_ERR	4
ERR	Wrong target type	No calculation performed	XP_CFI_TARGET_EXTRA_VECTOR_WRONG_TARGET_TYPE_ERR	5
ERR	Wrong deriv input flag	No calculation performed	XP_CFI_TARGET_EXTRA_VECTOR_DERIV_FLAG_ERR	6
WARN	1st. Derivatives are not available	Calculation performed. A message informs the user.	XP_CFI_TARGET_EXTRA_VECTOR_DER_1ST_NOT_AVAILABLE_WARN	7
WARN	2nd. Derivatives are not available	Calculation performed. A message informs the user.	XP_CFI_TARGET_EXTRA_VECTOR_DER_2ND_NOT_AVAILABLE_WARN	8

### **7.74.6 Runtime Performances**

The following runtime performances have been measured.

*Table 270: Runtime performances of xp\_target\_extra\_vector*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.75 xp\_target\_extra\_main

### 7.75.1 Overview

The **xp\_target\_extra\_main** CFI function computes the extra parameter for the target(s) in input data structure.

### 7.75.2 Calling Interface

The calling interface of the **xp\_target\_extra\_main** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long choice, target_type, target_number;
    double main_results[XP_SIZE_TARGET_RESULT_MAIN],
           main_results_rate[XP_SIZE_TARGET_RESULT_MAIN],
           main_results_rate_rate[XP_SIZE_TARGET_RESULT_MAIN];
    xp_target_id target_id = {NULL};
    long ierr[XP_NUM_ERR_TARGET_EXTRA_MAIN], status;

    status = xp_target_extra_main (&target_id, &choice, &target_type,
                                   &target_number,
                                   main_results, main_results_rate,
                                   main_results_rate_rate, ierr);
}
```

The `XP_SIZE_TARGET_EXTRA_MAIN` and `XP_NUM_ERR_TARGET_RESULT_MAIN` constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, CHOICE, TARGET_ID, TARGET_TYPE
    REAL*8 MAIN_RESULTS(XP_SIZE_TARGET_RESULT_MAIN),
    &        MAIN_RESULTS_RATE(XP_SIZE_TARGET_RESULT_MAIN),
    &        MAIN_RESULTS_RATE_RATE(XP_SIZE_TARGET_RESULT_MAIN)
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_EXTRA_MAIN), STATUS

    STATUS = XP_TARGET_EXTRA_MAIN (SAT_ID, CHOICE, TARGET_TYPE,
    &                                TARGET_ID,
    &                                MAIN_RESULTS, MAIN_RESULTS_RATE,
    &                                MAIN_RESULTS_RATE_RATE, IERR)
```



### 7.75.3 Input Parameters

The `xp_target_extra_main` CFI function has the following input parameters:

*Table 271: Input parameters of `xp_target_extra_main` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
choice	long *	-	Flag to select the extra results to be computed. Even though derivatives could be requested by user, they will not be calculated if the target was computed without derivatives (a warning is raised in this case).	-	Complete
target_type	long *	-	Flag to select the type of target	-	XP_USER_TARGET_TYPE XP_LOS_TARGET_TYPE XP_DEM_TARGET_TYPE
target_number	long *	-	Target number	-	>= 0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Choice. (See table 3).

### 7.75.4 Output Parameters

The output parameters of the `xp_target_extra_main` CFI function are:

Table 272: Output parameters of `xp_target_extra_main`

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
main_results double[XP_SIZE_TARGET_RESULT_MAIN]		[0]	Target geocentric longitude (Earth Fixed CS)	deg	$\geq 0$ $< 360$
		[1]	Target geocentric latitude (Earth Fixed CS)	deg	$\geq -90$ $\leq +90$
		[2]	Target geodetic latitude (Earth Fixed CS)	deg	$\geq -90$ $\leq +90$
		[3]	Target geodetic altitude (Earth Fixed CS)	m	-
		[4]	Satellite to target azimuth (Topocentric CS)	deg	$\geq 0$ $< 360$
		[5]	Satellite to target elevation (Topocentric CS)	deg	$\geq -90$ $\leq +90$
		[6]	Satellite to target pointing: Azimuth (attitude frame)	deg	$\geq 0$ $< 360$
		[7]	Satellite to target pointing: Elevation (attitude frame)	deg	$\geq -90$ $\leq +90$
		[8]	Target to satellite pointing: Azimuth (Topocentric)	deg	$\geq 0$ $< 360$
		[9]	Target to satellite pointing: Elevation (Topocentric)	deg	$\geq -90$ $\leq +90$
[10:XP_SIZE_TARGET_RESULT_MAIN]		(dummy)	-	-	

Table 272: Output parameters of *xp\_target\_extra\_main*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
main_results_rate double[XP_SIZE_TARGET_RESULT_MAIN]		[0]	Target geocentric longitude rate (Earth Fixed CS)	deg/s	-
		[1]	Target geocentric latitude rate (Earth Fixed CS)	deg/s	-
		[2]	Target geodetic latitude rate (Earth Fixed CS)	deg/s	-
		[3]	Target geodetic altitude rate (Earth Fixed CS)	m/s	-
		[4]	Satellite to target azimuth rate (Topocentric CS)	deg/s	-
		[5]	Satellite to target elevation rate (Topocentric CS)	deg/s	-
		[6]	Satellite to target pointing: Azimuth rate (attitude frame)	deg/s	-
		[7]	Satellite to target pointing: Elevation rate (attitude frame)	deg/s	-
		[8]	Target to satellite pointing: Azimuth rate (Topocentric)	deg/s	-
		[9]	Target to satellite pointing: Elevation rate (Topocentric)	deg/s	-
		[10:XP_SIZE_TARGET_RESULT_MAIN]	(dummy)	-	-

Table 272: Output parameters of *xp\_target\_extra\_main*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
main_results_rate_rate double[XP_SIZE_TARGET_RESULT_MAIN]		[0]	Target geocentric longitude rate-rate (Earth Fixed CS)	deg/s <sup>2</sup>	-
		[1]	Target geocentric latitude rate-rate (Earth Fixed CS)	deg/s <sup>2</sup>	-
		[2]	Target geodetic latitude rate-rate (Earth Fixed CS)	deg/s <sup>2</sup>	-
		[3]	Target geodetic altitude rate-rate (Earth Fixed CS)	m/s <sup>2</sup>	-
		[4]	Satellite to target azimuth rate-rate (Topocentric CS)	deg/s <sup>2</sup>	-
		[5]	Satellite to target elevation rate-rate (Topocentric CS)	deg/s <sup>2</sup>	-
		[6]	Satellite to target pointing: Azimuth rate-rate (attitude frame)	deg/s <sup>2</sup>	-
		[7]	Satellite to target pointing: Elevation rate-rate (attitude frame)	deg/s <sup>2</sup>	-
		[8]	Target to satellite pointing: Azimuth rate-rate (Topocentric)	deg/s <sup>2</sup>	-
		[9]	Target to satellite pointing: Elevation rate-rate (Topocentric)	deg/s <sup>2</sup>	-
		[10:XP_SIZE_TARGET_RESULT_MAIN]	(dummy)	-	-
ierr	long	-	Error vector	-	-

Note that first derivative parameters (*vector\_results\_rate*) are returned as zeros if derivative flag (*deriv*) was set to *NO\_DER* when the target was computed and that second derivative parameters (*vector\_results\_rate\_rate*) are returned as zeros if derivative flag (*deriv*) was set to *NO\_DER* or *1ST\_DER*.

Note also that when a refraction mode is selected, the second derivative parameters (*vector\_results\_rate\_rate*) are returned as zeros.

### 7.75.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the *xp\_target\_extra\_main* CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the *EXPLORER\_POINTING* software library *xp\_get\_msg* (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (*WARN*) or an error (*ERR*), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the *xp\_target\_extra\_main* function by calling the function of the *EXPLORER\_POINTING* software library *xp\_get\_code* (see [GEN\_SUM])

*Table 273: Error messages of xp\_target\_extra\_main function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	No target data available	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_NO_DATA_ERR	0
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_NO_SUCH_USER_TARG ET_ERR	1
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_NO_SUCH_LOS_TARGE T_ERR	2
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_NO_SUCH_EARTH_TA RGET_ERR	3
ERR	Could not compute the DEM target	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_EARTH_TARGET_COM PUT_ERR	4
ERR	Wrong target type	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_WRONG_TARGET_TYP E_ERR	5
ERR	Invalid time reference in target data	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_INVALID_TIME_REF_E RR	6
ERR	Error calling to XL_Car_Geo CFI function	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_CAR_TO_GEO_ERR	7
ERR	Error getting transformation matrix to Topocentric CS	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_TOPO_ERR	8
ERR	Error getting direction angles	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_DIR_POINTING_ERR	9
ERR	Error while changing coordinate system	No calculation performed	XP_CFI_TARGET_EXTRA_M AIN_CS_CHANGE_ERR	10
WARN	Warning: Derivatives cannot be calculated	Calculation performed	XP_CFI_TARGET_EXTRA_M AIN_DERIV_WARN	11
WARN	Warning calling to XL_Car_Geo CFI function	Calculation performed, but derivatives will not be computed	XP_CFI_TARGET_EXTRA_M AIN_AMBIGUOUS_SINGUL AR_WARN	12

### **7.75.6 Runtime Performances**

The following runtime performances have been measured.

*Table 274: Runtime performances of xp\_target\_extra\_main*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.76 xp\_target\_extra\_aux

### 7.76.1 Overview

The **xp\_target\_extra\_aux** CFI function computes auxiliary parameters for the target in input data structure.

### 7.76.2 Calling Interface

The calling interface of the **xp\_target\_extra\_aux** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long choice, target_type, target_number;
    double aux_results[XP_SIZE_TARGET_RESULT_AUX],
           aux_results_rate[XP_SIZE_TARGET_RESULT_AUX],
           aux_results_rate_rate[XP_SIZE_TARGET_RESULT_AUX];
    xp_target_id target_id = {NULL};
    long ierr[XP_NUM_ERR_TARGET_EXTRA_AUX], status;

    status = xp_target_extra_aux(&target_id, &choice, &target_type,
                                &target_number,
                                aux_results, aux_results_rate,
                                aux_results_rate_rate, ierr);
}
```

The `XP_SIZE_TARGET_RESULT_AUX` and `XP_NUM_ERR_TARGET_EXTRA_AUX` constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, CHOICE, TARGET_TYPE, TARGET_ID
    REAL*8 AUX_RESULTS(XP_SIZE_TARGET_RESULT_AUX),
    &       AUX_RESULTS_RATE(XP_SIZE_TARGET_RESULT_AUX),
    &       AUX_RESULTS_RATE_RATE(XP_SIZE_TARGET_RESULT_AUX)
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_RESULT_AUX), STATUS

    STATUS = XP_TARGET_RESULT_AUX(SAT_ID, CHOICE, TARGET_TYPE,
    &                               TARGET_ID,
    &                               AUX_RESULTS, AUX_RESULTS_RATE,
    &                               AUX_RESULTS_RATE_RATE, IERR)
```

### 7.76.3 Input Parameters

The `xp_target_extra_aux` CFI function has the following input parameters:

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
choice	long *	-	Flag to select the extra results to be computed. Even though derivatives could be requested by user, they will not be calculated if the target was computed without derivatives (a warning is raised in this case).	-	Complete
target_type	long *		Flag to select the type of target		XP_USER_TARGET_TYPE XP_LOS_TARGET_TYPE XP_DEM_TARGET_TYPE
target_number	long *	-	Target number		>= 0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Choice. (See table 3).



## 7.76.4 Output Parameters

The output parameters of the `xp_target_extra_aux` CFI function are:

Table 275: Output parameters of `xp_target_extra_aux`

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
aux_results  double[XP_SIZE_TARGET_RESULT_AUX]		[0]	Radius of curvature in the look direction at the nadir of the target (Earth fixed CS)	m	$\geq 0$
		[1]	Distance from the nadir of the target to the satellite nadir. (Earth fixed CS)	m	$\geq 0$
		[2]	Minimum distance from the nadir of the target to the ground track (Earth Fixed CS). It is regarded as positive distance when the nadir of the target is located on the left hand side of the ground track.	m	-
		[3]	Distance from the SSP to the point located on the ground track that is at a minimum distance from the nadir of the target (Earth fixed CS) It is regarded as positive distance when that point is located on the ground track ahead the SSP (in the direction of the motion of the SSP)	m	-
		[4]	Mean Local Solar Time at target.	decimal hour	$\geq 0$ < 24
		[5]	True Local Solar Time at target.	decimal hour	$\geq 0$ < 24
		[6]	Right ascension at which the look direction from the satellite to the target points at target point. (True of Date CS)	deg	$\geq 0$ < 360
		[7]	Declination at which the look direction from the satellite to the target points at target point. (True of Date CS)	deg	$\geq -90$ < 90
		[8:XP_SIZE_TARGET_RESULT_AUX]	(dummy)	-	-

Table 275: Output parameters of *xp\_target\_extra\_aux*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
aux_results_rate	double[XP_SIZE_TARGET_RESULT_AUX]	[0]	Radius of curvature-rate in the look direction at the nadir of the target (Earth fixed CS)	m/s	-
		[1]	Distance-rate from the nadir of the target to the satellite nadir. (Earth fixed CS)	m	>= 0
		[2]	Distance-rate from the nadir of the target to the ground track (Earth fixed CS)	m/s	-
		[3]	Distance-rate from the SSP to the point located on the ground track that is at a minimum distance from the nadir of the target (Earth fixed CS)		
		[4:7]	(dummy)	-	-
		[8]	Northward component of the velocity relative to the Earth of the nadir of the target (Topocentric CS)	m/s	-
		[9]	Eastward component of the velocity relative to the Earth of the nadir of the target (Topocentric CS)	m/s	-
		[10]	Azimuth of the velocity relative to the Earth of the nadir of the target. (Topocentric CS)	deg	>= 0 < 360
		[11]	Magnitude of the velocity relative to the Earth of the nadir of the target. (Topocentric CS)	m/s	>= 0
		[12:XP_SIZE_TARGET_RESULT_AUX]	(dummy)	-	-
aux_results_rate_rate	double[XP_SIZE_TARGET_RESULT_AUX]	[0]	Radius of curvature-rate-rate in the look direction at the nadir of the target (Earth fixed CS)	m/s	-
		[1]	Distance-rate-rate from the nadir of the target to the satellite nadir. (Earth fixed CS)	m	>= 0
		[2]	Distance-rate-rate from the nadir of the target to the ground track (Earth fixed CS)	m/s	-
		[3]	Distance-rate-rate from the SSP to the point located on the ground track that is at a minimum distance from the nadir of the target (Earth fixed CS)		
		[4:XP_SIZE_TARGET_RESULT_AUX]	(dummy)	-	-

*Table 275: Output parameters of xp\_target\_extra\_aux*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ierr	long	-	Error vector	-	-

### 7.76.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_extra\_aux** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_extra\_aux** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 276: Error messages of xp\_target\_extra\_aux function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	No target data available	No calculation performed	XP_CFI_TARGET_EXTRA_AUX_NO_DATA_ERR	0
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_AUX_NO_SUCH_USER_TARGET_ERR	1
ERR	The target does not exist	No calculation performed.	XP_CFI_TARGET_EXTRA_AUX_NO_SUCH_LOS_TARGET_ERR	2
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_AUX_NO_SUCH_EARTH_TARGET_ERR	3
ERR	Could not compute the DEM target	No calculation performed	XP_CFI_TARGET_EXTRA_AUX_EARTH_TARGET_COMPUT_ERR	4
ERR	Wrong target type	No calculation performed	XP_CFI_TARGET_EXTRA_AUX_WRONG_TARGET_TYPE_ERR	5
ERR	Invalid time reference in target data	No calculation performed	XP_CFI_TARGET_EXTRA_AUX_INVALID_TIME_REFERENCE	6
ERR	Error calling to XL_Car_Geo CFI function	No calculation performed	XP_CFI_TARGET_EXTRA_AUX_CAR_TO_GEO_ERR	7
ERR	Error getting transformation matrix to Topocentric CS.	No calculation performed	XP_TARGET_EXTRA_AUX_TOPO_ERR	8

*Table 276: Error messages of xp\_target\_extra\_aux function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Error getting direction angles	No calculation performed	XP_CFI_TARGET_EXTRA_A UX_DIR_POINTING_ERR	9
ERR	Error computing radius of curvature	No calculation performed	XP_CFI_TARGET_EXTRA_A UX_RADII_CURVATURE_C ALC_ERR	10
ERR	Error computing pointing after crossing the Earth atmosphere	No calculation performed	XP_CFI_TARGET_EXTRA_A UX_POINTING_AFTER_ATM _CALC_ERR	11
ERR	Error computing distance	No calculation performed	XP_CFI_TARGET_EXTRA_A UX_DISTANCE_CALC_ERR	12
ERR	Error computing velocity of the target's nadir	No calculation performed	XP_CFI_TARGET_EXTRA_A UX_TOP_VEL_CALC_ERR	13
WARN	Error computing MLST of TLST	Calculation performed	XP_CFI_TARGET_EXTRA_A UX_MLST_OR_TLST_CALC_ ERR	14
WARN	Warning: Path from satellite to target occulted by the Earth	Calculation performed	XP_CFI_TARGET_EXTRA_A UX_NEGATIVE_ALTITUDE_ WARN	15
WARN	Warning calling to XL_Car_Geo CFI function	Calculation performed,	XP_CFI_TARGET_EXTRA_A UX_AMBIGUOUS_SINGULA R_WARN	16
WARN	Warning: Derivatives cannot be calculated	Calculation performed,	XP_CFI_TARGET_EXTRA_A UX_DERIV_WARN	17

### **7.76.6 Runtime Performances**

The following runtime performances have been measured.

*Table 277: Runtime performances of xp\_target\_extra\_aux*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.77 xp\_target\_extra\_ef\_target

### 7.77.1 Overview

The **xp\_target\_extra\_ef\_target** CFI function computes the parameter for an Earth fixed target related to the target in input data structure.

### 7.77.2 Calling Interface

The calling interface of the **xp\_target\_extra\_ef\_target** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long target_type, target_number, choice;
    double freq;
    double ef_target_results_rate[XP_SIZE_EF_TARGET_RESULT],
    ef_target_results_rate_rate[XP_SIZE_EF_TARGET_RESULT];
    xp_target_id target_id = {NULL};
    long ierr[XP_NUM_ERR_TARGET_EXTRA_EF_TARGET], status;

    status = xp_target_extra_ef_target(&target_id, &choice,
                                     &target_type, &target_number, &freq,
                                     ef_target_results_rate,
                                     ef_target_results_rate_rate, ierr);
}
```

The `XP_SIZE_TARGET_RESULT_EF_TARGET` and `XP_NUM_ERR_TARGET_EXTRA_EF_TARGET` constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, TARGET_TYPE, TARGET_ID
    REAL*8 EF_TARGET_RESULTS_RATE(XP_SIZE_EF_TARGET_RESULT),
    & EF_TARGET_RESULTS_RATE_RATE(XP_SIZE_EF_TARGET_RESULT),
    & FREQ
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_RESULT_EF_TARGET), STATUS

    STATUS = XP_TARGET_EXTRA_EF_TARGET(SAT_ID, TARGET_TYPE,
    &                                     TARGET_ID, FREQ,
    &                                     EF_TARGET_RESULTS_RATE,
```

& EF\_TARGET\_RESULTS\_RATE\_RATE ,  
 & IERR )

### 7.77.3 Input Parameters

The `xp_target_extra_ef_target` CFI function has the following input parameters:

*Table 278: Input parameters of `xp_target_extra_ef_target` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
choice	long *	-	Flag to select the extra results to be computed. Even though derivatives could be requested by user, they will not be calculated if the target was computed without derivatives (a warning is raised in this case).	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
target_type	long *	-	Flag to select the type of target	-	XP_USER_TARGET_TYPE XP_LOS_TARGET_TYPE XP_DEM_TARGET_TYPE
target_number	long *	-	Target number	-	>= 0
freq	double *	-	Frequency of the signal	Hz	>=0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Choice. (See table 3).

### 7.77.4 Output Parameters

The output parameters of the **xp\_target\_extra\_ef\_target** CFI function are:

Table 279: Output parameters of *xp\_target\_extra\_ef\_target*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ef_target_results_rate	double [XP_SIZE_EF_TARGET_RESULT]	[0]	2-way Doppler shift of the signal (Earth Fixed CS)	Hz	-
		[1]	Earthfixed target to satellite range-rate. (Earth Fixed CS)	m/s	-
		[2]	Earthfixed target to satellite azimuth-rate. (Topocentric CS)	deg/s	-
		[3]	Earthfixed target to satellite elevation-rate. (Topocentric CS)	deg/s	-
		[4]	Satellite to earthfixed target azimuth-rate. (Topocentric CS)	deg/s	-
		[5]	Satellite to earthfixed target elevation-rate. (Topocentric CS)	deg/s	-
		[6]	Satellite to earthfixed target azimuth-rate. (Attitude Frame)	deg/s	-
		[7]	Satellite to earthfixed target elevation-rate. (Attitude Frame)	deg/s	-
ef_target_results_rate_rate	double [XP_SIZE_EF_TARGET_RESULT]	[0]	(dummy)	-	-
		[1]	Earthfixed target to satellite range-rate-rate. (Earth Fixed CS)	m/s <sup>2</sup>	-
		[2]	Earthfixed target to satellite azimuth-rate-rate. (Topocentric CS)	deg/s <sup>2</sup>	-
		[3]	Earthfixed target to satellite elevation-rate-rate. (Topocentric CS)	deg/s <sup>2</sup>	-
		[4]	Satellite to earthfixed target azimuth-rate-rate. (Topocentric CS)	deg/s <sup>2</sup>	-
		[5]	Satellite to earthfixed target elevation-rate-rate. (Topocentric CS)	deg/s <sup>2</sup>	-
		[6]	Satellite to earthfixed target azimuth-rate-rate. (Attitude Frame)	deg/s <sup>2</sup>	-

*Table 279: Output parameters of xp\_target\_extra\_ef\_target*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
		[7]	Satellite to earthfixed target elevation-rate-rate. (Attitude Frame)	deg/s <sup>2</sup>	-
ierr	long	-	Error vector	-	-

### 7.77.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_extra\_ef\_target** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_extra\_ef\_target** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 280: Error messages of xp\_target\_extra\_ef\_target function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	No target data available	No calculation performed	XP_CFI_TARGET_EXTRA_E F_TARGET_NO_DATA_ERR	0
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_E F_TARGET_NO_SUCH_USER _TARGET_ERR	1
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_E F_TARGET_NO_SUCH_LOS _TARGET_ERR	2
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_EXTRA_E F_TARGET_NO_SUCH_EAR TH_TARGET_ERR	3
ERR	Could not compute the DEM target	No calculation performed	XP_CFI_TARGET_EXTRA_E F_TARGET_EARTH_TARGE T_COMPUT_ERR	4
ERR	Wrong target type	No calculation performed	XP_CFI_TARGET_EXTRA_E F_TARGET_WRONG_TARGE T_TYPE_ERR	5
ERR	Wrong input deriv flag	No calculation performed	XP_CFI_TARGET_EXTRA_E F_TARGET_DERIV_FLAG_E RR	6



*Table 280: Error messages of xp\_target\_extra\_ef\_target function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Error getting target geodetic coordinates	No calculation performed	XP_CFI_TARGET_EXTRA_EF_TARGET_GEO_COORD_ERR	7
ERR	Invalid time reference in target data	No calculation performed	XP_CFI_TARGET_EXTRA_EF_TARGET_INVALID_TIME_REF_ERR	8
ERR	Internal computation error	No calculation performed	XP_CFI_TARGET_EXTRA_EF_TARGET_RANGE_OR_POINTING_CALC_ERR	9
ERR	Wrong Atmospheric model in target data	No calculation performed	XP_CFI_TARGET_EXTRA_EF_TARGET_MODE_COMBINATION_SWITCHES_ERR	10
ERR	Error calling to XL_Car_Geo CFI function	No calculation performed	XP_CFI_TARGET_EXTRA_EF_TARGET_CAR_GEO_ERR	11
WARN	2nd. Derivatives are not available	Calculation performed	XP_CFI_TARGET_EXTRA_EF_TARGET_DER_2ND_NOT_AVAIL_WARN	12
WARN	Warning calling to XL_Car_Geo CFI function	Calculation performed	XP_CFI_TARGET_EXTRA_EF_TARGET_AMBIGUOUS_SINGULAR_WARN	13
WARN	1ST Derivative not computed for target. Satellite to target azimuth and elevation rates (SRAR CS) cannot be calculated	Calculation performed, except for azimuth and elevation rates in SRAR coordinate system.	XP_CFI_TARGET_EXTRA_EF_TARGET_DERIV_FLAG_WARN	14

### 7.77.6 Runtime Performances

The following runtime performances have been measured.

*Table 281: Runtime performances of xp\_target\_extra\_ef\_target*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.78 xp\_target\_extra\_target\_to\_sun

### 7.78.1 Overview

The `xp_target_extra_target_to_sun` CFI function computes extra parameters related to the pointing from the target in input data structure to the sun.

### 7.78.2 Calling Interface

The calling interface of the `xp_target_extra_target_to_sun` CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long target_type, target_number, choice, iray;
    double freq;
    double sun_results[XP_SIZE_SUN_RESULT],
           sun_results_rate[XP_SIZE_SUN_RESULT],
           sun_results_rate_rate[XP_SIZE_SUN_RESULT];
    xp_target_id  target_id = {NULL};
    long ierr[XP_NUM_ERR_TARGET_EXTRA_TARGET_TO_SUN], status;

    status = xp_target_extra_target_to_sun
              (&target_id, &choice, &target_type,
               &target_number, &iray, &freq,
               sun_results, sun_results_rate,
               sun_results_rate_rate, ierr);
}
```

The `XP_SIZE_TARGET_RESULT_TARGET_TO_SUN` and `XP_NUM_ERR_TARGET_EXTRA_TARGET_TO_SUN` constants are defined in the file `explorer_pointing.h`.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, TARGET_TYPE, TARGET_ID, DERIV_FLAG, IRAY
    REAL*8 SUN_RESULTS(XP_SIZE_SUN_RESULT),
    & SUN_RESULTS_RATE(XP_SIZE_SUN_RESULT),
    & SUN_RESULTS_RATE_RATE(XP_SIZE_SUN_RESULT),
    & FREQ
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_EXTRA_TARGET_TO_SUN), STATUS
```

```

STATUS = XP_TARGET_EXTRA_TARGET_TO_SUN
        (SAT_ID, TARGET_TYPE, TARGET_ID, DERIV_FLAG,
&        IRAY, FREQ,
&        SUN_RESULTS, SUN_RESULTS_RATE,
&        SUN_RESULTS_RATE_RATE, IERR)
    
```

### 7.78.3 Input Parameters

The `xp_target_extra_target_to_sun` CFI function has the following input parameters:

*Table 282: Input parameters of `xp_target_extra_target_to_sun` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
choice	long *	-	Flag to select the extra results to be computed. Even though derivatives could be requested by user, they will not be calculated if the target was computed without derivatives (a warning is raised in this case).	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
target_type	long *	-	Flag to select the type of target	-	XP_USER_TARGET_TYPE XP_LOS_TARGET_TYPE XP_DEM_TARGET_TYPE
target_number	long *	-	Target number	-	>= 0
iray	long *	-	Ray tracing model switch	-	Complete
freq	double *	-	Frequency of the signal	Hz	>=0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Choice. (See table 3).
- Ray tracing model: iray. (See table 3).

### 7.78.4 Output Parameters

The output parameters of the **xp\_target\_extra\_target\_to\_sun** CFI function are:

Table 283: Output parameters of *xp\_target\_extra\_target\_to\_sun*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
sun_results	double [XP_SIZE_SUN_RESULT]	[0]	Target to Sun (centre) azimuth. (Topocentric CS)	deg	$\geq 0$ $< 360$
		[1]	Target to Sun (centre) elevation. (Topocentric CS)	deg	$\geq -90$ $\leq +90$
		[2]	Tangent altitude over the Earth in the target to Sun (centre) look direction. (Earth fixed CS)	m	-
		[3]	Target to Sun visibility flag: <ul style="list-style-type: none"> <li>• - 1: Sun eclipsed by the Earth.</li> <li>• +1: Sun in sight.</li> </ul>	-	+1, -1
		[4:XP_SIZE_SUN_RESULT]	(dummy)	-	-
sun_results_rate	double [XP_SIZE_SUN_RESULT]	[0]	Target to Sun (centre) azimuth-rate. (Topocentric CS)	deg/s	-
		[1]	Target to Sun (centre) elevation-rate. (Topocentric CS)	deg/s	-
		[2:XP_SIZE_SUN_RESULT]	(dummy)	-	-
sun_results_rate_rate	double [XP_SIZE_SUN_RESULT]	[0]	Target to Sun (centre) azimuth-rate. (Topocentric CS)	deg/s <sup>2</sup>	-
		[1]	Target to Sun (centre) elevation-rate. (Topocentric CS)	deg/s <sup>2</sup>	-
		[2:XP_SIZE_SUN_RESULT]	(dummy)	-	-
ierr	long	-	Error vector	-	-

### 7.78.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_extra\_target\_to\_sun** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_extra\_target\_to\_sun** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 284: Error messages of xp\_target\_extra\_target\_to\_sun function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	No target data available	No calculation performed	XP_CFI_TARGET_TO_SUN_NO_DATA_ERR	0
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_TO_SUN_NO_SUCH_USER_TARGET_ERR	1
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_TO_SUN_NO_SUCH_LOS_TARGET_ERR	2
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_TO_SUN_NO_SUCH_EARTH_TARGET_ERR	3
ERR	Could not compute the DEM target	No calculation performed	XP_CFI_TARGET_TO_SUN_EARTH_TARGET_COMPUT_ERR	4
ERR	Wrong target type	No calculation performed	XP_CFI_TARGET_TO_SUN_WRONG_TARGET_TYPE_ERR	5
ERR	Wrong input deriv flag	No calculation performed	XP_CFI_TARGET_TO_SUN_DERIV_FLAG_ERR	6
ERR	Error getting Sun position	No calculation performed	XP_CFI_TARGET_TO_SUN_SUN_POS_ERR	7
ERR	Invalid time reference in target data.	No calculation performed	XP_CFI_TARGET_TO_SUN_INVALID_TIME_REF_ERR	8
ERR	Error changing from TOD to EF.	No calculation performed	XP_CFI_TARGET_TO_SUN_TOD_TO_EF_ERR	9
ERR	Error getting direction vector from target to Sun.	No calculation performed	XP_CFI_TARGET_TO_SUN_DIR_VECTOR_ERR	10
ERR	Error getting geodetic coordinates of the target	No calculation performed	XP_CFI_TARGET_TO_SUN_CAR_GEO_ERR	11
ERR	Internal Computation Error. Target not Found.	No calculation performed	XP_CFI_TARGET_TO_SUN_TARGET_NOT_FOUND_ERR	12

*Table 284: Error messages of xp\_target\_extra\_target\_to\_sun function*

<b>Error type</b>	<b>Error message</b>	<b>Cause and impact</b>	<b>Error code</b>	<b>Error No</b>
ERR	Wrong Atmospheric model in target data.	No calculation performed	XP_CFI_TARGET_TO_SUN_MODE_COMBINATION_SWITCHES_ERR	13
ERR	Error getting transformation matrix to Topocentric CS.	No calculation performed	XP_CFI_TARGET_TO_SUN_TOPO_ERR	14
ERR	Error getting Azimut/Elevation	No calculation performed	XP_CFI_TARGET_TO_SUN_DIR_POINTING_ERR	15
WARN	Input Derivative flag level is too high. Derivative flag set to the value used in the main target function	Calculation performed	XP_CFI_TARGET_TO_SUN_DERIV_FLAG_WARN	16
WARN	Precision not reached while calculating Sun pointing parameters	Calculation performed	XP_CFI_TARGET_TO_SUN_MAX_ALLOWED_ITERATIONS_WARN	17

### **7.78.6 Runtime Performances**

The following runtime performances have been measured.

*Table 285: Runtime performances of xp\_target\_extra\_target\_to\_sun*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.79 xp\_target\_extra\_target\_to\_moon

### 7.79.1 Overview

The **xp\_target\_extra\_target\_to\_moon** CFI function computes extra parameters related to the pointing from the target in input data structure to the moon.

### 7.79.2 Calling Interface

The calling interface of the **xp\_target\_extra\_target\_to\_moon** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long target_type, target_number, choice, iray;
    double freq;
    double moon_results[XP_SIZE_moon_RESULT],
           moon_results_rate[XP_SIZE_MOON_RESULT],
           moon_results_rate_rate[XP_SIZE_MOON_RESULT];
    xp_target_id  target_id = {NULL};
    long ierr[XP_NUM_ERR_TARGET_EXTRA_TARGET_TO_MOON], status;

    status = xp_target_extra_target_to_moon
              (&target_id, &choice, &target_type,
               &target_number, &iray, &freq,
               moon_results, moon_results_rate,
               moon_results_rate_rate, ierr);
}
```

The `XP_SIZE_TARGET_RESULT_TARGET_TO_MOON` and `XP_NUM_ERR_TARGET_EXTRA_TARGET_TO_MOON` constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 SAT_ID, TARGET_TYPE, TARGET_ID, DERIV_FLAG, IRAY
    REAL*8 MOON_RESULTS(XP_SIZE_MOON_RESULT),
    & MOON_RESULTS_RATE(XP_SIZE_MOON_RESULT),
    & MOON_RESULTS_RATE_RATE(XP_SIZE_MOON_RESULT),
    & FREQ
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_EXTRA_TARGET_TO_MOON), STATUS
```

```

STATUS = XP_TARGET_EXTRA_TARGET_TO_MOON
        (SAT_ID, TARGET_TYPE, TARGET_ID, DERIV_FLAG,
&        IRAY, FREQ,
&        MOON_RESULTS, MOON_RESULTS_RATE,
&        MOON_RESULTS_RATE_RATE, IERR)
    
```

### 7.79.3 Input Parameters

The `xp_target_extra_target_to_moon` CFI function has the following input parameters:

*Table 286: Input parameters of `xp_target_extra_target_to_moon` function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
choice	long *	-	Flag to select the extra results to be computed. Even though derivatives could be requested by user, they will not be calculated if the target was computed without derivatives (a warning is raised in this case).	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
target_type	long *	-	Flag to select the type of target	-	XP_USER_TARGET_TYPE XP_LOS_TARGET_TYPE XP_DEM_TARGET_TYPE
target_number	long *	-	Target number	-	>= 0
iray	long *	-	Ray tracing model switch	-	Complete
freq	double *	-	Frequency of the signal	Hz	>=0

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Choice. (See table 3).
- Ray tracing model: iray. (See table 3).



## 7.79.4 Output Parameters

The output parameters of the `xp_target_extra_target_to_moon` CFI function are:

Table 287: Output parameters of `xp_target_extra_target_to_moon`

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
moon_results	double [XP_SIZE_MOON_RESULT]	[0]	Target to Moon (centre) azimuth. (Topocentric CS)	deg	$\geq 0$ $< 360$
		[1]	Target to Moon (centre) el. (Topocentric CS)	deg	$\geq -90$ $\leq +90$
		[2]	Tangent altitude over the Earth in the target to Moon (centre) look direction. (Earth fixed CS)	m	-
		[3]	Target to Moon visibility flag: <ul style="list-style-type: none"> <li>• - 1: Moon eclipsed by the Earth.</li> <li>• +1: Moon in sight.</li> </ul>	-	+1, -1
		[4:XP_SIZE_MOON_RESULT]	(dummy)	-	-
moon_results_rate	double [XP_SIZE_MOON_RESULT]	[0]	Target to Moon (centre) azimuth-rate. (Topocentric CS)	deg/s	-
		[1]	Target to Moon (centre) elevation-rate. (Topocentric CS)	deg/s	-
		[2:XP_SIZE_MOON_RESULT]	(dummy)	-	-
moon_results_rate_rate	double [XP_SIZE_MOON_RESULT]	[0]	Target to Moon (centre) azimuth-rate. (Topocentric CS)	deg/s <sup>2</sup>	-
		[1]	Target to Moon (centre) elevation-rate. (Topocentric CS)	deg/s <sup>2</sup>	-
		[2:XP_SIZE_MOON_RESULT]	(dummy)	-	-

*Table 287: Output parameters of xp\_target\_extra\_target\_to\_moon*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ierr	long	-	Error vector	-	-

### 7.79.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_extra\_target\_to\_moon** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_extra\_target\_to\_moon** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 288: Error messages of xp\_target\_extra\_target\_to\_moon function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	No target data available	No calculation performed	XP_CFI_TARGET_TO_MOON_NO_DATA_ERR	0
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_TO_MOON_NO_SUCH_USER_TARGET_ERR	1
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_TO_MOON_NO_SUCH_LOS_TARGET_ERR	2
ERR	The target does not exist	No calculation performed	XP_CFI_TARGET_TO_MOON_NO_SUCH_EARTH_TARGET_ERR	3
ERR	Could not compute the DEM target	No calculation performed	XP_CFI_TARGET_TO_MOON_EARTH_TARGET_COMPUT_ERR	4
ERR	Wrong target type	No calculation performed	XP_CFI_TARGET_TO_MOON_WRONG_TARGET_TYPE_ERR	5
ERR	Wrong input deriv flag	No calculation performed	XP_CFI_TARGET_TO_MOON_DERIV_FLAG_ERR	6
ERR	Error getting Moon position	No calculation performed	XP_CFI_TARGET_TO_MOON_MOON_POS_ERR	7
ERR	Invalid time reference in target data.	No calculation performed	XP_CFI_TARGET_TO_MOON_INVALID_TIME_REF_ERR	8
ERR	Error changing from TOD to EF.	No calculation performed	XP_CFI_TARGET_TO_MOON_TOD_TO_EF_ERR	9

*Table 288: Error messages of xp\_target\_extra\_target\_to\_moon function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Error getting direction vector from target to Moon.	No calculation performed	XP_CFI_TARGET_TO_MOON_DIR_VECTOR_ERR	10
ERR	Error getting geodetic coordinates of the target	No calculation performed	XP_CFI_TARGET_TO_MOON_CAR_GEO_ERR	11
ERR	Internal Computation Error. Target not Found.	No calculation performed	XP_CFI_TARGET_TO_MOON_TARGET_NOT_FOUND_ERR	12
ERR	Wrong Atmospheric model in target data.	No calculation performed	XP_CFI_TARGET_TO_MOON_MODE_COMBINATION_SWITCHES_ERR	13
ERR	Error getting tranformation matrix to Topocentric CS.	No calculation performed	XP_CFI_TARGET_TO_MOON_TOPO_ERR	14
ERR	Error getting Azimut/Elevation	No calculation performed	XP_CFI_TARGET_TO_MOON_DIR_POINTING_ERR	15
WARN	Input Derivative flag level is too high. Derivative flag set to the value used in the main target function	Calculation performed	XP_CFI_TARGET_TO_MOON_DERIV_FLAG_WARN	16
WARN	Precision not reached while calculating Moon pointing parameters	Calculation performed	XP_CFI_TARGET_TO_MOON_MAX_ALLOWED_ITERATIONS_WARN	17

### **7.79.6 Runtime Performances**

The following runtime performances have been measured.

*Table 289: Runtime performances of xp\_target\_extra\_target\_to\_moon*

<b>Ultra Sparc II-400 [ms]</b>
TBD

## 7.80 xp\_target\_extra\_specular\_reflectionn

### 7.80.1 Overview

The **xp\_target\_extra\_specular\_reflection** CFI function calculates the direction of the specular reflection associated to a given target.

### 7.80.2 Calling Interface

The calling interface of the **xp\_target\_extra\_specular\_reflection** CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    long target_type, target_number, choice, iray;
    double freq;
    double spec_reflec_results[XP_SIZE_TARGET_RESULT_SPEC_REFL],
        spec_reflec_results_rate[XP_SIZE_TARGET_RESULT_SPEC_REFL],
        spec_reflec_results_rate_rate[XP_SIZE_TARGET_RESULT_SPEC_REFL];
    xp_target_id target_id = {NULL};
    long ierr[XP_NUM_ERR_TARGET_EXTRA_SPEC_REFL], status;

    status = xp_target_extra_specular_reflection
              (&target_id, &choice, &target_type,
               &target_number,
               &deflection_north, &deflection_east,
               spec_reflec_results,
               spec_reflec_results_rate,
               spec_reflec_results_rate_rate, ierr);
}
```

The XP\_SIZE\_TARGET\_RESULT\_SPEC\_REFL and XP\_NUM\_ERR\_TARGET\_EXTRA\_SPEC\_REFL constants are defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the #include statement):

```
#include <explorer_pointing.inc>
TBD
```

### 7.80.3 Input Parameters

The **xp\_target\_extra\_specular\_reflection** CFI function has the following input parameters:

*Table 290: Input parameters of xp\_target\_extra\_specular\_reflection function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id*	-	Structure that contains the Target results	-	-
choice	long *	-	Flag to select the extra results to be computed. Even though derivatives could be requested by user, they will not be calculated if the target was computed without derivatives (a warning is raised in this case).	-	Allowed values: (0) XP_NO_DER (1) XP_DER_1ST (2) XP_DER_2ND
target_type	long *	-	Flag to select the type of target	-	XP_USER_TARGET_TYPE XP_LOS_TARGET_TYPE XP_DEM_TARGET_TYPE
target_number	long *	-	Target number	-	>= 0
deflection_north	double *	-	North-South component of the vertical deflection	deg	>= -90 < = 90
deflection_east	double *	-	East-West component of the vertical deflection	deg	>= -90 < = 90

It is possible to use enumeration values rather than integer values for some of the input arguments:

- Choice. (See table 3).

### 7.80.4 Output Parameters

The output parameters of the **xp\_target\_extra\_specular\_reflection** CFI function are:

*Table 291: Output parameters of xp\_target\_extra\_specular\_reflection*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
spec_reflec_results	double [XP_SIZE_TARGET_RESULT_SPEC_REFL]	[0]	X coordinate of reflected pointing direction (EF CS)	m	-
		[1]	Y coordinate of reflected pointing direction (EF CS)	m	-
		[2]	Z coordinate of reflected pointing direction (EF CS)	m	-
		[3]	Azimuth of the reflected pointing direction (Topocentric CS)	deg	[0, 360)
		[4]	Elevation of the reflected pointing direction (Topocentric CS)	deg	[-90, 90]
		[5]	Right ascension at which the reflected pointing direction points at target point. (True of Date CS)	deg	[0, 360)
		[6]	Elevation at which the reflected pointing direction points at target point. (True of Date CS)	deg	[-90, 90]
spec_reflec_results_rate	double [XP_SIZE_TARGET_RESULT_SPEC_REFL]	[0]	X velocity of reflected pointing direction (EF CS)	m/s	-
		[1]	Y velocity of reflected pointing direction (EF CS)	m/s	-
		[2]	Z velocity of reflected pointing direction (EF CS)	m/s	-

Table 291: Output parameters of *xp\_target\_extra\_specular\_reflection*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
		[3]	Azimuth rate of the reflected pointing direction (Topocentric CS)	deg/s	-
		[4]	Elevation rate of the reflected pointing direction (Topocentric CS)	deg/s	-
		[5]	Right ascension rate at which the reflected pointing direction points at target point. (True of Date CS)	deg/s	-
		[6]	Elevation rate at which the reflected pointing direction points at target point. (True of Date CS)	deg/s	-
spec_reflec_results_rate	double [XP_SIZE_TARGET_RESULT_SPEC_REFL]	[0]	X acceleration of reflected pointing direction (EF CS)	m/s <sup>2</sup>	-
		[1]	Y acceleration of reflected pointing direction (EF CS)	m/s <sup>2</sup>	-
		[2]	Z acceleration of reflected pointing direction (EF CS)	m/s <sup>2</sup>	-
		[3]	Azimuth rate rate of the reflected pointing direction (Topocentric CS)	deg/s <sup>2</sup>	-
		[4]	Elevation rate rate of the reflected pointing direction (Topocentric CS)	deg/s <sup>2</sup>	-
		[5]	Right ascension rate rate at which the reflected pointing direction points at target point. (True of Date CS)	deg/s <sup>2</sup>	-
		[6]	Elevation rate rate at which the reflected pointing direction points at target point. (True of Date CS)	deg/s <sup>2</sup>	-
ierr	long	-	Error vector	-	-

### 7.80.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_extra\_specular\_reflection**CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_extra\_specular\_reflection** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM])

*Table 292: Error messages of xp\_target\_extra\_specular\_reflection function*

Error type	Error message	Cause and impact	Error code	Error No
	TBD			

### 7.80.6 Runtime Performances

The following runtime performances have been measured.

*Table 293: Runtime performances of xp\_target\_extra\_specular\_reflection*

<b>Ultra Sparc II-400 [ms]</b>
TBD



## 7.81 xp\_target\_close

### 7.81.1 Overview

The `xp_target_close` CFI function cleans up any memory allocation performed by the Target functions.

### 7.81.2 Calling Interface

The calling interface of the `xp_target_close` CFI function is the following (input parameters are underlined):

```
#include <explorer_pointing.h>
{
    xp_target_id target_id = {NULL};
    long ierr[XP_NUM_ERR_TARGET_CLOSE], status;

    status = xp_target_close(&target_id, ierr);
}
```

The `XP_NUM_ERR_TARGET_CLOSE` constant is defined in the file *explorer\_pointing.h*.

For Fortran programs the declaration and calling procedure is as follows (input parameters are underlined, note that the C preprocessor must be used because of the presence of the `#include` statement):

```
#include <explorer_pointing.inc>
    INTEGER*4 IERR(XP_NUM_ERR_TARGET_INIT), STATUS

    STATUS = XP_TARGET_CLOSE(SAT_ID, INSTRUMENT_ID, IERR)
```

### 7.81.3 Input Parameters

The **xp\_target\_close** CFI function has the following input parameters:

*Table 294: Input parameters of xp\_target\_close function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id*	-	Structure that contains the Target results	-	-

### 7.81.4 Output Parameters

The output parameters of the **xp\_target\_close** CFI function are:

*Table 295: Output parameters of xp\_target\_close*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
ierr	long	-	Error vector	-	-

### 7.81.5 Warnings and Errors

Next table lists the possible error messages that can be returned by the **xp\_target\_close** CFI function after translating the returned error vector into the equivalent list of error messages by calling the function of the EXPLORER\_POINTING software library **xp\_get\_msg** (see [GEN\_SUM]).

This table also indicates the type of message returned, i.e. either a warning (WARN) or an error (ERR), the cause of such a message and the impact on the performed calculation.

The table is completed by the error code and value. These error codes can be obtained by translating the error vector returned by the **xp\_target\_close** function by calling the function of the EXPLORER\_POINTING software library **xp\_get\_code** (see [GEN\_SUM]).

*Table 296: Error messages of xp\_target\_close function*

Error type	Error message	Cause and impact	Error code	Error No
ERR	Target ID is not initialized or it is being used	No calculation performed	XP_CFI_TARGET_CLOSE_WRONG_ID_ERR	11

### 7.81.6 Runtime Performances

The following runtime performances have been measured.

*Table 297: Runtime performances of xp\_target\_close*

Ultra Sparc II-400 [ms]
TBD

## 7.82 xp\_target\_get\_id\_data

### 7.82.1 Overview

The `xp_target_get_id_data` CFI function returns the target initialization data.

### 7.82.2 Calling interface

The calling interface of the `xp_target_get_id_data` CFI function is the following:

```
#include <explorer_lib.h>
{
    xp_target_id target_id;
    long status;
    xp_target_id_data data;
    status = xp_target_get_id_data (&target_id, &data);
}
```

For Fortran programs the declaration and calling procedure is as follows (note that the C preprocessor must be used because of the presence of the `#include` statement):

TBD

### 7.82.3 Input parameters

The `xp_target_get_id_data` CFI function has the following input parameters:

*Table 298: Input parameters of xp\_target\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
target_id	xp_target_id *	-	Target Id.	-	-

### 7.82.4 Output parameters

The output parameters of the `xp_target_get_id_data` CFI function are:

*Table 299: Output parameters of xp\_target\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
xp_target_get_id_data	long	-	Status flag	-	-

*Table 299: Output parameters of xp\_target\_get\_id\_data function*

C name	C type	Array Element	Description (Reference)	Unit (Format)	Allowed Range
data	xp_target_id_data	-	Target initialization data	-	-

### **7.82.5 Warnings and errors**

This function does not return any error/warning code. Only the status of the function indicates if the execution was correct or not.

The possible causes of error are:

- The target\_id was not computed.

### **7.82.6 Runtime performances**

The following runtime performances have been estimated.

*Table 300: Runtime performances of xp\_target\_get\_id\_data function*

Ultra Sparc II-400 [ms]
TBD


## 7.83 xp\_converter

### 7.83.1 Overview

Before calling a target CFI function using `iray = 400` or `iray = 4000` (user's predefined refraction ray tracing models), the atmosphere model should be initialised using a user's file containing the description of the atmosphere. This file can be generated using the executable program **xp\_converter**.

**xp\_converter** allows the user to select different atmosphere models to obtain different corrective functions, each of them with a given latitude band and a given validity time. The output file name should be defined in the environmental variable `XP_USER_REF_CONV_FILE_NAME`, before running **xp\_converter**. If the variable is not defined the function returns an error.

The overall data flow of **xp\_converter** and **xp\_target\_xxx** for a user predefined refraction ray tracing model is as follows:

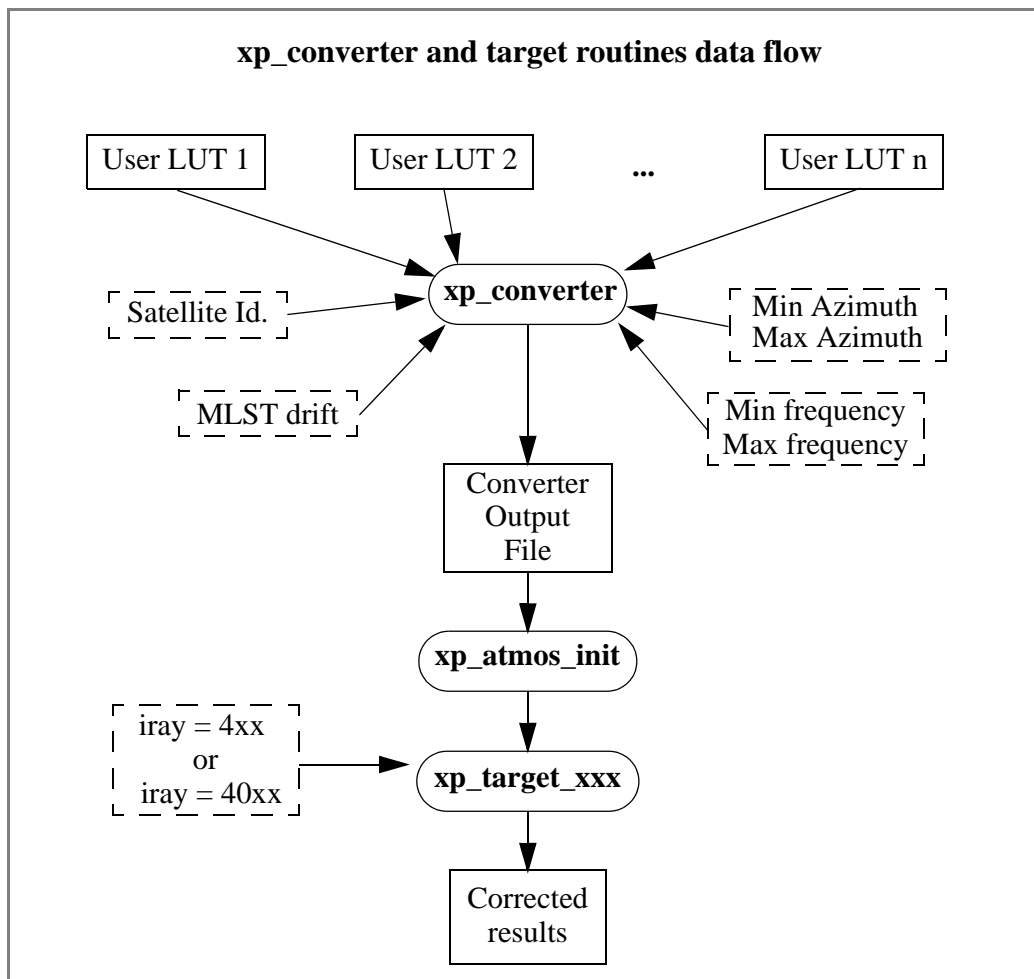

### 7.83.2 Calling interface

**xp\_converter** shall be called from a UNIX or WINDOWS shell as follows:

```
xp_converter -sat satellite_id
             -cif User_LUT_1
             [-cif User_LUT_2]
             ...
             [-cif User_LUT_n]
             -min_az min_azimuth
             -max_az max_azimuth
             -min_freq min_frequency
             -max_freq max_frequency
             -mlst_dr mlst_drift
             [-v]
             [-xl_v]
             [-xo_v]
             [-xp_v]
             [-help]
```

taking into account the following considerations:

- Order of parameters does not matter
- Bracketed parameters are not mandatory
- *xl\_v* for *explorer\_lib* verbose mode.
- *xo\_v* for *explorer\_orbit* verbose mode.
- *xp\_v* for *explorer\_pointing* verbose mode.
- *v* for Verbose mode for the 3 libraries (default is silent).
- *help* option will print the above text on stderr (no execution).

### 7.83.3 Input parameters

The **xp\_converter** executable program has the following input parameters:

*Table 301: Input parameters for xp\_converter*

Keyword	Value after keyword	Type	Description	Unit	Allowed Range
cif	User_LUT_i	string	Name of the LUT file (input file, path included). The number of LUTs is arbitrary.	-	-
sat	satellite_id	long	Satellite ID	-	Complete

*Table 301: Input parameters for xp\_converter*

Keyword	Value after keyword	Type	Description	Unit	Allowed Range
min_az	min_azimuth	double	Minimum azimuth value of the looking direction to be considered in computations.	deg	$0 \leq \text{min\_az} < 360.0$
max_az	max_azimuth	double	Maximum azimuth value of the looking direction to be considered in computations.	deg	$0 \leq \text{max\_az} < 360.0$
min_freq	min_frequency	double	Minimum frequency value to be considered in computations.	MHz	$0 \leq \text{min\_freq}$
max_freq	max_frequency	double	Maximum frequency value to be considered in computations.	MHz	$0 \leq \text{max\_freq}$
mlst_dr	mlst_drift	double	MLST drift of the orbit	secs/day	$\text{mlst\_drift} \geq 0$

### 7.83.4 Output

In addition to the **xp\_converter** output file, some intermediate output files are produced with data that can be plotted. They are named *interm\_outp\_file\_xx.dat* (where *xx* is the number of the LUT file) and *interm\_outp\_file\_av.dat* (for the average) and they can be plotted with **gnuplot** (in a UNIX shell).

For **xp\_target\_xxx** CFI function, the selection of the user atmosphere determines the correction to be applied to the parameters of the unrefracted tangent point (tangent altitude, etc.). The following table defines the relation between the iray input parameter and the selected corrective function:

*Table 302: iray input vs corrective function.*

IRAY	Mnemonic	Description
400	PP_LUT_REF	Average User-defined Corrective function
401	PP_LUT_REF + 1	First User-defined Corrective function
...		
400 + n	PP_LUT_REF + n	Last User-defined Corrective function ( <i>n</i> being the number of LUT input files for xp_converter)
4000	PP_LUT_REF_N	Average User-defined Corrective function (No refraction in Sun and Moon related parameters).
4001	PP_LUT_REF_N + 1	First User-defined Corrective function (No refraction in Sun and Moon related parameters).
...		

*Table 302: iray input vs corrective function.*

IRAY	Mnemonic	Description
4000 + n	PP_LUT_REF_N + n	Last User-defined Corrective function (No refraction in Sun and Moon related parameters).



---

## 8 LIBRARY PRECAUTIONS

The following precaution shall be taking into account when using EXPLORER\_POINTING library:

- When a message like

EXPLORER\_POINTING >>> ERROR in *xp\_function*: Internal computation error # *n*

or

EXPLORER\_POINTING >>> WARNING in *xp\_function*: Internal computation warning # *n*

appears, run the program in **verbose** mode for a complete description of warnings and errors and call for maintenance if necessary.

## 9 KNOWN PROBLEMS

The following precautions shall be taken into account when using the CFI software libraries:

*Table 303: Known problems*

CFI library	Problem	Work around solution
xp_target_travel_time/ xp_multi_target_travel_time	Parameter "travel time-rate" not used in the calculations.	
xp_target_extra_specular_reflection	No implemented yet. Only the interface has been defined.	
xp_converter	No available yet with the updated interfaces	